

★ **BUMPER 148-PAGE ISSUE** ★

WIN A  
\$27,000  
4WD "ROCKY"

Registered by Australia Post  
publication No. NBP 0240

Australia's Top Selling Electronics Magazine

# Electronics Australia


NOVEMBER 1987

Aust\* \$3.50

NZ \$4.95 Incl GST

**EXCLUSIVE!**

## CANON'S ELECTRONIC STILL PHOTOGRAPHY

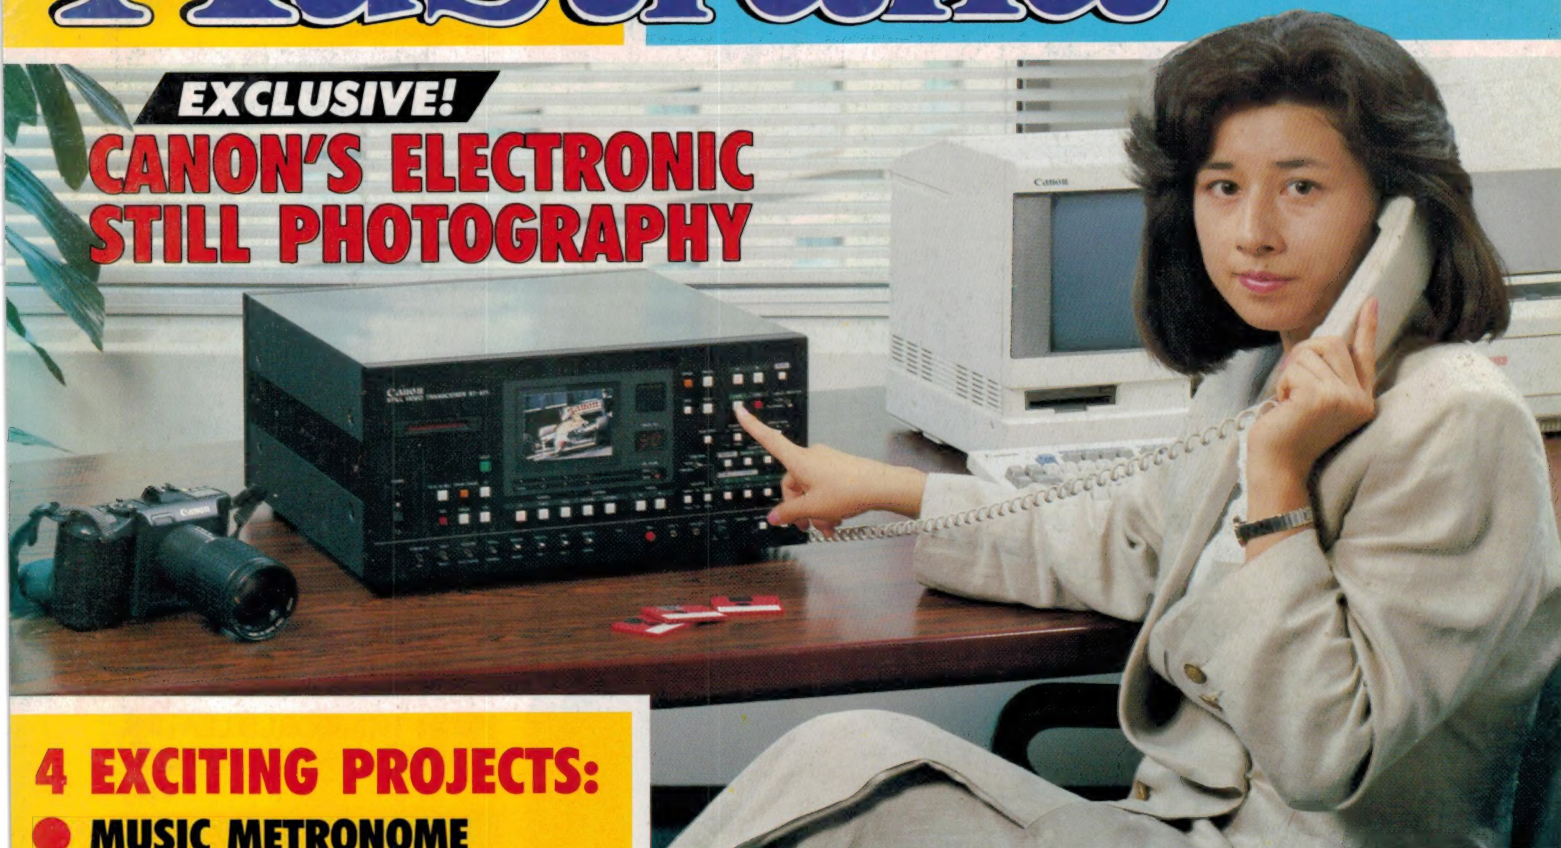

### 4 EXCITING PROJECTS:

- MUSIC METRONOME
- VOLTAGE/WIRING CHECKER
- VOICE-OPERATED RELAY
- ELECTRONIC FUSE

## AUSTRALIAN BREAKTHROUGH IN BATTERIES!

## TEST DRIVING A SPECTRUM ANALYSER

## MARINE ELECTRONICS




GoldStar

**SPECIAL  
FEATURE**



# Good as Gold

FLUKE  
1,000,000

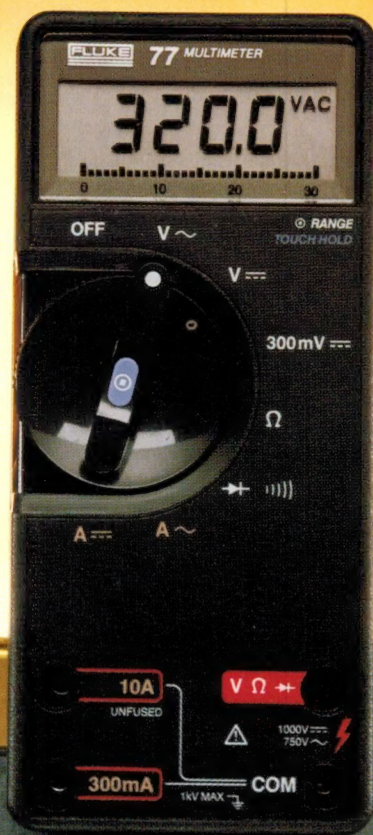

## The 70 Series Multimeters: the shining standard by which others are measured.

These multimeters are produced through advanced technology that assures you a wealth of product features. Giving you solid value for your money.

### Security of a 3-year warranty.

A 3-year warranty reduces your cost of ownership. So you don't have to pay the price over and over for lesser-quality multimeters.


### More features for your money.

Choose from either the basic 73 or the feature-rich 75 and 77. You'll find the features you need at the price you can afford. Touch Hold™ for capturing and holding readings. Audible tones to signal you for continuity. Autoranging for simple operation. And a sleep mode for extending battery life up to 2000 hours.

### Unsurpassed quality.

Like other Fluke products these multimeters offer you uncompromised quality at competitive prices. Visit your electronics representative today and get your hands on a 70 Series Multimeter. You'll see that brilliant performance is within your reach.

FROM THE WORLD LEADER  
IN DIGITAL MULTIMETERS.

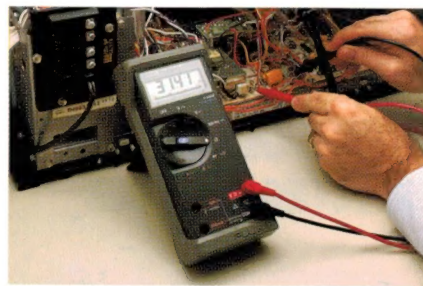

## FLUKE 73, 75, 77

0.7%, 0.5%, and 0.3% basic dc accuracy	3-year warranty
Analog/digital display	Audible continuity (75 & 77)
Volts, ohms, 10A, diode test	Range hold (75 & 77)
Autorange	Multipurpose holster (77)
2000+ hour battery life	Touch Hold function (77)

Talk to your local Elmeasco distributor about Fluke

- **A.C.T.** John Pope Electrical (062) 80 6576 • J Blackwood & Sons (062) 80 5235 • George Brown (062) 80 4355
- **N.S.W.** Arnes Agency 699 4524 • J Blackwood & Sons • George Brown 519 5855 Newcastle 69 6399 • Bryan Catt Industries 526 2222
- D.G.E. Systems (049) 69 1625 • W.F. Dixon (049) 61 5628 • Ebson 707 2111 • Macelec (042) 29 1455
- Novacastrian Electronic Supply (049) 62 1358 • Obial Pty Ltd 698 4776 • Petro-Ject 550 1388 • David Reid 267 1385 • Selectoparts 708 3244
- Geoff Wood 427 1676
- **N.TERRITORY** J Blackwood & Son (089) 84 4255, 52 1788 • Thew & McCann (089) 84 4999
- **QUEENSLAND** Auslec (07) 854 1661 • Petro-Ject (075) 91 4199 • St Lucia Electronics 52 7466 • Cliff Electronics 341 4655
- L.E. Boughen 369 1277 • Fred Hoe & Sons 277 4311 • The Electronics Shop (075) 32 3632 • Thompson Instruments (Cairns) (070) 51 2404
- **S.AUSTRALIA** Protronics 212 3111 • Trio Electrix 212 6235 • Industrial Pyrometers 352 3688 • J Blackwood & Sons 46 0391
- Petro-Ject 363 1353
- **TASMANIA** George Harvey (003) 31 6533 (002) 34 2233
- **VICTORIA** Radio Parts 329 7888 • George Brown Electronics Group 878 8111 • G.B. Telespares 328 4301 • A.W.M. Electrical Wholesalers
- Petro-Ject 419 9377 • J Blackwood & Sons 542 4321 • R.K.B. Agency 29 7336 • Sirs Sales (052) 78 1251 • Mektronics Co 690 4593
- Truscott Electronics 723 3094
- **W.AUSTRALIA** Atkins Carlyle 481 1233 • Dobbie Instruments 276 8888 • Protronics 362 1044

**FLUKE**®




# Electronics Australia

Volume 49, No.11

November 1987

AUSTRALIA'S LARGEST SELLING ELECTRONICS MAGAZINE — ESTABLISHED IN 1922

## Electronic photography

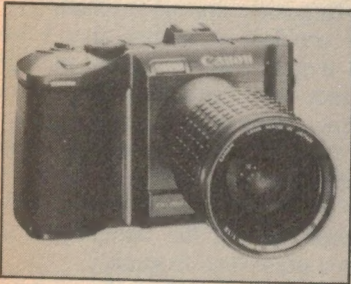

Well-known camera maker Canon has just released a revolutionary new camera which uses magnetic floppy disks, not film. See our story on page 22...

## Projects, projects

Our construction projects this month include a stylish metronome for musical types, a voice-operated relay, an electronic fuse and a simple voltage/continuity checker.

## Marine electronics feature

Our annual survey of electronics afloat. New developments in satnav, radar, communications, EPIRBs — catch up on it all, in our feature starting on page 112.

## ON THE COVER

The telephone transceiver unit for Canon's new "still video" photography (Courtesy Canon Australia). Also shown is the new GME-Goldstar GS951 Turbo marine radar (Courtesy Greenwich Marine) See our stories on pages 22, 112.

## Features

- 10 NEW LIQUID VANADIUM BATTERY *Developed here in Australia*
- 18 THE SMART BOOK *Another Aussie breakthrough!*
- 22 CANON'S NEW ELECTRONIC PHOTOGRAPHY *Uses floppies, not film*
- 99 REVIEW: THE BIT BLITZER 12E *Hayes-compatible modem*
- 112 MARINE ELECTRONICS FEATURE: *Overview, and who sells what*
- 114 MARINE ELECTRONICS FEATURE: *Satnav, radar, sounders etc*
- 119 MARINE ELECTRONICS FEATURE: *VHF and HF communications*
- 123 MARINE ELECTRONICS FEATURE: *Autopilots, EPIRBs & hifi*
- 126 REVIEW: IFR A-8000 SPECTRUM ANALYSER *(10kHz — 2.6GHz!)*

## Entertainment Electronics

- 6 WHAT'S NEW IN ENTERTAINMENT ELECTRONICS *Video, audio*
- 16 PIONEER'S PD-6050 CD PLAYER *New model gives more for less*

## Projects and Technical

- 32 THE SERVICEMAN *That terror of TV servicemen: "Ftss . . ."*
- 48 CIRCUIT & DESIGN IDEAS *Boat fridge timer, NiCad charger*
- 50 STYLISH METRONOME *Looks & sounds good!*
- 64 UNIVERSAL VOICE OPERATED RELAY *Speak and it's on . . .*
- 70 ANTENNAS FOR VLF RECEPTION *Matching preamps, too*
- 76 DC ELECTRONIC FUSE *Protects your experimental projects*
- 88 VOLTAGE & CONTINUITY CHECKER *Very handy, low in cost*
- 100 PRIMER ON SEMICONDUCTORS 1 *Introduction, short glossary*
- 103 KNOW YOUR TEST INSTRUMENTS 1 *The oscilloscope*
- 107 TELELINK MODEM — PART 2 *Final details, firing it up*
- 132 SOLID STATE UPDATE *Power op-amp with VMOS output*

## News and Comment

- 4 LETTERS TO THE EDITOR *Low distortion oscillator, ACS story*
- 5 EDITORIAL *DAT: Triumph or threat?*
- 26 FORUM *TV colour revisited, valves defended*
- 38 NEWS HIGHLIGHTS *Historic pulsar discovery, largest CRT*
- 46 SILICON VALLEY NEWSLETTER *National wins battle for Fairchild*
- 134 NEW PRODUCTS *SMD inspection station, low cost laser printer*
- 140 INFORMATION CENTRE *Answers to readers' queries*

## Departments

- 130 BOOK REVIEWS
- 142 50 AND 25 YEARS AGO
- 141 NOTES AND ERRATA
- 142 EA CROSSWORD PUZZLE
- 144 MARKETPLACE
- 146 COMING NEXT MONTH



**MANAGING EDITOR**  
Jamieson Rowe, B.A., B.Sc., SMIREE

**FEATURES EDITOR**  
Paul Grad B.Sc., (Physics)

**EDITORIAL STAFF**  
Rob Evans, CET (RMIT)  
Henk Mulder, HTS EE  
Mark Cheeseman

**DRAFTING**  
Karen Rowlands

**PRODUCTION EDITOR**  
Carmel Triulcio

**GRAPHIC DESIGNER**  
Brian Jones

**ART PRODUCTION**  
Alana Horak  
Larry Leach

**PRODUCTION**  
Kylie Prats

**SECRETARIAL**  
Naomi Lenth

**ADVERTISING PRODUCTION**  
Brett Baker  
Neville Lawton (Vic)

**ADVERTISING MANAGER**  
Selwyn Sayers

**PUBLISHER**  
Michael Hannan

**HEAD OFFICE,  
EDITORIAL & ADVERTISING**

180 Bourke Road, Alexandria, NSW 2015  
P.O. Box 227, Waterloo 2017.  
Phone: (02) 693 6620  
Fax number: (02) 693 2842 Telex: AA74488  
NSW Representative: Mark Lewis

**INTERSTATE ADVERTISING OFFICES**

**Melbourne:** 221a Bay Street, Port Melbourne, Vic. 3207.  
Phone: (03) 646 3111  
Representative: Nikki Roche

**Brisbane:** 26 Chermide Street, Newstead, Qld 4006.  
Phone: (07) 854 1119  
Representative: Bernie Summers

**Adelaide:** John Fairfax & Sons Ltd,  
101 Weymouth Street, Adelaide, SA 5000.  
Phone: (08) 212 1212  
Representative: Mike Mullins

**Perth:** John Fairfax & Sons Ltd,  
454 Murray Street, Perth WA 6000.  
Phone: (09) 481 3171  
Representative: Estelle de San Miguel

**New Zealand:** Rugby Press, 3rd Floor,  
Communications House, 12 Heather Street,  
Parnell, Auckland New Zealand.  
Phone: 796 648 Telex: NZ 63112 "SPORTBY"

**ELECTRONICS AUSTRALIA** is published  
monthly by The Federal Publishing Com-  
pany Pty Limited.

Copyright © 1987 by the Federal Publish-  
ing Company, Sydney. All rights reserved.  
No part of this publication may be repro-  
duced in any way without written permis-  
sion from the Publisher or Managing Editor.

Typeset and printed by Hannanprint, 140  
Bourke Road, Alexandria, NSW for The  
Federal Publishing Company Pty Ltd.  
Distributed by Newsagents Direct Distribu-  
tion Pty Ltd, 17 Doody Street, Alexandria  
NSW 2015

Registered by Australia Post — publication  
No. NBP 0240 ISSN 0313-0150

\*Recommended and maximum Australian  
retail price only.



# Letters to the editor

## Australian School of Electronics

I would be grateful if you or any of your other readers or staff could help me.

Last year in response to an advert in EA I undertook a "Practical Electronics Course" offered by the Australian School of Electronics, by correspondence. I had almost finished but have heard nothing from the school since paying my final instalment, and have been unable to contact anyone associated with it. I can only assume that it is now defunct.

I would still like to finish the course-work however, and would appreciate any assistance anyone could offer i.e., access to manual and study information and advice on completing the Learnakit oscilloscope. Please write or phone.

I imagine there may be other people in the same predicament and would be happy to pass on any information received.

Robert Brownlie,  
102 Watson St.,  
Campbell Qld 4152.

*Comment: To the best of our knowledge, the Australian School of Electronics is no longer in business. We hope another reader may be able to help.*

## Low distortion oscillator

I have been a follower of EA and its predecessors for the past 40 years, but this is the first time that I have been stirred to write to you.

I refer to a letter from N.V. of Parramatta, NSW, which appeared in Information Centre on p.124 of the September 1987 issue. Having constructed the "Ultra Low Distortion Oscillator" of December 1986, N.V. reported some difficulty in correctly calibrating the frequency control pot to agree with the supplied scale.

Despite your comment that no other similar reports had been received, I can heartily support N.V. as I have had ex-

actly the same problem — also, but probably coincidentally, with a kit from Altronics. No amount of fiddling with shunt resistors or substitution with another "linear" scale pot has brought the tuning range within coo-ee of the claimed characteristic. The effect was generally similar to that described by N.V., that is a very broad and minor frequency change up to about mid scale, followed by severe compression as maximum frequency was approached.

The problem is so bad that I have found it necessary to set the oscillator frequency with a counter when checking frequency response characteristics. In other respects, by the way, the oscillator performs very well indeed, but its utility is severely eroded by the calibration problem and the difficulty of setting to a prescribed frequency.

One wonders whether the prototype in fact used a relatively rare "inverse log" characteristic pot; a type in the catalogues, but not generally found on hobbyist suppliers shelves. If not, maybe a built-in Digital Counter is really the only way to go?

Anyway, keep up the good work! This note is more for support of your previous correspondent, (who seemed like a voice in the wilderness) than a complaint!

D.E. Graham,  
Wembley Downs, WA.

*Comment: Although the original is no longer available to check we doubt if it could have been fitted with an anti-log pot, or there would have been many more complaints besides yourself and N.V. We've asked Altronics to contact you, to see if they can help track down the cause.*

## Appliance Control Systems

I refer to your article in the September 1987 edition of *Electronics Australia*, concerning the fate of Appliance Control Systems.

In summary, this article could read "Small Australian Battlers lose every-

## DROP US A LINE!

Are you concerned about something to do with electronics, and believe that others ought to know about it? If so, feel free to put pen to paper, or fingers to keyboard, and send us a Letter to the Editor. If it's clearly expressed and on a topic of interest, chances are we'll publish it — but we do reserve the right to edit those that are overlong, or potentially libellous.



thing due to foul play of banks and other finance companies”.

Now, I am too a small battler in a very similar field. I do not like nor trust banks and financial institutions either. However, in all fairness, I think the coin has two sides.

Whilst I do not know Mr Larsen, I can assure you that at least one of his Australian clients has a few unkind things to say about ACS.

On the financial aspect, I can only state that if ACS's order books were in fact full, and they had a 12-month cash flow projection with some reasonable figures, even our jaded trading banks would have lent against this cash flow.

I regret to say, but from the outset it rather looks that Mr Larsen may have over-optimistically invested too much into equipment and personnel, and his astuteness perhaps leaves something to desire in dealing with financial advisers.

D. Toth, Managing Director,  
Communitron (Aust),  
Gladesville, NSW.

## Stereo AM/FM tuner problems

While visiting Sydney earlier this year, I purchased two Jaycar kits for the EA 60/60 amp and AM/FM stereo tuner. I have no formal technical training, just sheer enthusiasm and a basic understanding of circuit construction.


My decision to purchase the 60/60 and the tuner was spurred by confidence from having successfully completed, and unaided, your earlier 40/40 MOSFET amp.

Construction of the 60/60 amp has been successful, after your revised instruction in the May 1987 edition of EA. I did lose my MJ55003/MJ5004 pairs initially, until I performed the modifications prescribed. I agree that this is an exceptionally good amp, and I am very pleased — thank you.

Alas! (to put it mildly) the construction of the tuner is another story. Having spoken to local professional people, to fault find this circuit is considered a sizeable task. However I am determined to resolve my problems myself, if I can.

Initially I would prefer to liaise with another New Zealand constructor of the tuner and your assistance in finding him/her through your magazine would be appreciated. Please publish my address for this purpose. Anyone able to help could also phone me on (04) 366331, collect.

John Hartley,  
12 Mapplebeck Street,  
Titahi Bay, Wellington, NZ.



# Editorial Viewpoint

## DAT: Triumph or threat?

I've just had the opportunity to check out an advance sample of one of the new digital audio tape (DAT) decks, thanks to Pioneer Electronics. It's been too late to fit the story into this issue, unfortunately, so you'll be able to read all about it next month. But in a nutshell, DAT is simply superb — the closest thing to perfection in sound recording that most of us are ever likely to hear.

Viewed as a development in sound recording technology, then, DAT is obviously a triumph — a true milestone in the relentless striving on the part of human beings to capture sounds faithfully. A striving that was first crudely satisfied with Thomas Edison's phonograph, and has promoted continuous evolution since then.

Sorry for the purple prose, but DAT really is impressive. There's no doubt in my mind that it's the beginning of a whole new era in recording, and the beginning of the end for conventional tape recorders. You'll see what I mean next month.

What worries me is the attitude of various sections of the music and hi-fi industries, which seem determined to prevent us from getting DAT — or at least delaying it as long as possible. There are strong whiffs of neo-Luddism in the air.

You can't blame the CD makers for being nervous, after they've just had to invest big sums of money into hi-tech CD pressing plants. But just how far should they and others be allowed to go in holding back technical progress?

I'm particularly concerned about the CBS moves to introduce its Copycode system to all future vinyl and CD recordings, to prevent copying via DAT. From what I can find out, this involves notching out a 300Hz band of frequencies, 60dB down and centred on 3.84kHz. The idea being that DAT makers would be forced to make their recorders look for this frequency gap, and refuse to record anything in which it is present. How's that for ruining the performance of CD recordings, just to stop DAT owners from copying them!


Although I'm by no means one of the audio purist brigade who swears by polarised speaker cables and gold-plated RCA sockets, there's no way I'd knowingly buy any recording with a ruddy great notch slap-bang in the middle of its spectrum. And I'm sure I won't be alone. I only hope CBS doesn't manage to convince the rest of the recording industry to adopt this crazy idea.

*Jim Rowe*



## What's New In

# Entertainment Electronics

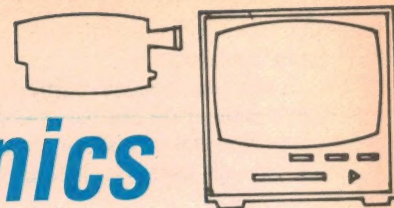


### Sony releases 65cm stereo colour TV

The KV-27XS AS Trinitron 65cm (27") colour television from Sony graphically illustrates how far technology has come since colour TV was released here in Australia in 1975.

The Super Trinitron fine pitch tube is designed to meet today's needs for stimulating home entertainment. With both composite video and RGB inputs the KV-27 is compatible with a variety of sources such as home computers, VCRs or video disc players by way of the 21-pin SCART connector.

The KV-27 is supplied with a multi-function remote control for normal television operation plus access of the optional teletext facility, which can be installed if required. The built-in stereo tuner for TV reception can also decode bi-lingual broadcasts. The unit also has external speaker connection, for optional speakers, together with audio

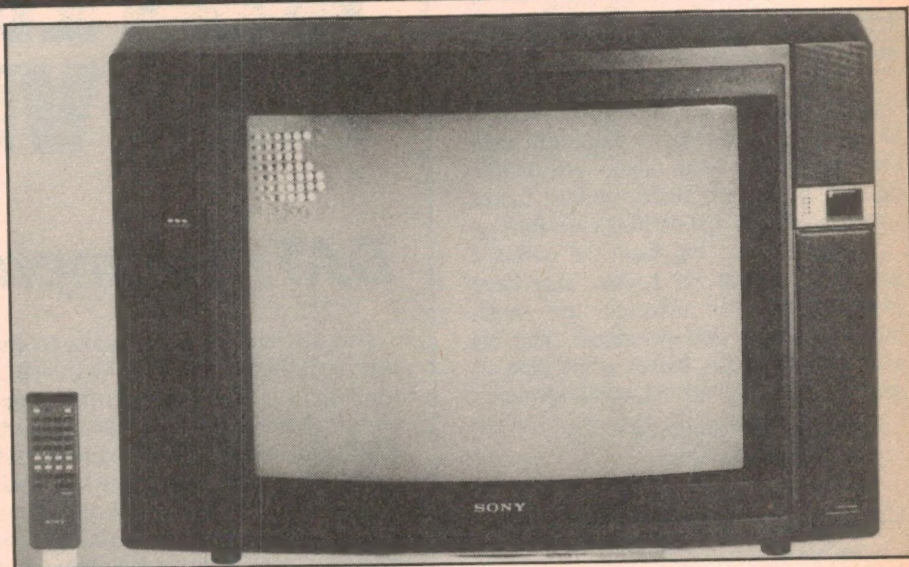

outputs allowing integration with an existing hifi system for enhanced stereo sound enjoyment.

It has a stylish European designed cabinet with a black finish, to blend in with the home audio/visual environment

or to form the centre piece of any lounge or dining area.

The KV-27XS AS is available now through the Sony dealer network at the suggested recommended retail price of \$2,199.

### "Dynamic coil" magnetic cartridge

The new Garrott P-77 magnetic pickup cartridge features a dynamically balanced generator system, which is claimed to incorporate the best features of moving coil, variable reluctance and moving magnet systems. The new system is said to be capable of handling the highest groove modulation swings with full control, due to careful balancing of its pivoting system.

A further feature of the cartridge is a gem-quality, grain-orientated parabolic diamond stylus, polished to a mirror finish to ensure improved tracking of high frequency groove modulation and minimal groove damage.

Performance of the Garrott P-77 is said to be exceptionally clean and accurate, with fast dynamic response and excellent channel separation. The output is sufficient to feed directly into a normal magnetic pickup input.

Further details are available from Len Wallis Audio, Shop 9, "The Village", 43-45 Burns Bay Road, Lane Cove 2066.

### Compact VHS-C camcorder

National Panasonic has released its NV-MC5, the "baby brother" to its already successful compact video camcorder, the NV-M5A. Overall size of the camera has been reduced by the use of the VHS-C video cassette. This still uses 1/2" tape, but recording length has been reduced to 30 minutes in SP or 60 minutes in LP mode — where NV-M5A offers up to a full four hours.

The new, super small model is ideal for the person who wants a simple, compact, lightweight model for "snap" shooting, the differences being in the length of the tape and editing functions. (The M5A allows extra editing functions such as dubbing and fade in/ fade out.)

The new VHS-C playback system can be operated either directly through a television set or, for LP mode, via a VHS cassette adaptor, on any standard VHS VTR.

All accessories including carrying case, VHS cassette adaptor, rechargeable battery pack and VHS-C cassette tape come with the MC5, which weighs

in at just 1.5kg.

In many ways, the NV-MC5A is very similar to its predecessor, employing the same CCD (charge-coupled device) image sensor which saves on space and weight, but still allows faithful reproduction of colour and resolution as well as virtually eliminating ghosting and after-imaging.

Other features include:

- Piezo auto focus system
- 1/1000 sec high speed shutter





- auto trace white balance
- 10 Lux (low light) shooting capability
- 6X power zoom lens with macro capability for wide angle to telephoto shots and close-ups of small objects.
- HQ (High Quality) picture

## New VCR has simple, no-fuss timer

How many times have you wanted to record a programme on your video cassette recorder, but have forgotten how to set the controls so that the machine will start and finish at the right time, and you can't find the instruction book?

Sanyo claims to have come up with a solution to this problem by incorporating a feature called "QSR" in some of its new models. "Quick Start Recording" is a simple, two button control that lets you set the start time up to 24 hours in advance, to record up to four hours or until the tape finishes.

For example, on Sanyo's New VHF-3100 VHS video cassette recorder, all you have to do is press the "start" button and the time will go forward on the clock display until the button is released. The unit is then programmed to start at that time. The second "length" button is pushed and the time is displayed in minutes. Simply release this button and the recorder will automatically stop at that time.

The recorder's ability to be set in one minute increments is particularly useful when recording material off stations which do not necessarily run their programmes in neat 30-minute segments.


Apart from its QSR control, the VHR-3100 has a number of other attractions such as HQ (High Quality) picture technology, a 30 memory synthesiser tuner, and nine-times high speed colour picture search in forward and reverse, still and frame advance playback. Available from Sanyo dealers, the VH-3100 has a recommended retail price of \$719.00.

## Weatherproof speakers

Altronics in Perth has released a new range of Australian-made weatherproof loudspeakers and sound columns.

Branded "Redford", there are five models with power ratings from 10 to 40 watts. Each is available in either Black or White.

As home stereo extension speakers, the smaller 16-ohm models are considered ideal for paralleling across the main speaker 8 ohm lines. The higher powered models are fitted with multitap line transformers and are designed for professional sound and PA applications.

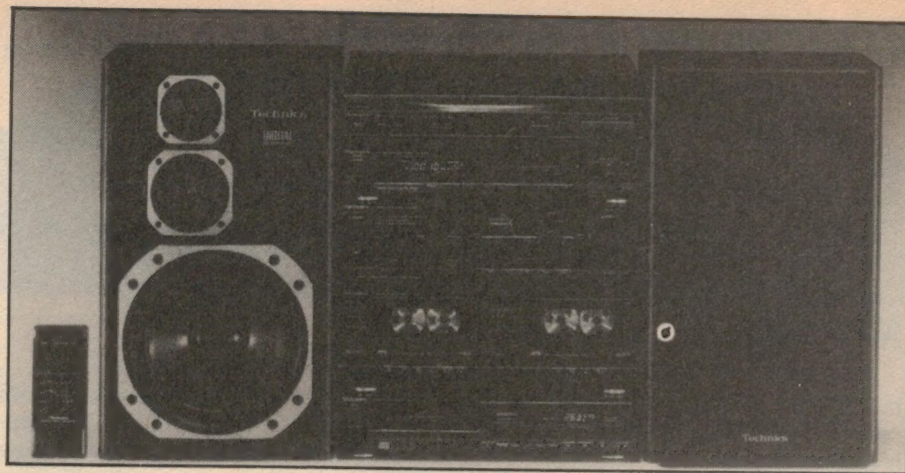

## Enhanced "midi" system from Technics

Technics' new Midi Series has been further improved in response to a growing demand for hifi quality in the compact sound systems segment of the market.

One of the most notable differences is the change in width from 315mm to 360mm, providing not only more of a "hifi look", but also allowing more features to be added to these systems.

A number of other improvements can be found throughout the range. Three-way speakers have replaced two-way and new Class A circuitry in the amplifiers has been employed for cleaner, clearer performance. Also the top three systems feature Dolby B/C for greater noise reduction. Power output range has also been increased, now going from 20W up to 80W.


The new "Digital Response" speakers offer a number of advantages over the

previous bookshelf speaker models. Firstly, laminated polyester is used to reinforce the speaker cone paper giving the woofer increased rigidity and more powerful bass response, often lacking in bookshelf speakers. Secondly, the cabinets' rounded baffle edges prevent diffraction to improve directional characteristics.

Other changes include digital volume displays, upgrading to digital tuners from analog tuners and 24-position station selection across all models.

All four models in the range, starting with the X800, the X830, the X840 and finally the X880 can be operated by infra red remote control.

Each model offers its own set of features, some including optional seven-band graphic equalizer and compact disc player.

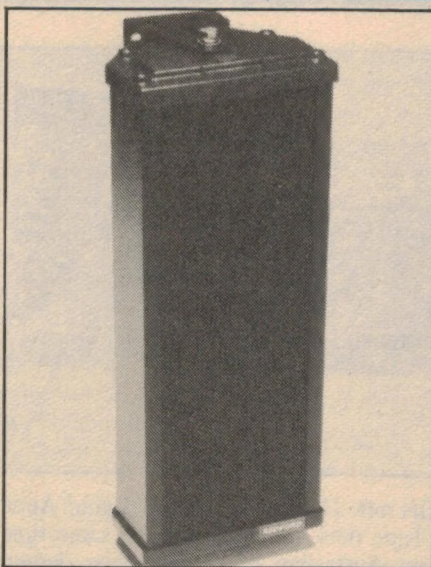

The drivers have been chosen for wide range, low distortion, mid range "presence" (essential for high grade


vocal work) and high efficiency in general. For short term use, the drivers will safely handle 150% of rated power. Acoustic wadding is used to dampen bass resonance. Foam plastic and cloth are sandwiched between baffle and front grill to prevent water ingress. A first for "Redford" is the use of a patented cone moisture repellant process for all models.

The rugged vibration free enclosures are constructed from die extruded heavy gauge aluminium and finished with durable industrial black powercoat enamel. The speaker ends are sealed via gaskets and tough moulded "LURAN S" UV resistant end caps.

The end result is good looks, together with assured durability for the Australian environment.

Enquiries should be directed to Altronic Distributors, 174 Roe St., Perth 6000. Phone (09) 328 2199.



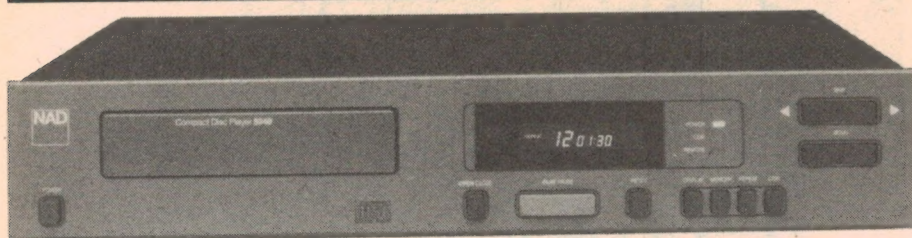

## Mid-price CD players from NAD

NAD has released two new CD players, models 5220 and 5240, which continues this firm's tradition of no-frills high performance.

Both players are equipped with full-disc automatic repeat and programmable memory playback of up to sixteen selections in any order. The economical NAD 5220 adds a timer play feature that automatically plays a disc when the power is switched on. So, by plugging the player's AC power cord into a clock timer, you can provide your own choice of wake-up music in the morning instead of depending on a clock radio.

The mid-price NAD 5240 offers the convenience of wireless remote control, including remote volume control, plus NAD's new CDR (Controlled Dynamic Range) circuit. One of the basic virtues of the Compact Disc is its ability to convey the full dynamic contrast of live music, but in some situations that dynamic range is inappropriate. When listening late at night, when copying CDs onto cassette tape for car playback, or when you want to enjoy the CD's convenience and clarity in a playback system that has limited output power, wide

dynamic range can be a liability.

NAD's new CDR circuit deals with these situations by monitoring and controlling the dynamic range of the playback signal. It operates smoothly and unobtrusively to raise the volume of low-level and average-level signals, while leaving the highest-level peaks alone. Thus it tames extreme dynamic contrasts, ensuring that the sound won't become either too soft or too loud, while having no other effect on the sound. The frequency range, tonal balance, and stereo imaging are unaltered. When not in use, the CDR circuit is completely bypassed.

Other features of the new players include a low-inertia three-beam laser pickup, a solid metal chassis for maximum stability, precise alignment and long-term reliability and an output circuit designed using the "less is better" approach, with only a handful of electronic components in the signal path.

Recommended retail prices are \$499 for the model 5220, and \$699 for the model 5240. Further details are available from Fred A. Falk, 28 King Street, Rockdale 2216.



## CD matching unit

Arista Electronics has extended its range of audio accessories with the new compact disc matcher Model No CDA-3.

Many amplifiers have only one auxiliary input, so as the home entertainment centre expands with the addition of a compact disc player and/or VCR, the inconvenience of having only a single auxiliary input arises.

The CDA-3 will allow the connection of both units to the amplifier and allow switching between either unit. The other advantage of utilizing the CDA-3 is its signal matching capabilities. The majority of compact disc players have an output voltage of 1.6 or 2 volts, whereas the input voltage of an average auxiliary input on an amplifier is 750 millivolts. The CDA-3 matcher will optimise the balance between input and output by allowing you to select between several different voltages.

For further information and the name of your nearest stockist contact Arista Electronics, 57 Yore Street, Silverwater 2141.

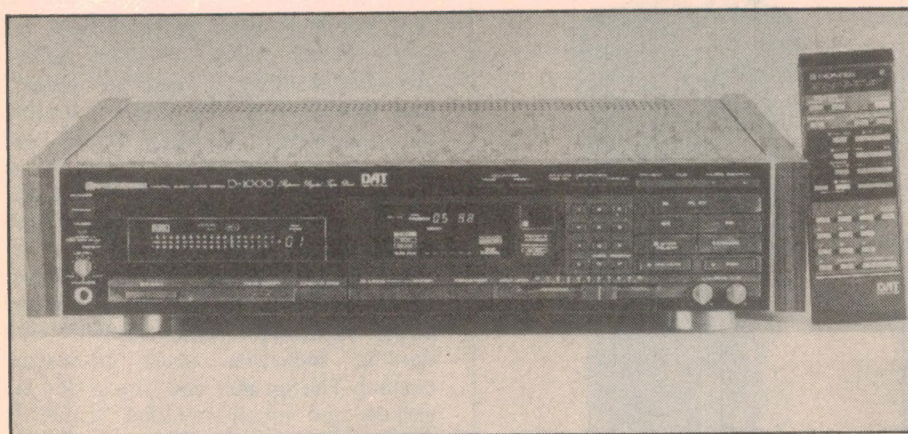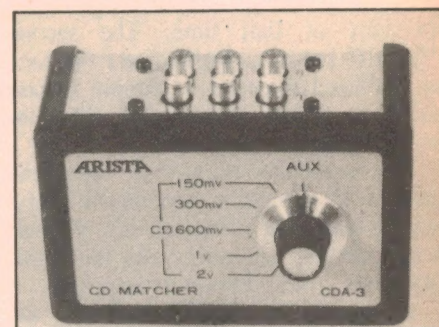

## Pioneer demonstrates its DAT recorder

Pioneer Electronics has thrown its hat into the DAT ring, with the release of

its new D-1000 Reference Digital Audio Tape deck in Japan. At the same time, its Australian office has been demonstrating a sample deck in Australia, and hinting that it may be released here "soon".

Important features of the new D-1000 include four direct-drive motors, double digital filtering on recording and playback for extremely low distortion, separate digital and analog power supplies and transformers, a heavy-duty construction to minimise vibration and resonance, and copper-plated chassis to provide better shielding. It uses a single rotary head and 16-bit linear quantization at 48kHz for record/play, with the ability to also replay tapes recorded at 44.1kHz and 32kHz.

Quoted frequency response is 3Hz to 22kHz within 0.5dB, with 95dB signal to noise ratio, distortion below .003% and wow/flutter virtually unmeasurable. In short, mouth-watering performance — even better than CD.

We're hoping to get hold of the sample machine shortly, to give you a test report next month.



# THE AVTEK ANSWERS

QUALITY AUSTRALIAN MODEMS AT LOWER PRICES

## MEGAMODEM - NEW MODELS

DUE IN STOCK - NOVEMBER

New Model - New Price

Don't buy imported/unsupported modems when Australian designed and manufactured models cost less. Compare the features - look at the value.

(12 month extended warranty on both Megamodems)

### Specifications:

Speeds	300 Baud Full Duplex - both models 1200/75 for Viatel - model 123
Data Standards	1200 Baud Full Duplex - both models V21, V22 - both models V23 - 123 model only
Command Set	Hayes with extensions
Interface	CCITT V24 (RS232)
Data Format	Asynchronous
Power Consumption	<2 watts
Size	27(H) x 120(W) x 157(D)mm
Indicators	8 LEDs
Internal Diagnostic Loop Back	



MODEL 12 \$375  
MODEL 123 \$449  
SAVE UP TO \$250  
ON OLD PRICE

## PC MEGAMODEM

Same features as the Megamodem but plugs into the expansion Bus of your IBM or compatible.

1/2 card will fit any slot as it is the correct

height. Make full use of all your expansion slots.  
Use Com1 or Com2.  
Will run with almost all communication packages.

MODEL 12 \$375  
MODEL 123 \$449

## Multimodem II - Australia's No.1 modem

Australia's top selling modem now offers even more. You get:

**Reliability.** State of the art digital filters for reliable data transfer, even on noisy lines.  
**The Expansion Bus.** An Avtek exclusive. Developments can be plugged straight in.  
**Total Flexibility.** Both 300/300 and 1200/75 (Viatel) at the flick of a switch.

**Autoanswer as standard.** A reliable and instant "ring detect" circuit is completely independent of the strength of the ring.



NOW ONLY \$299  
SAVE \$50  
ON OLD PRICE

## MINIMODEM II - leader in the value stakes!

Superb performance for those on a limited budget. The Minimodem II offers the same digital filtering and error correction as the Multimodem but at a much lower price. Full 300/300 baud and 1200/75 baud (Viatel standard) are provided at lower cost than some 300 baud only modems - check for value and you'll find Minimodem wins every time. All prices include Sales Tax



STILL ONLY \$199

We also stock a large range of RS232 cables and software.  
Please phone for further details.



# AVTEK

PO Box 651 LANE COVE NSW 2066

Telephone: (02) 712 3733

Facsimile: (02) 713 9598



MAIL  
ORDER  
WELCOME



Reseller enquiries  
Jeremy Swallow  
(02) 712 3122



# New battery could be just what the world needs

*An efficient, easily rechargeable and maintenance-free battery, conceived and developed by a lady researcher at the University of New South Wales, could prove to be what many people have been trying to find for a long time.*

by PAUL GRAD

As important as batteries are in many applications, they still possess several serious limitations, such as low power and a short life.

To overcome those limitations, a lot of research has been done lately throughout the world. It seems a real breakthrough has been achieved at the University of New South Wales, where a new type of battery has been developed.

In this new battery type the EMF is created by two liquid solutions, each of a salt of vanadium but at different levels of oxidation, separated by a membrane.

The brainchild of Dr Maria Skyllas-Kazacos, a senior lecturer at the University's School of Chemical Engineering and Industrial Chemistry, it is based on the "redox cell" concept.

"Redox" stands for reduction and oxidation, which refer to the absorption or donation of one or more electrons by a substance involved in a chemical reaction. Oxidation and reduction always occur together, because they refer to reactions in which substances exchange electrons. The expression "redox cell" is used because these cells use redox couples — two substances exchanging electrons in an oxidation-reduction reaction — in solution.

While in a conventional storage battery cell, such as in a lead-acid or nickel-cadmium battery, the EMF is created by two solid electrodes immersed in an electrolyte, in a redox cell the EMF is created by two solutions, or in other words, two substances dissolved in an electrolyte. The redox cell also

has two solids immersed in the electrolyte but, instead of creating the EMF as in the case of a conventional cell, in this case they are inert and act solely as electrical contacts.

Each cell of the new battery is made up of two half-cells, one positive and one negative. Both contain a solution of vanadyl sulphate ( $\text{VOSO}_4$ ) and sulphuric acid in water. Each half-cell is connected, via a pump, to a tank containing additional quantities of the vanadyl sulphate solution (see diagram).

The battery's terminals are two carbon-sheet collector plates.

## Conventional batteries

For the benefit of those readers who are not familiar with the structure and the workings of conventional, commercially-available batteries such as the lead-acid and nickel-cadmium batteries, we will backtrack here.

We will try to explain briefly how those conventional batteries work. It should then be possible to understand how the new battery differs from them and what advantages it may have over them.

This will probably interest most readers, because the chemical reactions within such batteries are extremely complex and in some cases still not completely understood.

The conventional lead-acid and nickel-cadmium batteries are so-called secondary storage batteries. These have to be charged before they can develop a voltage difference between their terminals. Charging them, by passing a DC current through them, causes them to

store energy as chemical energy which is delivered back as electrical energy during discharge.

To set up a battery we need two electrodes, one positive and one negative, which provide the battery's voltage, and a conducting medium — the electrolyte — between the two electrodes, which allows a current to flow through the battery and through an outside load connected across the battery's terminals.

It is the movement of ions in the electrolytic solution, attracted by either of the electrodes, which constitutes the current through the battery. (Ions are atoms or groups of atoms which have an electrical charge. While normally atoms are electrically neutral, possessing an equal number of electrically-positive particles called protons and electrically-negative particles called electrons, they often acquire or lose electrons, becoming negatively or positively charged. They are then called ions.)

In a lead-acid battery both electrodes are initially of lead sulphate ( $\text{PbSO}_4$ ) and the electrolyte is distilled (pure) water. Charging the battery produces several complex chemical reactions, finally resulting in a fairly stable system in chemical equilibrium. There will then be a voltage of 2V across the battery's terminals.

The charging current causes some of the water molecules to break down into ions. Each molecule of water that breaks down provides one negative ion of oxygen with two excess electrons ( $\text{O}^{2-}$ ) and two positive ions of hydrogen each lacking one electron ( $2\text{H}^+$ ).

The positive hydrogen ions then start breaking down both electrodes, by attracting negatively charged sulphate ions ( $\text{SO}_4^{2-}$ ) out of them. This leaves the electrodes with positively charged lead ions ( $\text{Pb}^{2+}$ ).

On the negative side of the charging source, electrons supplied by the source are attracted to the positive lead ions and neutralise them, producing ordinary soft lead, also called spongy lead. While



the battery is charging, then, the electrode connected to the negative terminal of the DC source is transformed from lead sulphate to a mixture of lead sulphate and lead and finally to pure spongy lead when the battery is fully charged.

On the other electrode, which is connected to the positive terminal of the DC source, the same positive lead ions are created initially, but instead of acquiring electrons these electrodes donate electrons which are attracted to the DC power source. Thus here the positive lead ions ( $Pb^{2+}$ ) donate further electrons becoming even more positive ( $Pb^{4+}$ ). Their charge is then strong enough to attract negative oxygen ions from the (water) electrolyte and combine with them to become electrically-neutral lead peroxide ( $PbO_2$ ).

Thus this electrode begins as lead sulphate, becomes a mixture of lead sulphate and lead peroxide while the battery is charging, and becomes pure lead peroxide when the battery is fully charged.

The combination of the water's positive hydrogen ions with the negative sulphate ions from the electrodes produces sulphuric acid ( $H_2SO_4$ ). Therefore, as the charging of the battery takes place the electrolyte is transformed from water to a mixture of water and sulphuric acid. When the battery is fully charged the electrolyte contains a high percentage of sulphuric acid.

When the battery is fully charged, the negative electrode (which is connected to the DC source's negative terminal) no longer contains any sulphate ions to combine with the positive hydrogen ions, and the positive electrode (which is connected to the DC source's positive terminal) no longer absorbs the negative oxygen ions.

If we now continue to supply a charging current, the hydrogen ions continue being attracted to the negative electrode due to the electrons supplied by the charging DC source, even though the negative electrode no longer contains sulphate ions. And the oxygen ions are still attracted to the positive electrode, because electrons continue being extracted from it by the DC source and it retains a positive charge, even though the electrode no longer contains the strongly-positive  $Pb^{4+}$  ions.

Electrons supplied by the charging current leave the negative electrode and combine with the hydrogen ions to produce ordinary, electrically neutral hydrogen gas bubbles. The negative oxygen ions give up electrons to the posi-

tive electrode but, instead of combining with positive lead ions which are no longer available, they combine among themselves to become ordinary electrically neutral oxygen gas bubbles.

These gas bubbles rise and leave the battery through vent holes. If we continued to charge the battery we would not change the water into more


sulphuric acid. Instead, the water would be lost as hydrogen and oxygen gases, and the acid concentration would become excessively high, damaging the electrodes. Also, the escaping gases are dangerous because they are explosive.

But assume that we have not overcharged, or at least not significantly overcharged, the battery.



**Dr Maria Skyllas-Kazacos and Dr Miron Rychcik with an experimental vanadium redox cell.**



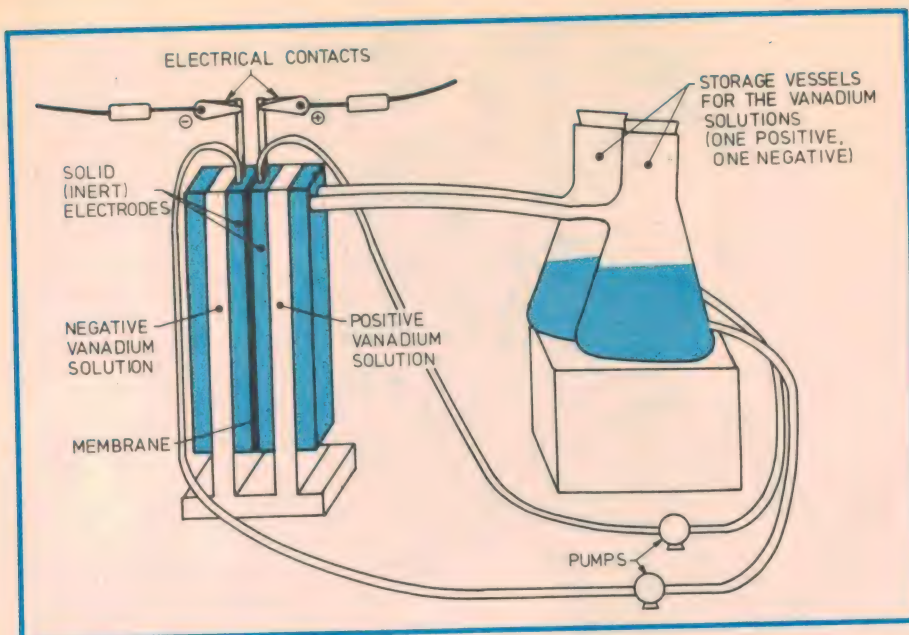

*This sketch of an experimental redox cell is somewhat unclear, because the University of New Wales' researchers working with the cell don't want to reveal too much about it.*

As soon as the charging current stops the sulphuric acid starts a reverse chemical action. The negative sulphate ions from the acid react with the spongy lead in the negative electrode and the spongy lead gradually changes back to lead sulphate. However, now the excess electrons originating from the sulphate ions (two excess electrons for each ion  $\text{SO}_4^{2-}$ ) remain in the electrode as free electrons, and there is an accumulation of negative charge in the electrode.

When enough negative charge is built up, the acid's negative sulphate ions are repelled from the electrode and there is no further chemical action.

The acid's negative sulphate ions also attack the positive electrode. They cause each lead peroxide molecule to break down into two negative oxygen ions and one positive lead ion. The oxygen ions are attracted into the electrolyte by the acid's positive hydrogen ions. When enough oxygen ions leave the electrode a positive charge is built up by the lead ions left behind. Thus the positive electrode also gradually changes back to lead sulphate.

Again, when this positive charge is high enough the acid's positive hydrogen ions are repelled from the electrode and there is no further chemical action.

Therefore, some time after charging has stopped, the negative electrode is a negatively-charged mixture of spongy lead and lead sulphate, and the positive electrode is a positively-charged mixture of lead oxide and lead sulphate.

During these reactions hydrogen and oxygen ions combine to produce water again, so that the sulphuric acid becomes more diluted.

The battery is now in a (fairly) stable equilibrium, with a voltage of about 2V across its terminals.

When a load is connected across the battery's terminals, electrons leave the negative terminal to go to the load and the charge on the negative electrode decreases, allowing the sulphate ions of the acid to again react with the electrode, again producing the electrode's original lead sulphate.

When electrons leave the negative electrode to go to the load, the same number of electrons are attracted from the load to the positive electrode. Here they combine with the positive lead ions which then combine with the sulphate ions from the electrolyte, also resulting in the formation of the positive electrode's original lead sulphate. Also, the sulphuric acid becomes still more diluted.

The net result of the chemical reactions involved is that while the battery is being discharged most of both electrodes change back to lead sulphate and most of the electrolyte changes back to water.

After a while the battery cannot generate sufficient voltage between its terminals and is said to be discharged (nominally when the voltage across its terminals has fallen to about 1.75V). It can be recharged over and over again,

however.

These lead-acid batteries have seen wide application and have been enormously useful but they have serious limitations. Probably the most important is the relatively short time during which a useful current can be drawn from them.

A battery is rated in ampere-hours. This is the product of the current drawn from the battery and the number of hours during which the current is drawn. For example, if a battery is rated at 100 ampere-hours, this means that it will supply, for example, 5A for 20h, or 10A for 10h, before its EMF drops to the discharge level (1.75V per cell).

Storage batteries are usually rated for 20h. Thus, if the battery is rated at 100 ampere-hours, this means it will supply 5A for 20h.

The physical size of the battery does not affect its EMF, but it does affect the amount of current the battery can supply. The larger the area of the electrodes, the more current the battery can supply. Of course, the less current the battery is made to supply, the longer it will last before reaching the discharge level.

By connecting various battery cells in series we can obtain a voltage equal to the sum of the voltages of all cells in the series connection. We can thus obtain high voltages from a battery installation, even though each battery cell provides only a small voltage.


Large battery installations are used as backup power systems in various applications. Usually, however, battery installations are suitable only as a short-term backup, for example, during a mains power failure.

Another disadvantage of lead-acid batteries is that the electrodes tend to deteriorate if the battery is allowed to remain partially discharged for a long time.

Also, even when the batteries are carefully recharged, some water is usually lost in the form of hydrogen and oxygen gases and the acid content gradually becomes high enough to cause "sulphation". This is a process by which areas of the electrode become hard and brittle and do not react properly with the electrolyte.

Nickel-cadmium (Ni-Cd) batteries, which are of a type called alkaline batteries, work similarly to the lead-acid batteries. Each cell of a Ni-Cd battery has a positive electrode of nickel dioxide ( $\text{NiO}_2$ ) and a negative electrode of pure cadmium (Cd). The electrolyte is



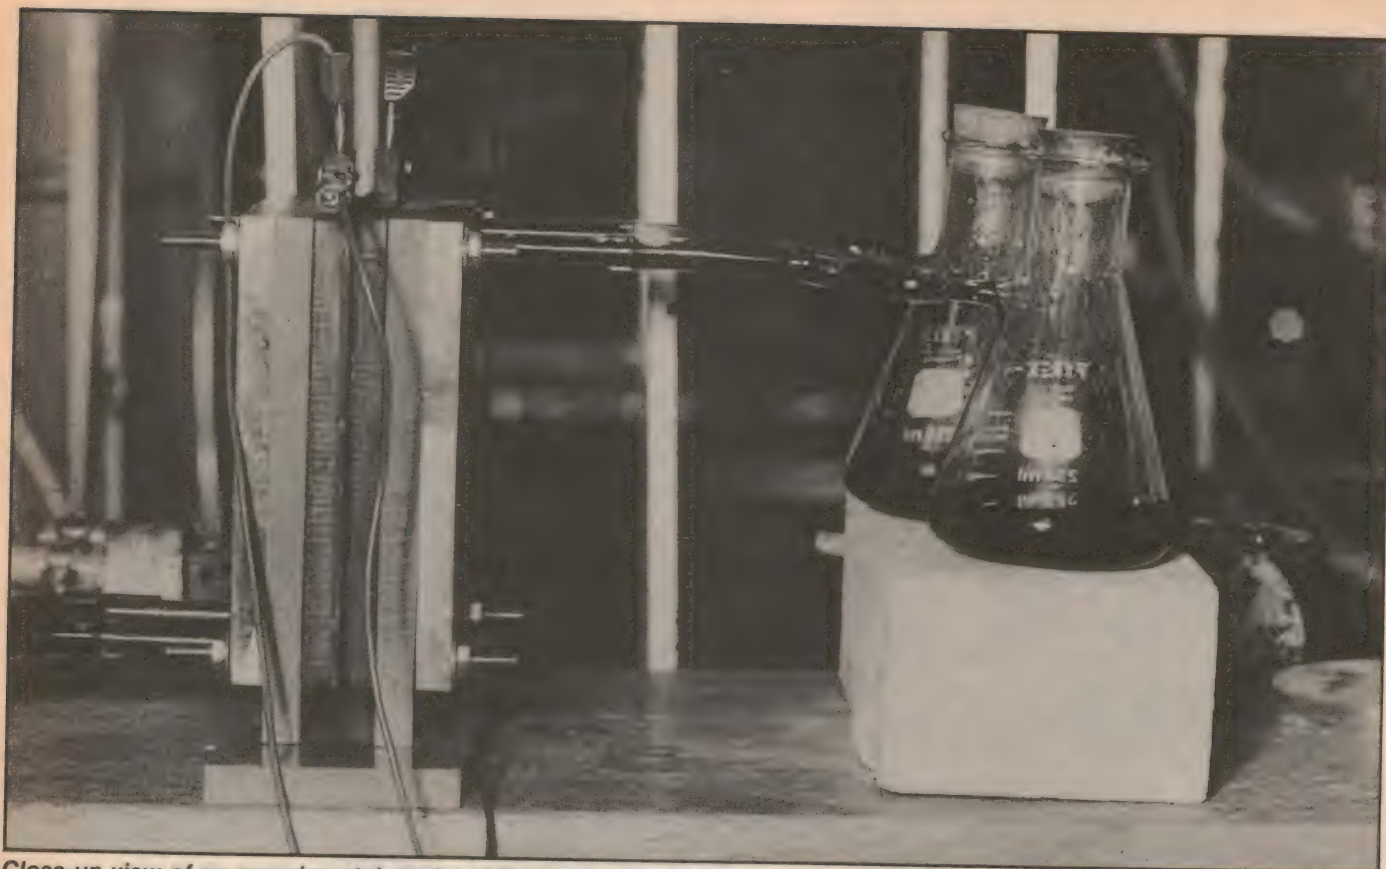

*Close-up view of an experimental model of the new redox battery cell. The two electrolyte storage vessels on the right will be replaced with storage tanks in any commercial version of the battery. On the left are both half-cells separated by a membrane.*

potassium hydroxide (KOH) mixed with distilled water.

In these batteries, while the electrode materials change during charging and discharging, the electrolyte does not change.

### Redox differences

A redox battery's basic difference from the conventional batteries such as the lead-acid and nickel-cadmium types is that the voltage between its terminals is created, not as a consequence of chemical reactions between one or two electrodes and an electrolyte, but by a change in the level of oxidation (an exchange of electrons) between two adjoining solutions separated by a membrane.


The redox battery is charged by means of a DC source connected across its terminals, as in conventional batteries. This causes changes in the oxidation states of the vanadium salt ions in solution. All chemical changes brought about as a consequence of charging the battery take place in the solution.

When in solution the vanadium salt ionises, each vanadium atom donating four electrons and becoming a positive ion with a +4e charge,  $V^{4+}$ .

When the battery is charged, different


oxidation reactions take place in each half-cell. These reactions are:

At the positive half-cell,  
charge



←  
discharge

At the negative half-cell,  
charge



←  
discharge

The vanadium salt solutions are deliberately prepared to undergo the reactions described, to obtain 1.5V between the terminals of each cell, and to avoid problems such as the deposition of metallic vanadium.

The solutions to which the vanadium atoms belong are fairly complex. The vanadium salts do not necessarily have the same charge as the vanadium ions in them.

The two half-cells are separated by an ion-selective or microporous membrane. Either a sulphonated polyethylene anion selective membrane (allows only negatively-charged ions through) or a polystyrene sulphonic acid cation selective membrane (allows only positively-

charged ions through) was used in the University's experiments.

The main function of the membrane is to keep the two solutions in each half-cell separate, thus maintaining the voltage difference between the two half-cells. In the cells of conventional batteries the two solid electrodes are kept naturally separate but in the redox cell the absence of a separating membrane would cause the two solutions to mix, gradually eliminating the voltage difference between the cell's terminals.

The membrane must also permit free passage of the cell's current carriers to permit free flow of current through the cell. The current carriers in the University's redox cell are mainly the positive hydrogen ions from the sulphuric acid.

The membrane must therefore be permeable to the ions which carry the current in the solution, but must prevent diffusion of the active species (that part of the cell which gives up or takes on electrons) in solution which would result in self-discharge of the cell. The choice of membrane is thus crucial to the efficiency of a redox battery.

It should ideally do all those tricks while allowing high coulombic efficiencies to be achieved. (Coulombic efficiency is the ratio of the electric charge



# Now you don't have to be bolted to your vehicle to keep in touch.



The ICOM IC-40 is a compact 40 channel UHF CRS field proven hand held.

It has standard 2 watts output and optional 3 watts output power which is the same as many mobile radios. It is also available with optional 5-tone selective calling.

And is perfect for jobs on the land, water or business where you want to keep in touch with base without keeping in touch with your vehicle.

For all details see your ICOM dealer or call ICOM on Melbourne (03) 529 7582 or (008) 33 8915 from elsewhere in Australia.



Henderson Merrick DiStefano / IC 465

## New battery

which flows out of a battery during discharge, to the electric charge which flows into the battery during charging).

The membrane should also have a low resistivity to minimise losses in voltage efficiency, and good chemical stability for long cycle life.

Although good voltage efficiency has been obtained using a polystyrene sulphonic acid membrane, the resistivity of the membrane's material is still relatively high ( $1.20\text{hm.cm}^2$ ). Therefore, further improvements in the cell's efficiency can be expected with a less resistive membrane.

The product of the voltage efficiency — ratio of the average voltage during discharge to the average voltage during charging — and the coulombic efficiency is a battery's energy efficiency. A low coulombic efficiency means considerable self-discharge or high gassing rates (formation of oxygen and hydrogen).

Overall efficiencies of 80% are said to have been achieved with the vanadium redox cell at the University, which are similar to or higher than the efficiencies of conventional lead-acid or nickel-cadmium cells.

Dr Skyllas-Kazacos decided to try the redox cell concept with the vanadium salts after examining the electrochemical series table, listing electrochemical reactions (the chemical effects of electricity) of various substances. The vanadium salts appeared to her to be capable of satisfying all the requirements for a redox battery. The main reason for choosing vanadium was that it exists in various oxidation states.

The choice of a carbon felt as the material for both electrodes was arrived at after several tests, including charge-discharge experiments conducted by the University's team with various materials.

Skyllas-Kazacos said that after the initial tests proved her concept she and her group felt encouraged to proceed with their experiments. To her knowledge hers is the only group anywhere in the world currently engaged in research on vanadium redox batteries.

The University's researchers see several important advantages of the new type of cell over conventional types.

The solid-state reactions in the conventional-type solid electrodes lead to their degradation, a problem that does not apply to redox cells. In redox cells there are no capacity losses or failures due to shedding or shape change of the

solids immersed in the solutions, because they are passive.

Another advantage of redox batteries is that the amount of charge they can supply during a certain time is determined by the solution concentration and tank volume, whereas in a conventional battery this is determined, as said earlier, by the battery's physical size and the areas of its (solid) electrodes.

It is thus possible to obtain any ampere-hour rating from a redox battery, simply by increasing the size of its storage tanks. Naturally this means that, for the battery to operate continuously, the solutions in the battery have to be drained when they reach discharge level and substituted by solutions from the tanks. The drained solution can then be recharged separately and later reused.

This is probably the greatest advantage of redox batteries over conventional batteries: instead of recharging a redox cell battery it is possible to simply refill its tanks with new amounts of charged electrolyte, the battery thus attaining its full power instantly.

Deterioration of the materials used in a redox battery still takes place, however. Dr Skyllas-Kazacos predicts a service life of 5 to 10 years for a vanadium redox battery, using optimised materials. This compares with a service life of 2-3 years for a lead-acid battery and of about 10 years for a nickel-cadmium battery. The vanadium solutions, however, have an indefinite life.

With an open circuit voltage of 1.5V and an energy density of  $25\text{W.h/kg}$  (watt-hours per kilogram) the vanadium redox cell also compares favorably with lead-acid battery cells with the corresponding figures of 2V and  $15\text{--}30\text{W.h/kg}$ , and with nickel-cadmium cells ( $1.3\text{V}$  and  $10\text{--}35\text{W.h/kg}$ ).

Dr Skyllas-Kazacos said that during the past 10 years the price of vanadium based on fused metallurgical-grade vanadium pentoxide has remained stable at US\$14/kg.

Based on this price she estimated the costs of the chemicals in 1 litre of vanadium salt solution. This would contain 362g of the vanadium salt costing US\$2.10, 188g of 98% solution of  $\text{H}_2\text{SO}_4$  (US\$0.40), and 750g of water (US\$0.05), with a total weight of 1300g and a total cost of US\$2.55.

The total cost of materials for a 1kW battery (excluding the storage tanks) would be about US\$273, with the membrane and the carbon felt electrodes contributing about 40% of that. For a 5kWh system the solutions in the tanks would cost about US\$390.

A typical 1kW vanadium redox bat-



tery would have 17 cells for a total voltage of 24.7V, and approximate size of 30cm x 33cm x 20cm (width x height x length) for a total volume of about 20 litres. The total volume of the vanadium salt solutions in the battery would be 2 x 6 litres. It would have 2 storage tanks, one for each of the two types of solution. For a 5kW.h storage system the total volume of the solutions in the tanks would be 2 x 74 litres.

In the battery's normal use the solutions are continuously circulated within the battery. The solutions are drained through one outlet and replacement solutions are pumped in from the storage tanks, at the same time, through another conduit. This continuous circulation takes place without interrupting the battery's operation.

It is possible to keep the drained solutions in separate tanks, but in the University's concept the drained solutions are taken back to the storage tanks. Thus the solutions in the tanks become gradually weaker, but greater efficiencies of operation have been obtained with this procedure than if the drained solutions were kept in separate tanks.

Of course, if the discharged solutions were kept in separate tanks, instead of being recirculated, the unused solutions in the storage tanks would retain their optimum concentration. However, apart from resulting in lower operating efficiencies, this would necessitate the presence of additional tanks to store the drained solutions.

According to Dr Skyllas-Kazacos only one storage tank would be needed for all positive half-cells and another one for all negative half-cells. However, for reasons of commercial confidentiality, no details are available as to how the researchers propose to avoid shorting the battery's half-cells and "sabotaging" the series connection in such an arrangement.

The redox cell concept had already been demonstrated with 1kW units by NASA in the US and the ETL group in Japan, using an iron/chromium system, i.e. iron compounds and chromium compounds separated by a membrane. However, according to Dr Skyllas-Kazacos, the poor reversibility of the chromium half-cell and cross-contamination of the half-cell solutions by diffusion of the cations across the membrane are still limiting the system's life and efficiency.

She said vanadium redox batteries are likely to find their first use as industrial batteries and in stand-alone, off-grid applications (used as power sources inde-

pendent of the mains supply), where their size is not critical.

The independence between the redox system's power capacity and its storage capacity makes it attractive for long-term storage in remote areas where solar arrays or wind generators have been installed.

An attractive feature of the vanadium redox battery is that it can be fully discharged without suffering any damage and that it is virtually maintenance-free because there is no solution contamination due to cross-mixing.

Skyllas-Kazacos sees electric traction as one of the new battery's most promising applications, because she believes both its power and energy density, which already compare favorably with those of the advanced lead-acid and nickel-cadmium batteries, can be further improved as indicated by recent laboratory tests.

The fact that, instead of recharging, the redox cells can be ready for use again in a few minutes by exchanging the vanadium salt solutions at any specially-equipped refuelling station, is another factor making redox cells an attractive proposition for electric traction.

The solutions would, of course, not be discarded but would be recharged

and later reused. At a refuelling station it would be possible to exchange the solutions, but pay a fee only for recharging the same amount of the solutions and leave immediately as soon as the exchange is completed.

Dr Skyllas-Kazacos came to Australia from Greece at the age of two. She earned a B.Sc degree with 1st class honours from the University of NSW's School of Chemical Engineering and Industrial Chemistry and a Ph.D. degree in 1979 from the same School. Her research team at the University of NSW includes Dr Miron Rychcik, originally from Poland, and professional officer Franz Grossmith.


She is very excited by the interest industry has shown in her invention. Unisearch, the University's R&D company, has negotiated a worldwide licence agreement with Agnew Clough Ltd to develop and market the invention.

The company told the University it is committed to seeing the battery commercialised, and will operate the battery's first full-scale test unit in the company's mines in Western Australia in about 12 months.

The University's research project has been supported by the National Energy Research Development and Demonstration Programme.

EA

# ONLY YOUR EARS VIBRATE

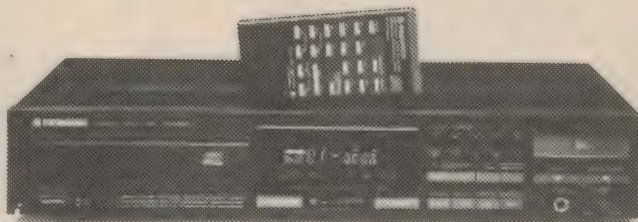

The PD-6050 C.D. features the new Pioneer disc stabilizer, a no-contact magnetic clamber which eliminates vibrations to the disc and confines them to the only place they do improve sound quality, your ears. Naturally this unit carries all the advanced Pioneer features, including infra red remote control and timer start.

For a brochure and the name of your nearest dealer, phone 008 33 8439. In Melbourne phone 580 9911.

**PIONEER**

PIO 0596



## HIFI REVIEW:

# Pioneer's PD-6050 compact disc player

Representative of the latest generation of middle-range CD players, the new Pioneer PD-6050 offers features previously only found on more expensive models. This has been achieved largely by refinements in production technology.

When the first cars appeared, each one was lovingly made by master craftsmen using only the finest materials. They were solid, reliable and *expensive*. Then a little while later, along came Henry Ford who showed that by taking advantage of mass production technology, you could crank out cars that would do almost the same job, but could be sold for a fraction of the price.

Much the same kind of thing now seems to be happening with CD players. The first pioneering players to appear had solidly made metal player mechanisms, using either castings or heavy-gauge pressings, and mounted in equally solid pressed cases. At the time, this seemed to be necessary in order to achieve the rigidity and stability required for maintaining focus and tracking of the laser beam, for reading those tiny pits. And needless to say, the cost

of the early players reflected this necessarily conservative approach.

But over the last couple of years a lot of experience and knowledge has been gained, both in terms of the electronics used in CD technology, and in the production techniques and materials used in their manufacture. By applying all of this new experience in an integrated fashion, it is now possible to produce players which provide virtually the same performance as the original models, or better, but using much lower cost components and manufacturing techniques. As a result, we consumers are "reaping the benefits" in terms of a steady drop in player cost/benefit ratio.

The new Pioneer PD-6050 is a good case in point. It offers full random play programming, a full function wireless remote control, direct track-select keys, a multi-function fluorescent display,

two-speed manual track search, high performance digital filtering and a built-in stereo headphone amplifier. Until very recently these features would have cost the best part of \$1000, but the PD-6050 sells for an RRP of only \$599.00.


How has it been done? Well for a start, a high proportion of the player mechanism is now made from moulded resin-loaded plastic materials. Pioneer says that the parts of the new mechanism have all been developed using computer simulation techniques, to provide the same rigidity and dimensional stability as the aluminium castings formerly used. The moulding materials used have made possible mounting configurations that in fact would not have been possible with aluminium, allowing reduced use of adhesives. As a result, Pioneer claims that the mechanism should actually be more reliable than the metal version it replaces — while at the same time being significantly cheaper.

An interesting feature of the new design is an enlarged disc stabiliser. This is the boss which is lowered onto the CD when the carrier drawer is closed, to



*Thanks to refinements in CD player manufacturing technology, the PD-6050 offers features previously found only on models costing considerably more.*



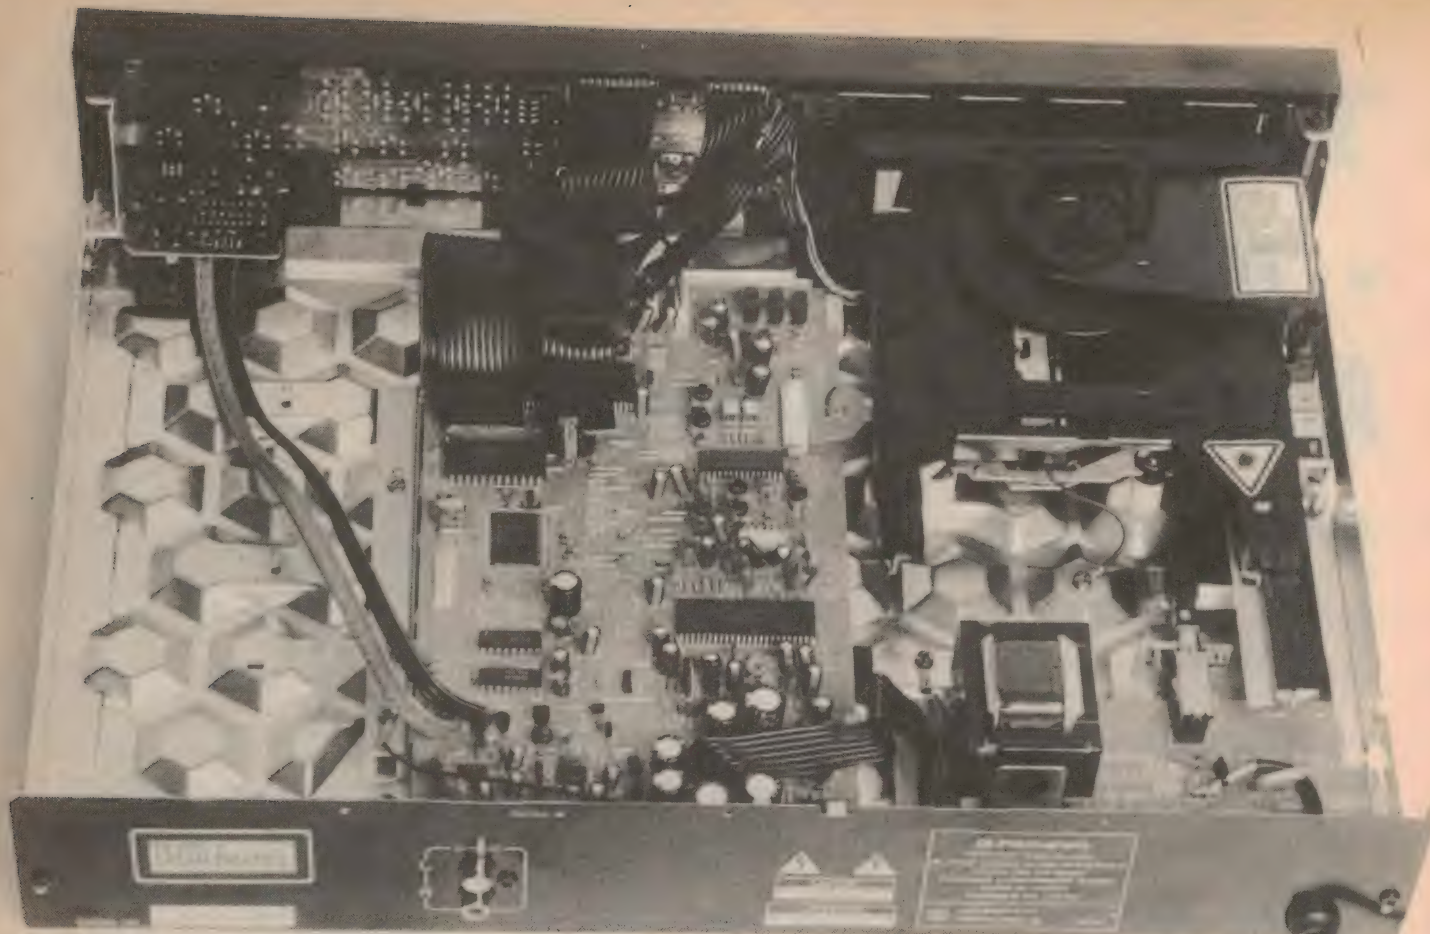

**A peek inside shows the "honeycomb" pattern pressed into the bottom of the case for stiffening, and also the redesigned player mechanism with its high proportion of plastic components.**

press it against the drive spindle hub. Some of the earlier CD players had relatively small bosses, and apparently this could allow the discs to flex as they rotated — causing focus and tracking problems. It was for this reason that some aficionados started cementing "damper" discs to the top of their CDs, to stiffen them and dampen any flexing or vibration.

In this new mechanism Pioneer has increased the stabiliser diameter to about 80mm diameter, which should provide adequate damping and stiffening as it corresponds to more than half of the CD's own diameter. Certainly in our tests, of the PD-6050, we could detect no sign of vibration problems.

Pioneer also claims to have incorporated a novel system to ensure that the stabiliser is accurately centred. This uses an arrangement of four ball bearings, in a one-sitting-on-three configuration. As far as I can determine, the assembly is in the spindle hub, and the single top ball mates with a small hole in the centre of the stabiliser. Whatever, the stabiliser does seem to run very truly.

Other features of the new player

mechanism include a smaller laser diode, nearly half the size of previous units, and a simpler optical system which uses no separate collimator lens and no cylindrical lens for the focus sensing. Instead, the focus servo makes use of the inevitable astigmatism of the main half-mirror, which is not corrected but carefully controlled. A very neat and efficient solution!

But perhaps the most obvious economy of all, when you peek inside the PD-6050 case, is the use of a pressed "honeycomb" pattern to stiffen the main case itself. This has allowed the case to be pressed from much lighter metal than the earlier units, no doubt achieving a worthwhile saving. Although the case seems fairly flimsy when the top is removed, it stiffens up somewhat when fully assembled. In any case the player mechanism, which is the crucial part, seems well isolated from any flexing.

Needless to say the player electronics takes full advantage of the latest technology, as well. All PCBs are single sided, and appear to have been assembled by automation. The decoder uses

the Sony CXD1135Q chip, which includes built-in digital filtering. A single D-A converter is used, sampling each channel at 44.1kHz.

Our testing of the PD-6050 was not particularly rigorous, but consisted of trying it out on some of the more demanding tracks of the Denon test disc, plus extended listening with a variety of very familiar and often-played music discs. It came through without a murmur, showing that Pioneer has been very successful in its efforts to prune price without sacrificing performance.

About the only criticisms I can anticipate from "golden eared" types are the use of a single D/A converter, and the lack of volume control via the remote control. I have to admit that neither of these seems to me particularly important; for example I've never been convinced that anyone can actually hear the phase errors caused by the 11.34us multiplexing delay. I certainly can't. But perhaps Pioneer might consider further refinements along these lines for next year's model.

For the present, the PD-6050 seems excellent value for money. (J.R.)



# The Smart Book - an Australian breakthrough

*Axemen, spare those trees! The age of the electronic book is dawning, and an important breakthrough has just been made right here in Australia . . .*

by STEWART FIST

It is not often that Australia can claim a "first" in the area of high-tech consumer products. In fact, I can't think of one since the Hills Hoist! But a small text-based portable computer specially designed to substitute for reference books, could well take the world by storm.

"The World's First Electronic Book" is how Megaword, its developer, is promoting it. It is an Intel 8088-based text-processing computer about the size and weight of a reasonable hardback book, and with the total front surface a green liquid crystal display (LCD) screen. You plug in a text module about the size of a credit card (but a bit thicker) and you have the full text of a major reference book in machine searchable form.

The idea is called "Smart Book" and it has the backing of the publisher Weldon's (who brought you the Macquarie Dictionary) and the James Hardie Group. The two have jointly formed a new company called Megaword, and are about to launch this technology on the world publishing scene.

I've only had a chance to play briefly with a prototype, and it works well. There were three on show at a recent press launch, all larger than the final product which was also shown in mock-up form. So the following details apply more to how the final product will look, when it goes on sale later this year.

For instance, the mock-ups had horizontal format screens with double text columns, but the final products will be book-shaped with a vertical screen format. The character generator inside the Smart Book can handle up to ten differ-

ent fonts, and so chapter headings, etc. can be displayed in large font sizes. This immediately gives you the feel of using a Videotex screen, although the system doesn't yet allow for graphics.

Across the bottom of the screen are six buttons which correspond roughly to the keys on your cassette tape recorder, or perhaps more correctly to the entry and cursor control keys on your home computer. Basically they let you go forward, backwards, up and down through your text, and to select and play information.

There's a bit more to them than this, because they are soft-keys, and in certain circumstances they are redefined by the program to perform other functions. For instance you can use them to select letters of the alphabet to build a word for key-word searching. The screen displays the alphabet in groups of five, and you go up, down, and across until you find the letter, then select it. The lack of alpha keys makes keyword entry a bit laborious, but it is acceptable.

The idea behind the design is to make the machine less formidable to computer illiterates. Megaword is planning to introduce a plug-in keyboard as an optional extra, and I would predict that this will be essential if you plan to use the Smart Book for dictionaries and reference material. Since Weldon owns both the Macquarie Dictionary and the Thesaurus, I would say that this was a certainty.

The unit is battery powered, using four AA-size rechargeable cells which will give about four hours of reading time. This is probably enough, since you'll probably use it most of the time

with a mains pack which can simultaneously recharge the cells. The power drain is relatively high because of the back-lighting of the LCD screen — and yet this is necessary for clarity in these type of screens.

The software for this "electronic book" comes in the form of a plug-in module which at present is about the size of an audio cassette, but which will eventually be reduced to thick credit card size. It is actually a vastly expanded Smart-Card, filled to the brim with electronic components — mainly mask programmable ROM or EPROM chips.

The ROM cards hold about 1 megabyte of data at present, but this will soon improve; two or three megabytes will be commonplace within a few years. With CD-ROM and high-density magnetic storage, we tend to get blasé about the odd megabyte or two of memory, but the present prototype ROM modules are holding the complete text of the Bible, together with the retrieval software and indexing required for key-word searching and for constructing a Concordance.

This is probably all you really want in one unit. CD-ROM with its 400 to 600 average-sized books on each disk is actually a bit of overkill. A box full of credit cards, each with one reference book, is probably just as convenient — especially if the whole unit is portable, which CD-ROM is not (as yet, at least).

The prototype software module on show had the full text of the Bible. There are a number of different versions of the Bible, but the average text length is about 800,000 words, or 3.5 million characters, according to the Bible Society.

This makes for a minimum requirement of, say, 4 Megabytes (I don't think they've counted spaces as characters), plus an overhead for indexing key words and for the retrieval software. It is hard to see how you could get away



with an uncompressed length of less than about 5Mb.

Megaword has compressed this down to 956 kilobytes on the prototype card, which means that they are achieving better than 5 to 1 in their text compression ratio. They say that the trick is in using special redundancy compression techniques, developed by Roger Purcell of Techway. These work on a "word" basis, rather than on "characters", Purcell says.

He claims to be able to reduce a text file size by a factor of five (worst case) and seven (best case). Good text compression is usually taken to be ratios of about three to one — so Purcell's achievements are quite remarkable. He won't talk about them — which makes the search for an explanation even more interesting.

There are three compression techniques in common use today, and two of these, Run-length and Huffman coding are both character-based. Purcell says that they don't use these techniques, nor do they use the standard word-based compression system known as Zev-Lemple coding.

Zev-Lemple coding handles commonly used words, prefixes and suffixes (such as "and", "of", "pre", "ing", etc.) as single 10-bit "tokens". It also has the ability to point back to a previous occurrence of a word — and since a large number words are used repetitively in any writing, the combination of these two processes greatly reduces the character storage needed.

Probably the best compression you could expect with Run-length, Huffman and Zev-Lemple coding techniques being applied simultaneously is about 3.5 to 1. They work much better with database material, of course, where the main problem is "air" — blanks in unfilled fields.

Purcell's system must be compressing at nearly twice the usual rate, and so it is a considerable achievement. He says that it is a slow process and it needs a MicroVAX or other minicomputer at the minimum, although it may be possible to rewrite the algorithms for a PC application at a later time. The VAX requirement seems to indicate that there are multiple layers of algorithms — that he is compressing, then recompressing — but he says no.

The people at Megaword are all very cagey when telling you anything about the technical side of the Smart Book. They are afraid that they will be "guzzumped" by the Taiwanese or the Koreans, before they can get their product



**The prototype Smart Book, with a plug-in module for the Bible being inserted.**

into distribution — and they are probably wise to be suspicious.

They reluctantly revealed that the electronic book is based around the Intel 8088 processor, which makes it a cousin of the IBM PC — but that's all. They say that they have patents on the ROM-pack, the "box" and the interconnection techniques, but it is hard to see what is legally protectable apart from the compression algorithms and the text-pack standards.

People have made computers with LCD screens before, and computers with plug-in ROM games modules. Megaword seem to have done little more than take these old ideas to their logical extremes and concentrate on text only.

I don't say this to put down their achievement — but rather to place it in perspective. Smart Book seems to me to be the result of clever design work, rather than any true inventive processes.

The plug-in text modules are the key to the whole system of course, the rest is just a well packaged computer with a large screen. Eventually these modules will be mask programmable ROMs, which means that the information is inserted into the chips by a technique roughly analogous to the way patterns are silk-screened onto tea-towels — only in this case it is added in the micro-lithography phase of chip production. However they will need long production runs to justify the initial creation expense of the mask.

Megaword also intends to produce Electrically Erasable Programmable ROM (EEPROM) versions, so that data can be added to the module as required. The designers are thinking in terms of vending machines which would

probably take the information already compressed from a CD-ROM and inject it into the module. This might also be the best way to handle stock in a retail outlet. The serious problem with book-stores is the huge amount of stock they need to keep on hand, so this could be a way of cutting these overhead costs.

It is hard to know how fixed the logical functions of the system are. The promoters talk about having voice recognition and voice synthesis modules at a later time, and also about the possibilities of linking the Smart Book to a keyboard, printer and other personal computer, but whether this was pie-in-the-sky hopes, or definite plans, is difficult to say. It does seem to indicate that beneath the screen you've got a full-functioning portable computer, however.

However, when I asked whether the de-compression algorithms were hard-wired into the system, or whether they could be switched out at will, no one was able to give me a firm answer. This seems to indicate that at least some parts of the logic is hard-wired into the system — more like a dedicated word-processor, rather than a personal computer — and this is an important consideration.

The Smart Book could well find a use by tradesmen and businessmen as a reference source, not only for fixed encyclopaedia-type data, but also for material extracted from on-line services and from their own business records kept on PCs. If all this data needs to be sent to Megaword for compression before it can be used, this market will evaporate: it must be possible to transfer data to the Smart Book by anyone at a moment's notice.

At the press launch the company ex-



ecutives were rabbiting on (as executives are wont to do) about Smart Book eventually being a replacement for all paper-based books with electronic versions of everything from Mills and Boon bodice-rippers, to Swahili copies of the Bible. I doubt it!

The use of ROM-type modules to store the data means that there is a high intrinsic cost associated with each "book" — quite apart from the text entry and royalty costs. You don't have these module costs to the same degree with other mass storage mediums.

It is hard to see how the production of a mask programmable ROM module could ever be less than an ex-factory price of say, \$10, which translates to \$40 or \$50 retail. There is no escaping the need to accurately etch a million logic circuits, then to add the masked information, and finally to check the device — each one on an individual basis.

By comparison CD-ROM disks have an ex-factory price of about \$4 each — and these contain roughly 600 times the amount of information. It is often quoted that a CD-ROM disk will hold between 400 and 600 standard-sized books — but these are *uncompressed* books: you could multiply by five if Purcell's algorithms were being used.

The Drexler card is the obvious alternative technology to ROM-modules if you want cheap portable mass storage. Drexler is a laser-optical card system which uses essentially similar techniques to CD-ROM, and current Drexler cards on the market hold 4 megabytes of data. Experimental Drexler Cards have managed to cram over a hundred megabytes onto one card.

The cards are made by impressing the "pits" and "lands" into plastic sheet, and then coating these with a molecular layer of aluminium followed by a clear protective surface. The cards themselves have no electronic components, so they are very cheap to produce in quantity.

Against the use of Drexler, however, is the fact that you would then need to have some form of mechanical system in the reader — even though it is only a laser-scanning device. The Smart Book has the advantage of having no mechanical systems whatsoever — a great plus for any portable device.

So it is hard to come to any firm conclusions on Smart Book. My guess is that it will find a place initially on the desks (and in the briefcases) of business men and women, as a handy portable reference — but that depends, to a degree on how easy it is for them to add

their own information.

It might also find a use with the partially sighted, because of the large print option, and also with special groups like accountants and lawyers who might find it easy to distribute changeable information in electronic form.


But it is hard to see how Smart Book can break out into the wider community. Like all of these inventions, there is a chicken and egg problem in the mass-consumer markets — few people are going to outlay, say, \$500 on a machine until hundreds of books are available, and a wide range of books won't be available until the machines are in wide use.

Add to this the problem that the software won't be cheap until large numbers of the modules are made by the mask method; the threat from alternative technologies like Drexler; and the likely problems the company is likely to face in protecting its design by patents, and you can see that life for Megaword is not going to be easy.

But they deserve to succeed. They've got the backing of a large industrial group, they have publishing and marketing expertise, and Smart Book is an excellent piece of design. It's also a market first- and I wish them well. **EA**

## GW THE ALTERNATIVE 20 MHz OSCILLOSCOPE


While other 20MHz CRO's are content to be like the rest, GW offers you the real alternative. The GOS-522 is a 2 Channel, CRO with a unique 'ALTERNATE TRIGGERING' mode between Channels 1 and 2. This allows you to compare test points between good and bad boards simultaneously!

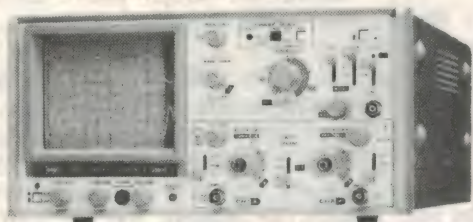


### GW Instrument's GOS-522 offers more 'real' facilities for your dollar:

- Fast 20ns/DIV sweep speed — for high precision
- Large 6 inch rectangular, internal graticule CRT
- Trigger Level Lock and Variable Hold-off — for operating ease
- DC Trigger Coupling — for low frequency signals
- AUTO NORMAL and SINGLE SHOT sweep modes


### GW's "ALTERNATE TRIGGERING" MODE:



CH1 selected as trigger signal.



CH2 selected as trigger signal.



Alternate Trigger Mode selected: Both traces stably displayed.

WITH PROBES:

\$745 excl. tax

\$869 incl. tax

WITHOUT PROBES:

\$710 excl. tax

\$829 incl. tax


Prices Valid for old stock only.



**EMONA INSTRUMENTS**

OUR NEW ADDRESS

86 Parramatta Road  
Camperdown 2050  
Phone: (02) 519 3933



### ALSO AVAILABLE FROM:

NSW David Reid Electronics  
Geoff Wood Electronics  
QLD Ballec Systems Pty Ltd Brisbane  
Nortek Townsville  
VIC Radio Parts Group Melbourne

TAS George Harvey Electronics Hobart  
George Harvey Electronics Launceston  
WA Hanco Engineering Pty Ltd Perth  
SA Int'l Communication Systems Pty Ltd Port Adelaide



# 240 VOLT INVERTER SENSATION !

NOW YOU CAN HAVE MAINS  
POWER FROM ANY 12V OR 24V  
BATTERY ANYWHERE — ANYTIME ...

## **NEW** HIGH POWER DESIGN

Conservatively rated at

- 500 watt continuous use
- 800 watt intermittent use

- Bulletproof construction protected against AC overload / DC overload / Reverse Polarity Thermal Overload / Low Battery Voltage
- Solid steel case and aluminium heatsink base
- Autostart facility for convenience
- Led 'status' indicators
- 12V and 24V models available
- Fully portable (weighs 9kg)



Incredible Value

At **\$575** incl. Tax

(OR \$499 EXEMPT)

PROUDLY DESIGNED AND MANUFACTURED IN AUSTRALIA

Full 12 Month Warranty — 14 Day No Fuss Money Back Guarantee



## A FEW WORDS ON QUALITY ...

Austronics Inverters are built up to a standard not down to a price. That's why we use 'Industrial Grade' components like Email Westinghouse circuit breakers, C & K switches, AMI transformers — in short, there's no compromise. The solid steel chassis is as rugged as is over 200 amps of output device ... What more can I say ? Invest in a unit today and you'll be as proud of your IC500 as I am !

Steve Wroblewski — Director



**austronics**

762a Beaufort Street  
Mount Lawley, W.A. 6050  
**(09) 370 1050**

CHECK THE LIST BELOW FOR YOUR NEAREST AUSTRONICS DEALER OR  
RING US DIRECT WITH YOUR BANKCARD/VISA/MASTERCARD DETAILS  
AND WE'LL DELIVER — ABSOLUTELY FREE — ANYWHERE IN AUSTRALIA !

### WESTERN AUSTRALIA

#### PERTH

CITY:  
Bill's Electro Services 328 5366

#### SUBURBAN:

- MOUNT LAWLEY Austronics 370 1050
- EAST PERTH Computronics 221 2121
- FREMANTLE Electronic Systems 335 7313
- BALCATTA Solar Plus 344 7577

#### COUNTRY:

- ALBANY Southseas Marine 412 806
- BROOME Phil Sproull Electronics 921 418
- BULLSBROOK Bullsbrook Electronics 571 1148
- ESPERANCE South East Electronics 713 597
- GERALDTON K.B. Electronics 212 176
- GINGIN W.A. Solar Supplies 554 036
- KALGOORLIE Today's Electronics 215 212
- KUNUNURRA Kimberley Electronics 682 133
- MANDURAH Lance Rock Retraction 535 1246
- SOUTH HEDLAND Video Head Specialists 723 052

### NORTHERN TERRITORY

#### DARWIN

Nortronics 811 164

### SOUTH AUSTRALIA

#### ADELAIDE

CITY:  
• Force Electronics 212 5505

#### SUBURBAN:

- BRIGHTON Force Electronics 296 3531
- CHRISTIES BEACH Force Electronics 382 3366
- ENFIELD Force Electronics 349 6340
- FINDON Force Electronics 347 1188

### VICTORIA

#### MELBOURNE

CITY:  
Active Electronics 602 3499

#### SUBURBAN:

- CARNEGIE Just Communications 578 6247
- CHELTENHAM Ultrasolar 584 7876
- CROYDEN Truscott's Electronics 723 3860
- MITCHAM Just Communications 873 3710
- SURREY HILLS Solaroo 830 4511

#### COUNTRY:

- BENDIGO K.C. Johnson Electronics 411 411
- COBRAM Berg Auto & Electrical 722 212
- HASTINGS Westhaven Communication 790 411
- ROSEBUD Pentronics 867 688
- SALE Heyfield Electrical 480 292
- SHEPPARTON Just Communications 222 207

### QUEENSLAND

#### BRISBANE

CITY:  
• Santech 252 4909

#### SUBURBAN:

- WOODRIDGE David Hall Electronics 808 2777

#### COUNTRY:

- BOONAH Fanway Enterprises 868 169
- CAIRNS Electronic World 518 555
- CAIRNS Solar Installations 513 420
- GLADSTONE Gladstone Electronics Services 724 321
- INGHAM Mark's Electronic Shop 761 992
- MT ISA Outback Electronics 433 331
- PALM BEACH Electronic Centre 341 248
- TOOWOOMBA Hunt's Electronics 329 677
- TOWNSVILLE Solex 722 015

• DENOTES AN AUTHORIZED AUSTRONICS SERVICE OUTLET

### NEW SOUTH WALES

#### SYDNEY

CITY:  
City Sailing Centre 267 6508

#### SUBURBAN:

- AUSTRAL Windpower Australia 606 0033
- CARINGBAH HiCom Unitronics 524 7878
- KOGARAH Caravan Accessories 588 3400

#### COUNTRY:

- BROKEN HILL Hobbies and Electronics 884 098
- DENILIQUIN Deni Electronics 813 672
- GOSFORD Tomorrow's Electronics 247 246
- INVERILL Lyn Willing Electronics 221 821
- LEETON Leeton Record Centre 532 081
- LIGHTNING RIDGE Barry Barnes 290 579
- LISMORE Decro Electronics 214 137
- MURWILLUMBAH Santech 724 664
- PAMBULA Combined Energy (0649) 569 22
- QUIRINDI Beecom Communications 462 344
- WINDSOR M & E Communications 775 935
- WOLLONGONG S.R. Pogson 299 022
- YOUNG Keith Dongess Electronics 821 279

### TASMANIA

#### HOBART

CITY:  
• D&I Electronics 348 244

#### COUNTRY:

- BURNIE V.K. Electronics 317 733
- DEVONPORT A.I. Electronics 248 322
- LAUNCESTON Will's Electronics 315 688

### CANBERRA

#### CITY:

- Solar Industries 542 160

DEALERS WANTED IN ALL AREAS — RING ROGER BREEDEN (09) 370 1050 FOR DETAILS



# New camera uses floppy disks, not film

World famous Japanese camera maker Canon has just released a radically new model. Instead of conventional film, this one uses electronics: a compact high resolution CCD image sensor coupled to an inbuilt recorder using tiny 2" floppy disks.

by JIM ROWE

I wonder what people thought when they saw the first demonstration of Henry Ford's first spluttering model T, or Tom Edison's first scratchy phonograph. Did they realise instantly that they were seeing history made, and that the gadgets in front of them were portents of whole new technologies and industries?

These thoughts crossed my mind because I suspect I've just seen a portent of the future direction of photography. It's the new Canon "Still Video Camera", or more accurately a complete new still video photography system based on the SVC. And it's very impressive — not just for its current capabilities, but even more importantly because of its future potential.

At the heart of the system is the new Canon RC-701 camera, which looks like

a slightly larger than normal 35mm single lens reflex. It has interchangeable lenses like a typical SLR, a flip-up reflex mirror, a focal-plane shutter and through the lens exposure metering. Like many modern cameras it has a fancy LCD display showing the shutter speed, exposure setting and other parameters. There's even a built-in date/time encoding system, which can "date stamp" each shot.

But instead of the usual swing-out back for film loading, the RC-701 has a small flip-open door about 2" square. And instead of film it records on tiny floppy disks, which look like a bonsai version of the 3-1/2" microfloppies used in many of the latest PCs. All you do is pop in the disk, shut the door and it's ready to go — a little like one of those little disk film cameras to use, but

otherwise very different.

At the heart of the camera is a 2/3" CCD (charge-coupled device) electronic image sensor, similar to that used in the latest video camcorders but with higher resolution. It boasts 780-line resolution in the horizontal direction and 490 in the vertical direction, and uses an advanced colour stripe filter for precise colour registration and purity.


Like most of the modern video cameras it features automatic colour balance, to give accurate colour rendition in almost any lighting. However like all of its other "auto" functions, this can be overridden manually for creative effects. For the RC-701 is really intended for the professional photographer, not the amateur. As well as three new lenses specifically designed for it, it will also accept over 60 existing Canon "FD" professional lenses using an adaptor.

The camera provides 9 shutter speeds, from 1/8th to 1/2000th of a second. The RC-701's focal plane shutter doesn't use the traditional horizontal or vertical blinds, but uses a new rotating slit and "magnetic charge" system. Canon hasn't released details of this, but it sounds like a technique of dumping a charge from a capacitor into a driver solenoid. It's certainly very quiet.

Like other cameras intended primarily for professionals, it offers various shooting speeds. In this case there are four: single shot, two per second, five per second and a very impressive 10 per second. How's that for capturing the action! Any faster and it would be a movie camera . . .

I suspect that the main thing limiting the shooting speed is the ability of the floppy disk drive to step between tracks, because each image is recorded on its own track. Each floppy disk will record up to 50 images, each accompanied by its own date and time stamp information. The floppy drive is very quiet, even when you're taking shots at 10 per second.

Incidentally the images are recorded on the disk in analog fashion, using an FM system very similar to that in conventional VCRs. Each still picture occupies a single video field, encoded in the NTSC system used for American and

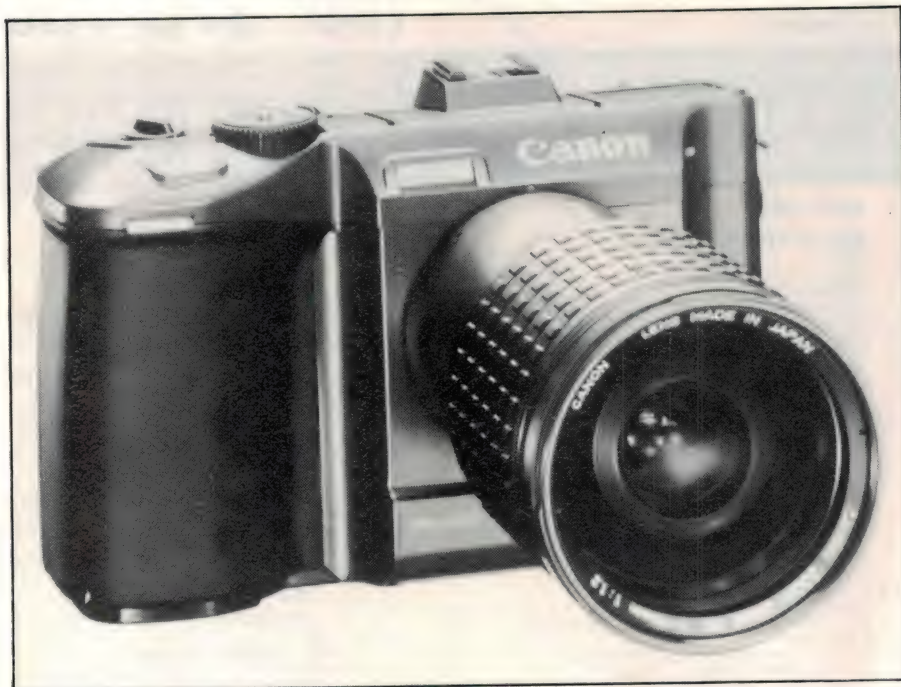

Canon's new still video camera is a little larger than a 35mm SLR, and uses 2" microfloppy magnetic disks instead of film.



Japanese colour TV.

Power to run the RC-701's electronics comes from a rechargeable NiCad battery pack, which fits inside the handgrip "bulge" on the right-hand side of the case. The NiCad pack delivers 8.4V and will power the camera for between 200 and 250 shots when fully charged. According to Canon it can be recharged in an hour.

With battery pack and 11-66mm zoom lens, the camera weighs a fairly solid 4.18 pounds (1.9kg). Not exactly light compared with a typical SLR, but acceptable.

So much for the SVC camera itself — but what do you use to view the pictures? Actually there are a number of options.

One is a small "Still Video Recorder" or SVR, the RR-551, which looks like a smaller than usual VCR or CD player. Using this you can take the floppy disk from the camera, and play it back. The pictures can be viewed on a standard NTSC-system colour monitor or TV receiver.

The RR-551 offers front loading like a VCR, and features the ability to random access any desired shot on the disk simply by keying in its track number (like finding the tracks on a CD). Virtually all of its functions can be controlled using a cordless remote control unit. As well as being used to replay disks recorded by the SVC camera, the recorder can also be used to record "freeze-frame" shots from NTSC video recordings and TV transmissions — which may well interest TV stations and newspapers.

If you want "hard copy" versions of the SVC shots on paper, rather than viewing them on a monitor screen, Canon offers the RP-601 colour printer. This is a full-colour video graphics printer, which uses ink jet technology to produce pictures with an active area of either 122 x 92mm or 90 x 68mm. Printing a shot of the larger format takes around 4-1/2 minutes, and one of the smaller format 3 minutes.

The printer uses four inks, as in traditional four colour printing: yellow, cyan, magenta and black. Dot density is 6.7 per millimetre in both directions, or 170 per inch. Not bad at all, for half-tone reproduction!

Paper feed is automatic, as is print colour and density control. A single load of paper provides sufficient for 50 prints.

A couple of sample larger-format shots produced by the RP-601 printer are reproduced here actual size, to give an indication of the quality obtainable



**Above: The transceiver used to send the new still video pics over the telephone network. Below: Sample pics, shown actual size.**







# Were you ever halfway through a soldering job and needed more heat? Then Scope gives you two choices.

One is the 'Miniscope' — a slim 70W pencil iron, shown in picture above, with real power — for light to medium work.

The second is the 'Superscope' with up to 100W of soldering power for medium to heavy terminations.



Superscope

**An iron that goes cold on the job can do more harm than one that is too hot.**

*JENES first law of soldering says 'If your iron goes cold — the components get too hot'*

The sure way to 'cook-' or overheat a component and lift the PCB pad is to solder with an underpowered iron which eventually takes so long to melt the solder that you cook the job first.

Superscope/Miniscope helps you prevent this because it lets you apply a surge of instant

heat to suit the job so that a joint is completed in less than 3 seconds.

Speed is vital to prevent heat soaking into and lifting the PCB tracks, conducting along the component pig tail and burning that component.

If you use an iron for repairs where the size of each soldering joint can vary from light to heavy, you need an iron with extra heating power at your finger tip —

**You need Scope.**

## WANT MORE INFORMATION THEN CONTACT


VICTORIA: (03) 338 1566 NEW SOUTH WALES: (02) 546 6144  
QUEENSLAND: BRISBANE: (07) 52 5231 TOWNSVILLE: (077) 79 3855  
SOUTH AUSTRALIA: (08) 352 1166 WESTERN AUSTRALIA: (09) 362 5011  
TASMANIA: LAUNCESTON: (003) 31 5545 HOBART: (002) 34 2811

FOR A FREE CATALOGUE  
SEND YOUR NAME AND ADDRESS TO:  
FREEPOST No. 2  
SCOPE LABORATORIES  
P.O. BOX 63, NIDDRIE, VICTORIA, 3042  
No Stamp Required


**S**  
**SCOPE**  
(03) 338 1566  
TLX: AA38318



## Canon's video photography . . .

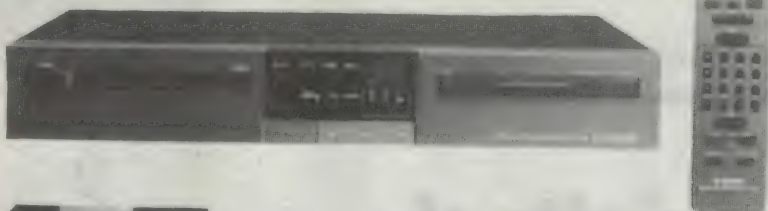

*Above: The RR-551 still video recorder and remote control. Left: One of the tiny 2" floppy disks. Below: the RP-601 video printer, which produces full-colour prints like those reproduced on the previous page in about 4-1/2 minutes.*

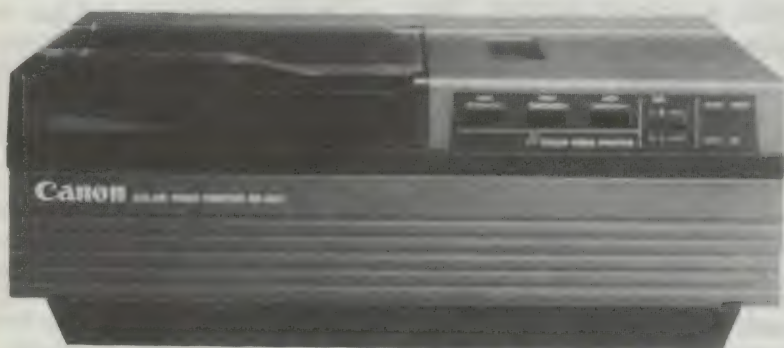

at present. It seems to be roughly on a par with 16mm format.

There's a third option available with the Canon still video system: a transceiver, which can transmit the pictures to a similar transceiver anywhere in the world via a normal phone line.

The RT-971 transceiver contains a built-in still video recorder, and also a colour monitor with 94-mm diagonal screen. It uses AM transmission for low-noise phone circuits, or FM for noisy lines. A colour picture takes about 3 minutes to transmit, while a monochrome version takes only 1-1/2 minutes.

The transceiver will also send and receive captions and text from a standard computer, and has an interface for a Centronics printer. It can be used with a cellular radio phone for portable and mobile applications, when powered via an inverter.

By the way, the reproduced picture showing some pieces of fruit was actually transmitted from Japan over the phone lines, using a pair of RT-971 transceivers. I couldn't detect any degradation on this shot, compared with those shot "live" during the Canon demo.

There's also a small basic CCD colour camera module, the Ci-10, designed to

hook up directly to the RR-551 recorder or RT-971 transceiver.

So overall, the new Canon still video system is very versatile. It's very convenient to use, and should have quite a few applications even as it stands. Security and law enforcement organisations will probably find it very interesting, and large real estate firms and international news gathering organisations should do too.

But price is likely to prevent the system from percolating down into the consumer marketplace, at least for a while yet. The indicated price for the RC-701 camera is \$5800, and that for the RR-551 recorder \$4000. The RP-601 is similarly \$11,000 and the RT-971 transceiver a somewhat breathtaking \$30,000.

Just at present, the cost/performance ratio of the new system isn't likely to have the film companies losing much sleep. But looking further down the track, I suspect it has a big future once it gets the benefit of emerging ULSI and HDTV technologies. Then we may well see consumer level products.

At the Canon demo, I had the distinct feeling that I was seeing the "model T" of a new era in photography. Only time will tell.

## OUR OWN TIME MACHINE!



It may look like a book, but don't let its appearance fool you. There are no whirling dials and control levers; but once you open the cover, it'll take you on an incredible journey backwards in time. You'll find yourself back in the 1920's, when Australia's first new radio stations were just getting established and a typical radio set cost ten weeks' wages. We've chosen a collection of highlights from the 1927 issues of "Wireless Weekly": You'll find some front covers, a few editorials, the best new items, a collection of typical do-it-yourself radio set designs, and some selected pages from the programme listing. Plus a sprinkling of the original advertisements, of course. These are particularly fascinating because they show prices and put everything into proper context. Send today for **The Best of Wireless Weekly in 1927 . . .** A fascinating and nostalgic trip into our radio past.

**Send your order to:**  
**Freepost No.4**  
**Federal Publishing**  
**Book Sales,**  
**P.O. Box 227,**  
**Waterloo NSW 2017**

(no stamp required if posted within Australia)

Price: \$3.95 plus \$1.00p&p





## TV colour revisited

Facing this November issue, we find ourselves with a number of letters, arising from earlier discussion, which we have simply not been able to accommodate in recent issues. Two of them have to do with the instalment for May under the heading "Television colour — hue are all wrong".

As you may recall, a correspondent (B.D. of Winnellie, NT) had criticised two of our writers in the January issue for describing red, green and blue — the basis of colour television — as "primary colours". He maintained that red, yellow and blue were true primaries and professed to be at a loss to understand how the system could operate without yellow as a primary, or be able to synthesise that colour in its absence.

Hence the whimsical title, under which his letter appeared: "Hue are all wrong"!

Very obviously, B.D. had not grasped the distinction between the "light-source" primaries used for television (green, red and blue) and what we described as the "pigment" primaries (yellow, magenta and cyan) commonly used by artists. Being a frequent source of puzzlement, it was this aspect on which our reply tended to concentrate.

We explained that there were two basic systems of colour mixing; or, if you prefer, two basic physical means by which colours can merge to produce a wide range of intermediate hues and chroma levels:

- **ADDITIVE**, applicable to the mixing of coloured light sources — in this case colour television, which normally involves luminescent phosphor dots or lines. Additive mixing uses green, red and blue as the primaries and these are, in fact, considered by physicists to be the true or basic primaries.
- **SUBTRACTIVE**, applicable to colour mixing involving light reflected from various pigments, inks and dyes. For this purpose, yellow, magenta (not red) and cyan (not blue) are most appropriate, being most commonly de-

scribed in physics and other literature as "complementary colours" or the "complementary primaries".

Against this background, we invited B.D. to rethink his ideas and added a few more observations which we hoped he would find helpful in so doing.

Towards the end of the article, we indulged in a little deliberate "stirring" by raising the question of how colour photographic systems cope with the need to record a whole range of brilliant yellowish hues from a TV screen which, when examined with a magnifying glass, appears to be totally devoid of that colour, as such.

At the time, we were rather expecting that Phil Watson, a former colleague and a photographic guru, would come up with a definitive article on the subject and we hesitated, for that reason, to debate other follow-up correspondence in isolation. Things didn't work out that way, however, although Phil did, for his own satisfaction, check out the basic technicalities, as well as looking back over available historical references.

Without trying to translate our rather lengthy phone conversation into an article, it is sufficient to confirm here that, photographically, green/red/blue have always been accepted as the true primaries, but with complementaries yellow/magenta/cyan also having an essential role in the processes.

### Coming to the letters

D.D. of Granville, NSW, takes no issues with the general thrust of the May "Forum" but he does examine the text somewhat clinically — an eventual-

ity for which any technical writer must be prepared. One point I must concede forthwith. I quote:

*On page 17, you stated that the approximate wavelengths of red, green and blue light were respectively 615um, 532um and 470um. The correct figures are 615nm, 532nm and 470nm. Note nanometres instead of micrometres.*

I tried to check on whether I should accept personal responsibility for the error or blame a sub-editor or typesetter instead but, unfortunately, I had discarded my duplicate print-out after publication and deleted the file from the floppy disc on which it was stored.

As it happens, the book mentioned in the May Forum and to which I referred for the exact figures (Colour Television — the PAL system by Prof. G.N. Patchett) used the abbreviation "mu" followed by the explanation in brackets: (a millimicron or nanometre is  $10^{-9}$  metre).

I can't be sure now whether I used that same abbreviation "mu", which became inadvertently reversed, or the more recent "nm" which emerged from the system as "um". Sorry about that!

But that is not the main thrust of D.D.'s letter, which begins thus:

*The human eye contains receptors (cone cells) of three different types, each type responding to a band in the electromagnetic spectrum. The three bands have their peaks respectively in the red (615nm), green (530nm) and blue (470nm) regions. The combined response band defines the visible part of the spectrum.*

*The presence of only three different colour receptors means that the colour information sent to the brain is in an RGB format, and the sensations produced thereafter are purely "subjective". Since both the red and the green receptors respond to the yellow part of the spectrum (560nm) the response of the eye to spectrally pure yellow light can be simulated with the correct combination of red and green light.*



Perhaps because of the bracketed wavelength figures, the above statement comes across as being rather dogmatic, and I couldn't help but wonder whether, by implication, the writer was seeking to counter my suggestion on page 17 (col.1) of the May issue that primary colours, in general, are not as unique as many may have believed — a point made quite specifically by Professor Patchett.

### Average visual response

While some textbooks may indeed carry an overall visual response curve for a "standard observer", and for the separate receptor groups, it is important to realise that such curves are not based on direct measurements, as for electro-optical devices. They can only be deduced indirectly, and by averaging the observations of many subjects. Individuals may react to, or see colours quite differently, with something like 10% of adults having sufficiently impaired colour vision to be considered at least partially colour blind.

(In his book "Colour Television Servicing" (Newnes-Butterworths, 1979) Gordon J. King mentions the possible difficulties which a partially colour blind technician might encounter in seeking to adjust the colour balance of a TV receiver.)

It would be surely stretching credibility to assert that the primaries have a unique and precise wavelength, determined by human vision, when the receptors in individual eyes have such an imprecise and overlapping response.

The wavelength figures mentioned in the May Forum and in the letter above actually relate to the so-called "illuminant C", adopted by the television industry in an effort to standardise, for their own convenience, the functional primaries and a white level, described in broad terms as "a rather blue white, corresponding to sky-scattered daylight". According to my information, they were chosen for their ability to reproduce a wide range of intermediate hues, consistent with the availability of suitably efficient phosphors.

The letter continues:

*Having established the above facts, it becomes clear that the concepts of primary colours and mixing (whether additive or subtractive) are intimately connected with the nature of the human eye. For example, there are three primary colours (in both the additive and subtractive case) simply because the eye has three different types of colour receptors*

*and the optimum choice for these colour primaries is determined completely by the response band of these receptors — an important point, essential to a true understanding of colour mixing, which is rarely mentioned in such discussions.*

My unease persists about the "dogmatic" approach. I accept that the choice of optimum primary colours in "intimately connected with" the nature of the human eye, but "determined completely by" is a sweeping statement open to misunderstanding and debate.

Television is relatively unambiguous optical medium, in that the eye is presented directly with the primary source colours it needs to simulate a close approximation of the original scene: simple additive mixing. I have already suggested, however, that efficiency was a consideration in the choice of phosphors.

In the case of a photographic print, painting, or magazine illustration, the light energy reaching the eye is what remains after various wavelengths have been subtracted in various ways from the nominal white light, which illuminates the picture. By "various ways" I refer to complex reflection from surface particles, from within the coating structure and from the backing layer.

For sure, the eye needs an appropriate pattern of reflected light but the physical routines of photography, painting and printing go well beyond the mere use of three subtractive (or complementary) colours predictably located on an RGB diagram. Particularly in painting and printing, a wide range and an indeterminate number of pigments or inks may be used to obtain the desired end result.

### How good is TV colour?

But, we are not yet done with sweeping statements:

*The reproduction of colour images, by whatever means, therefore requires something which stimulates the eyes in the same way that the original image does. Colour TV receivers achieve this by the use of red, green and blue phosphors, which stimulate separately the red, green and blue receptors. The fact that each phosphor can act separately on each type of receptor means that any response of the eye can be simulated.*

For emphasis, the writer underlined the word "any" in the last sentence. In fact, while most textbooks on the subject agree that the range of colours available from the television system is exceptional, some colours which occur in nature do lie outside the classic, text-

book colour triangle. On that basis, D.D. may need to modify his reference to "any (underlined) response".

### The same, only different!

But enough of what may be seen as mutual quibbling. D.D. concludes his letter with a couple of observations which you might like to think about. While professing little expertise in the area of photography, he has this to say:

*You question how colour film "can present to your eyes colours which presumably did not exist in the first place".*

*To answer such a question, one must precisely define what is meant by "colour". The most practical definition is in terms of the response induced from the eye: i.e. two spectral distributions are the same colour if the eye responds to them in the same way. A consequence of this definition is that most colours do not have a unique spectral distribution. It follows from this that the spectral distribution presented to your eyes by the reproduction of the image does not have to be identical to that of the original image for it to be the same "colour".*

*From the definition of colour that I have adopted, a colour film does not need to reproduce the spectral distribution of the image in order to present the eye with a suitably "accurate" reproduction.*

In the above statement, D.D. has the support of my dictionary, which confirms that the word "colour" refers primarily to the evaluation of transmitted or reflected light by the "visual sense". It goes on to explain that the determining factor for such evaluation is in the spectral composition, as expressed in hue, chroma (purity or saturation) and luminance (brightness).

It's interesting to ponder how different the world around us might look if, instead of those three relatively broad band sets of colour receptors, we were selectively sensitive to peaks in the spectral output, reflection or transmission of light sources, pigments, filters and window panes. It would be novel but it might also pose a few practical problems, as D.D. points out in closing:

*If it was essential to reproduce spectral distributions accurately for successful colour reproduction, in most cases the reproduction of colour images would not be feasible — it would be too difficult. This sort of reproduction would be necessary if the eye had a large number of different colour receptors each having a narrow response band. It would increase the number of primary colours required*



# FORUM

to generate an acceptable colour image. Instead of three different phosphors, ten or twenty might be required.

Indeed, most of the colour reproduction we take for granted would not be practical if the eye was spectrally more discerning.

Many thanks, D.D. for so effectively stirring the communal mental pot!

## From a keen photographer

Another NSW reader, who for personal reasons, requests that he not be identified, has addressed himself to the question of what happens when a TV colour image is photographed. He also draws attention to a slip in the text of the May Forum at the bottom of col.1, p.18, where we attributed subjective yellow to the "blue and green phosphors glowing brightly, side by side". Fortunately he says, the error was apparent as such from the text which followed. Sorry about that one, also!


More importantly, in response to my admitted "stirring", he worked out what would happen in the various layers of a slide film after exposure, during the various processing steps, through to the finished transparency; this with the aid of blocks of little rectangles, all dutifully filled in with coloured crayon. For good measure, he took some slide photos, by way of verification.

He points out that it is possible to take a macro photo of the TV screen, such that the individual red and green dots or lines are resolved on the slide. If this resolution is retained during projection, the two colour sources may be visible as such or may tend to merge into yellow, depending on the viewing distance.

If the projector is deliberately defocused, the individual red and green sources will merge or overlap and will be accepted by the eye as yellow.

On the other hand, if the whole screen is photographed with a 35mm camera, it is likely that the lens will not resolve the individual picture elements. In that case, any given spot on the film will be exposed to (say) red and green light and this is where the writer's little coloured rectangles tell the story:

*The diagram shows that the development of magenta dye is inhibited where the film is exposed to green light. Likewise exposure to red light inhibits the development of cyan. However, exposures to green light and red light result in the development of yellow dye in each*

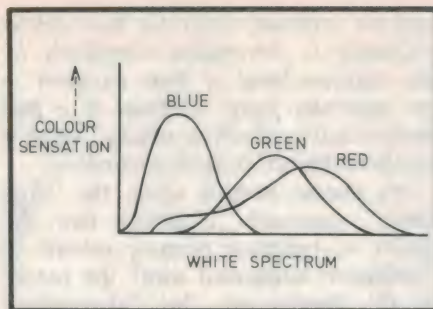

**Illustrating the colour response of the three sets of cone receptors in the human eye. The relative height of the curves may vary with individual eyes. Note that the green receptors are responsive to red light and to a lesser extent to blue.**

*case. The result is exactly the same as if the film had been exposed to yellow light.*

*The diagram also explains how white (clear film) is created if all three colours fall on the same spot, because of limited lens resolution. The result is essentially the same as photographing a white area, reflecting all three primary colours.*

The above explanation suggests a parallel between the interaction of the colour elements with the broadly selective cones in the eye and the broadly selective layers in the film. It even sounds quite simple in a roundabout sort of way!

But, not to be outdone, this second correspondent finishes up with his own proposition for you to think about:

*A partially colour blind person, with reduced red and green vision will see a colour TV picture with the red, green and blue primaries different to a printed picture, film or slide projection, which all utilise cyan, magenta and yellow colours. This difference of perception of various types of colour reproduction extends also to the white areas which, to them, may look tinted on TV.*

Couple this with Gordon King's reference to partially colour blind television technicians and you have a topic for argument over that cup of morning coffee. Does impaired colour vision make it impossible for a technician to set up a colour picture, or is it likely to be right when it looks normal to him?

## Go easy on valves!

By way of a complete change of subject, C.M. of Lugarno, NSW, was apparently disturbed by an article which he came across in a back issue (September '83) entitled "Valves are dead — but not forgotten".

The article described a rebuild of the

ancient "Three-Band Two" regenerative receiver, originally featured (so the author said) in May 1957 and updated in October 1966. It used a 6U8 or 6BL8 valve, with the pentode section serving as a regenerative detector and the triode as an audio amplifier, to drive either headphones, or, alternatively, a loudspeaker at necessarily modest volume. The second valve was a 6X4 rectifier.

The idea behind the rebuild was to discover whether it was still practical or worthwhile for beginners to tackle such a project in late 1983, using parts that were available over the counter, as distinct from the left-overs in somebody's junk box.

By all accounts, the rebuild proved disappointing by current standards and a poor investment in terms of the dollars likely to be spent on parts, considering the results likely to be achieved. On the other hand, the author said, if you had a boxfull of left-over bits and the urge to build up such a receiver, by all means do so — but don't expect too much.

When he came across the issue C.M. didn't like the verdict one bit. As far as he was concerned, it was just one more example of the magazine's "habit of knocking valves".

His three page letter, to hand recently, claims that the receiver was a poor choice, anyway, and that a more favourable impression would have been gained had the author opted for the "Three-Band Three" from the November 1966 issue, using a recognised power valve in the output stage. But, in any case, the performance of the "Three-Band Two", 1983 version, could have been upgraded considerably with a few simple modifications which C.M. proceeded to suggest.

Having in mind that I had retired before September '83, and that there has since been a complete turnover in the EA staff, there was no prudent way of determining with what tender loving care the constructor or author had sought to optimise the performance of the rebuild and/or the conditions under which it was finally evaluated. Both aspects were, and still are, critical with these little regenerative receivers being, at the one time, a challenge and a liability.

It is entirely possible that C.M. could have tweaked things to better advantage. I might even have done so myself, given my background as someone whose first experience with wiring involved using a pair of round-nosed pliers to



form square-section tinned busbar to fit the binding post of a UV-200 bayonet socket!

I've talked in recent times about building or re-building simple receivers, if not for nostalgia, at least for the perception they can bring to matters electronic. But to commend and defend valves in terms of efficiency and practicality is something else.

### Even small words matter!

While in the course of writing this article, I received a copy of the September issue and, while scanning through Forum, noted an amazing statement (p.27, col.1, par.3) to the effect that Technics had developed a CD error correction algorithm "so advanced that the chances of retrieving the correct data are an incredible once in 5000 years".

That would be even less than the famous "Buckley's" and one would wonder why Technics bothered!

However, mindful of slips mentioned earlier in the present article, I hastened to put the original text up on the screen. To my relief — mixed with a little frustration — it read "the chances of NOT retrieving the correct data . . . etc." I leave it to you to make the correction.

Admittedly, it may not be as important to do so as in a certain ancient edition of the Bible, from which a compositor is said to have omitted that same little word from the commandment that reads: "Thou shalt not commit adultery".

### Tailpiece

In the *Sydney Morning Herald* pink Guide for August 10, David Frith reported on the introduction to the Australian market of the new, peak performance R852/MD loudspeakers from the Monitor Audio Group, of Cambridge, England. They were being demonstrated by Mo Iqbal, founder and managing director of Monitor, at Bartlett HiFi in Drummoyn, Sydney.

What caught my eye was the statement that the "gorgeous melange of sound" was all coming via compact disc. I quote:

"Mo Iqbal, who loves music and its fine reproduction, has little time for the dichards who insist that black vinyl LP is still the only way to listen to recordings".

I can't do it as well as Richard Carleton on television but, having in mind past exchanges between this column and Sydney's outspoken group of hifi conservatives, I might just be permitted a wry smile!


## Quality Assembly?

## Leave It In Our Capable Hands

The price is right  
and deliveries are  
always on schedule

## Duet Electronics

414 St. Georges Rd  
Thornbury, 3071  
(03) 480-5803 (03) 484-4420  
Distributor in N.S.W.  
16 Barambah Rd  
East Roseville  
(02) 406-5762

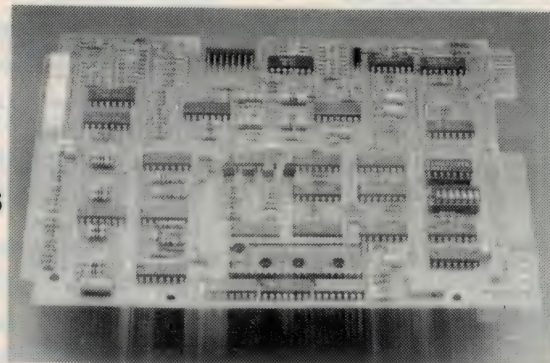

## Duet Electronics

# Australia's Finest C Compiler

main (argc, argv) 00110101100

FROM  
**\$250**

plus delivery

### HI TECH C Compiler

- Complete production quality compiler
- Smallest, fastest code from any compiler
- High performance C Compiler for the Z80, 68000, 65816, and 8086 processors
- Runs on CP/M-80, PC-DOS, MS-DOS, CP/M-86, CONCURRENT CP/M, ATARI ST and APPLE II gs
- Now in use at thousands of sites worldwide, including Australian Government and large institutions.
- Excellent user interface
- ROM code is supported and it includes a macro assembler, linker, librarian, object code converter, cross reference utility and full library source code. The 8086 compiler supports large and small memory models and the 8087

FROM  
**\$300**

plus delivery

### Cross Compilers

- Run under MS-DOS, UNIX, and CP/M-86 and produce code for the 68000, 8086/286, 65816, 8096 and Z80 processors. Each compiler includes an assembler, linker, librarian, object code converter and cross reference utility.



The Cutting Edge



Order from: **HI -TECH SOFTWARE**

P.O. Box 103 Alderley 4051


Telephone (07) **366 6971**



## F-111 cutaway

- 1 Hinged nose cone
- 2 Attack radar
- 3 Terrain-following radar
- 4 Nose hinges (2)
- 5 Radar mounting
- 6 Nose lock
- 7 Angle-of-sideslip probe
- 8 Homing antenna (high)
- 9 Forward warning antenna
- 10 Homing antenna (low and mid)
- 11 ALR-41 antenna
- 12 Flight control computers
- 13 Feel and trim assembly
- 14 Forward avionics bay
- 15 Angle-of-attack probe
- 16 UHF Comm/Tacan No 2
- 17 Module forward bulkhead and stabilization flaps (2)
- 18 Twin nosewheels
- 19 Shock strut
- 20 Underfloor impact attenuation bag stowage (4)
- 21 Nosewheel well
- 22 LOX converter
- 23 Rudder pedals
- 24 Control column
- 25 LOX heat exchanger
- 26 Auxiliary flotation bag pressure bottle
- 27 Weapons sight
- 28 Forward parachute bridle line
- 29 De-fog nozzle
- 30 Windscreen
- 31 Starboard console
- 32 Emergency oxygen bottle
- 33 Crew seats
- 34 Bulkhead console
- 35 Wing sweep control handle
- 36 Recovery chute catapult
- 37 Provision/survival pack
- 38 Attenuation bags pressure bottle
- 39 Recovery chute
- 40 Aft parachute bridle line
- 41 UHF
- 42 Stabilization-brake chute
- 43 Self-righting bag
- 44 UHF
- 45 ECM antennae (port and starboard)
- 46 Forward fuselage fuel bay (2,340 Imp gal/10,638 litres)
- 47 Ground refuelling receptacle
- 48 Weapons bay
- 49 Module pitch flaps (port and starboard)
- 50 Aft flotation bag stowage
- 51 Air refuelling receptacle
- 52 Primary heat-exchanger (air-to-water)
- 53 Ram air inlet
- 54 Rate gyros
- 55 Rotating glove
- 56 Inlet variable spike

- 57 Port intake
- 58 Air brake/undercarriage door
- 59 Auxiliary inlet blow-in doors
- 60 Rotating glove pivot point
- 61 Inlet vortex generators
- 62 Wing sweep pivot
- 63 Wing centre-box assembly
- 64 Wing sweep actuator
- 65 Wing sweep feedback
- 66 Control runs
- 67 Rotating glove drive set
- 68 Inboard pivot pylons (2)
- 69 Auxiliary drop tanks (500 Imp gal/2,273 litres)
- 70 Outboard fixed pylon (subsonic/jettisonable)
- 71 Slat drive set
- 72 Wing fuel tank (324 Imp gal/1,473 litres)
- 73 Leading-edge slat
- 74 Starboard navigation light
- 75 Flap drive set
- 76 Outboard spoiler actuator
- 77 Starboard spoilers
- 78 Inboard spoiler actuator
- 79 Flaps
- 80 Wing swept position
- 81 Auxiliary flap
- 82 Auxiliary flap actuator
- 83 Nuclear weapons and weapons control equipment package
- 84 Wing sweep/Hi Lift control box
- 85 Flap, slat and glove drive mechanism
- 86 Starboard engine bay
- 87 Yaw feel spring
- 88 Roll feel spring
- 89 Yaw trim actuator
- 90 Yaw damper servo
- 91 Roll stick position transducer
- 92 Pitch trim actuator (manual)
- 93 Roll damper servo
- 94 Pitch trim actuator (series)
- 95 Pitch feel spring
- 96 Pitch-roll mixer
- 97 Pitch damper servo
- 98 Pitch stick position transducer
- 99 Aft fuselage frames
- 100 Aft fuselage fuel bays (1,191 Imp gal/5,413 litres)
- 101 Horizontal stabilizer servo actuator
- 102 Starboard horizontal stabilizer
- 103 Aft warning antennae
- 104 HF antenna
- 105 Detector scanner
- 106 X-Band radar
- 107 Rudder
- 108 Integral vent tank
- 109 Fin aft spar
- 110 Fin structure

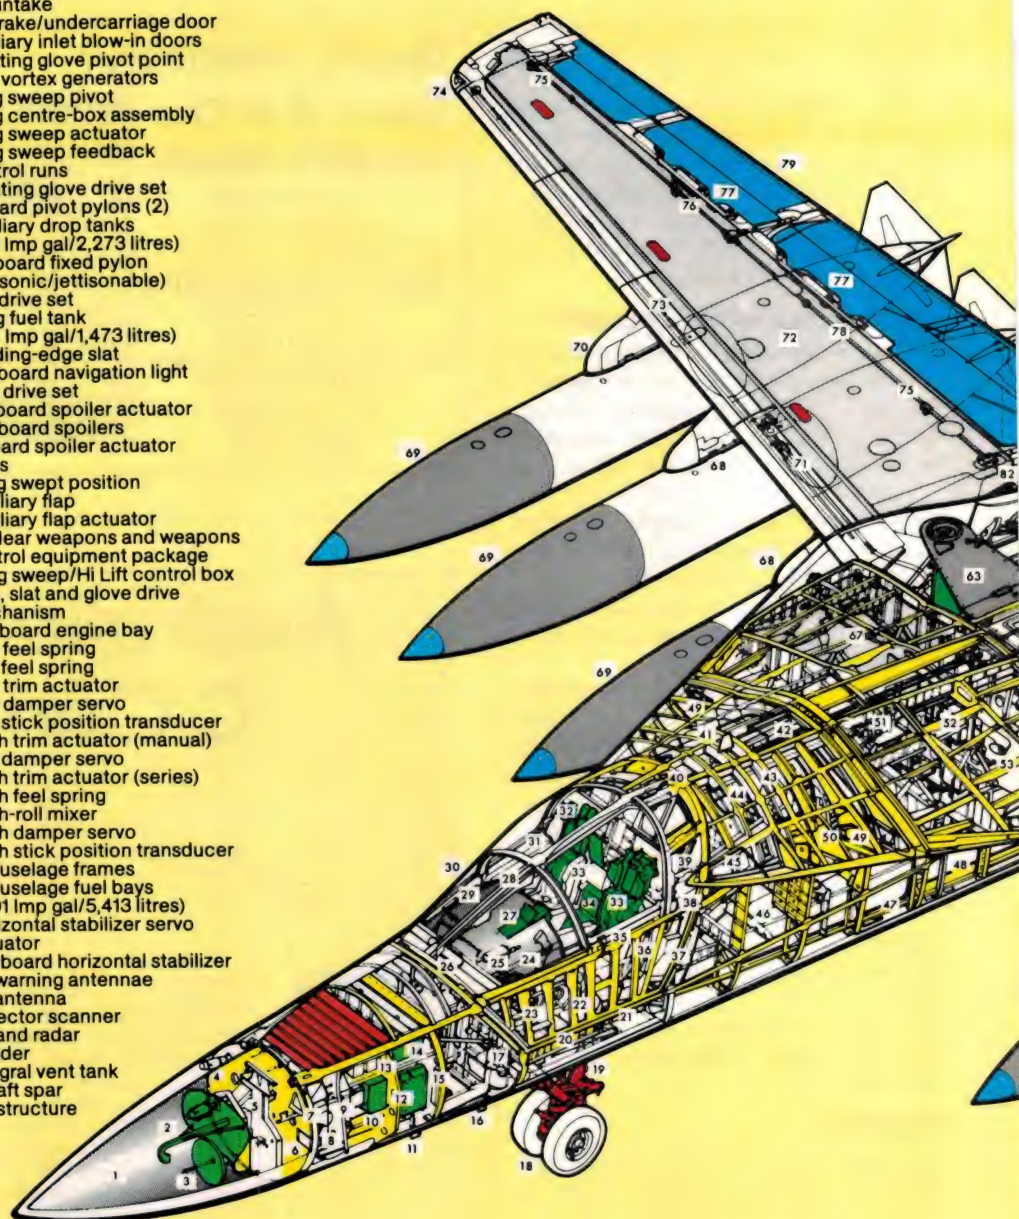

# “Now put it back to

You're looking at a technological marvel.

It's called an F111C.

It's a high-performance, supersonic swing-wing strike reconnaissance aircraft.

An aircraft that has distinguished itself in several combat zones around the world.

It's a very complex machine made up of more than three million separate parts, each and every one vital to the aircraft's performance.

Indeed, for every hour of flying time, it must spend many on the ground being checked, double-checked and checked once again.

By perfectionists.

The men and women who perform the many tasks needed to keep it flying are RAAF technicians.


They learn their skills through our Certificate of Technology, Trade Apprentice and Adult Technical Training Schemes.

Quite frankly, RAAF technicians represent the very best in their various fields.

These include avionics, armaments, electronics, propulsion systems and even fibre optics.

Once posted to operational duties, we expect them to very quickly put themselves on a first-name basis with



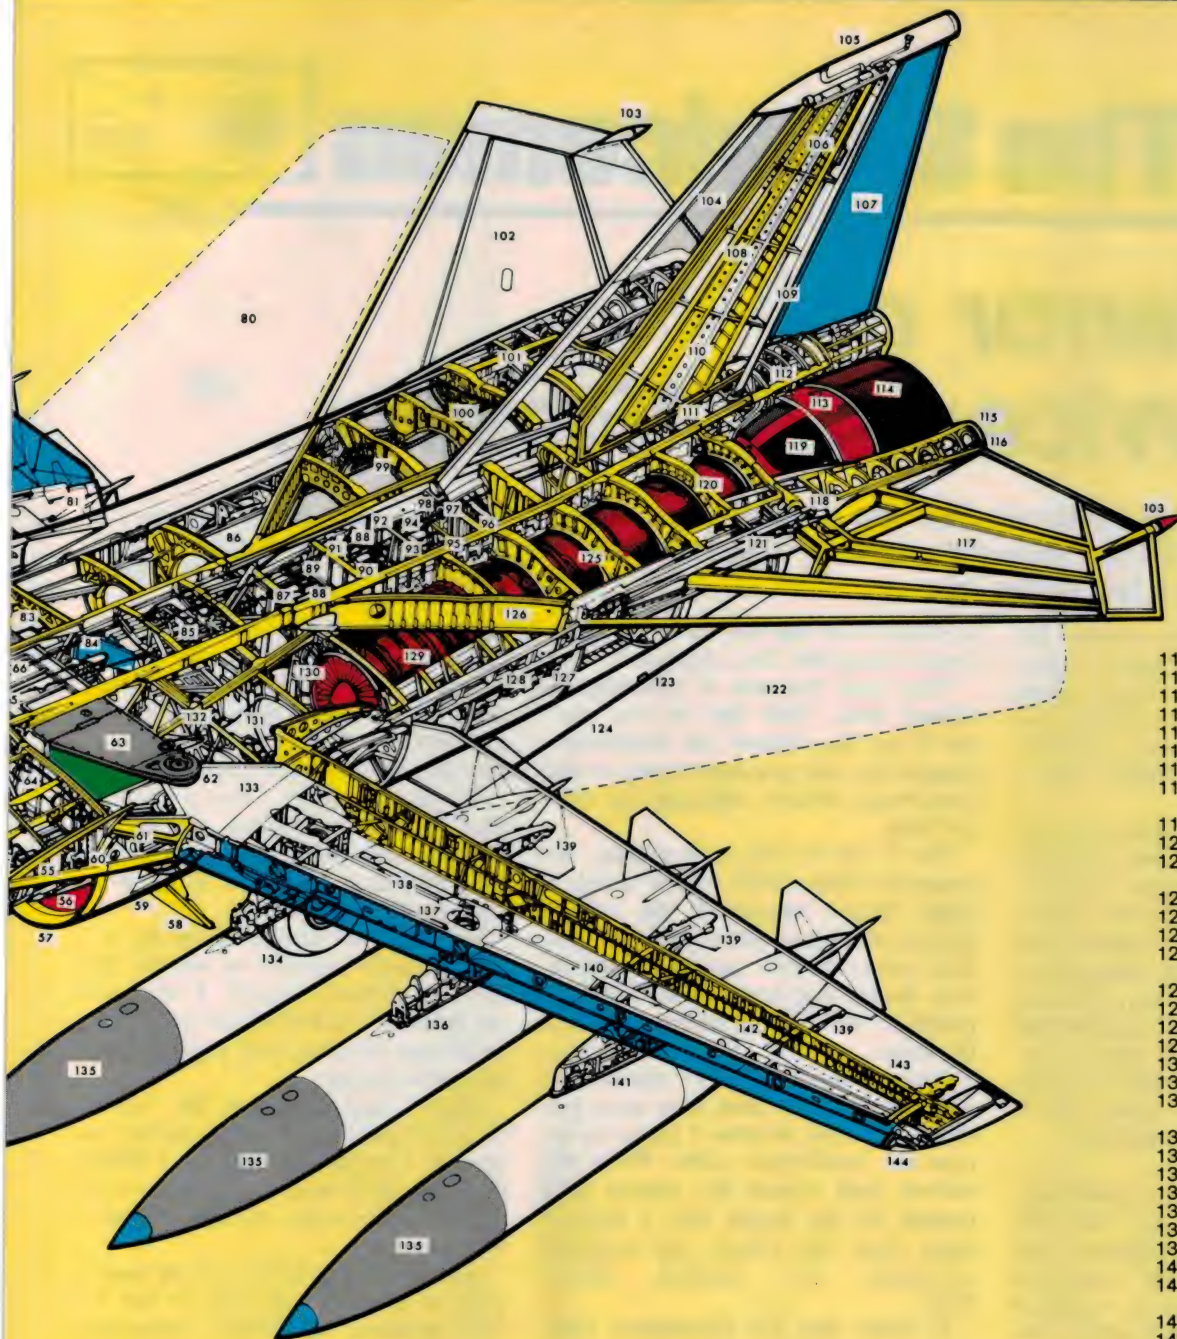

- 111 Fin/fuselage attachment
- 112 Rudder servo actuator
- 113 Variable nozzle
- 114 Tailfeathers
- 115 ECM antenna
- 116 ALR-41 antenna
- 117 Horizontal stabilizer structure
- 118 Horizontal stabilizer servo actuator
- 119 Free floating blow-in doors
- 120 Afterburner section
- 121 Horizontal stabilizer servo actuator
- 122 Wing swept position
- 123 UHF
- 124 Ventral fin
- 125 Fire detection sensing element loops
- 126 Cross frames
- 127 Engine access hatches
- 128 Engine accessories
- 129 Pratt & Whitney TF30 turbofan
- 130 Three-stage fan
- 131 Intake duct
- 132 Fire extinguishing agent container and nozzles
- 133 Wing box skinning
- 134 Port mainwheel
- 135 Auxiliary drop tanks
- 136 Pivot pylon
- 137 Pivot point
- 138 Pivot actuator
- 139 Flap racks
- 140 Fixed pylon strong point
- 141 Outboard fixed jettisonable pylon
- 142 Wing integral fuel
- 143 Wing box structure
- 144 Port navigation light

# gether, Corporal."

every nut, bolt, rivet and electrical circuit of their aircraft.

And that could be any one of the 17 different types currently in service with the RAAF.

If this sounds demanding, you're absolutely right.

But these are the characteristics that make RAAF technicians the most sought-after by civilian employers.

If you think you've got what it takes to be the best in your field, fill in the coupon and send it off now.

All we require is that you're an Australian citizen.\*

You must be between 16 and 21 with good results in English, Maths and Physics (17-34 years for Adult Training). You should also be reasonably fit.

\*Or eligible to become one

To: RAAF Careers, Freepost 2600AF, GPO Box XYZ (in the Capital City nearest you).

Name \_\_\_\_\_

Address \_\_\_\_\_


Postcode \_\_\_\_\_

Telephone \_\_\_\_\_

Date of Birth \_\_\_\_\_

Highest Educ. level attained or being studied \_\_\_\_\_



Or phone an RAAF Careers Adviser on Adelaide 212 1455. Albury 21 8277. Bendigo 43 8008. Brisbane 226 2626. Canberra 82 2333. Geelong 21 1588. Hobart 34 7077. Launceston 31 1005. Melbourne 696 2677. Newcastle 26 3011. Parramatta 635 1511. Perth 325 6222. Sydney 219 5555. Townsville 72 4566. Wollongong 28 1855.

**GROUNDCREW**  **RAAF**

Authorised by the Dept. of Defence.

RTA 191.DPS.77R





## That terror of TV servicemen: "Ftsss . . ."

Sooner or later, most TV servicemen are suddenly stricken by something that all of them dread: the terrible "Ftsss" disease. It was my turn only a few weeks ago.

One of the problems facing the operator of a one man business is personal illness. Most of us struggle along through the most appalling sickness just to keep faith with customers, who often don't appreciate our sacrifices. But I have been fairly lucky.

Since I left the air conditioned comfort of the public service some years ago I have had very little illness. An occasional cold in the head, a few cut or spiked fingers and a few bruises once when an angry truck driver thumped me for not getting out of his way. Nothing dramatic — just the usual mishaps that befall most of us at one time or another. But all that changed recently when I contracted that terror of TV servicemen, the dread disease Ftsss . . .

It came about like this.

A customer brought in a small General portable colour TV set. The problem was uncontrollable brightness and retrace lines. This usually causes no problems. It's a resistor or capacitor open circuit, or something similar. Although I had no circuit diagram for this set I anticipated a relatively easy job. Until I tried to lift the back off.

Six screws secured the back and antenna panel and these were easily removed. But unknown to me the power transformer was attached to the inside of the cabinet back and made this all unbalanced and wobbly as I lifted it away.

At the same time, the leads from the transformer pulled at the chassis and threatened to tip the whole mess onto the floor. After such an inauspicious beginning, I didn't hold any further hope for an easy task.

One of those diodes leading from the line output transformer gave a suspect reading and as this supplied the second anode in the picture tube, I had reason

to suspect that this was the cause of the owners complaint. So I changed it.

Then came the task of replacing the cabinet back. With this set you can't run it on test without the transformer plugged in, and you cannot plug in the transformer without replacing the cabinet back.

This is not as easy as it sounds, because the vertical hold control is only a rather flimsy trimpot. If the cabinet back is not aligned perfectly the trimpot shaft misses the hole and the pot will be bent double and broken off. This happened to me twice in trying to replace the cover.

After struggling for 15 minutes to refit the cabinet I must have been getting a bit tired, because I forgot to secure the transformer cable. When the cabinet back missed the vertical hold control for the fourth time I lifted it away from the chassis and suddenly contracted the dreaded disease Ftsss . . .

It seems that the transformer cable had hooked itself under the picture tube base board and lifted away board, base and tube neck in one horrible hissing "Ftsss . . ." Now most diseases have a typical prognosis — the symptoms are characteristic and predictable. The sore throat comes before the temperature and the runny nose afterwards. So it is with Ftsss . . .

The first symptom is the sick feeling in the stomach as the implications sink in. "How will I tell the customer? Can I get a new tube? And can I afford it if it is available?" This symptom might last from ten minutes to half an hour and can be accompanied by bouts of flinging — screwdrivers, pliers, soldering irons, or anything handy that is not nailed down.

The second symptom usually appears

just before the customer answers your phone call. It is manifested as a severe nervous tremor and an acute anxiety about the possibility of the customer reaching through the phone to strangle you with your own necktie. The severity of this symptom can be lessened by two or three stiff drinks before dialling the customer's number, but nothing can stop the shaking completely.

The final symptom comes a few days later as you contemplate the sudden dramatic and violent contractions that convulse your bank balance as you write a cheque for the new tube.

With all these terrors facing me as I listened to the last faint sss whisper into the now defunct General, I wondered yet again if I had done the right thing by leaving the cosy, well paid world of the public service.

After I had picked up the various tools that had been flung on the floor in temper, I composed myself and dialled the customer's number. I had decided to get it over with, before the shakes took hold.

And would you believe it? He wasn't going to chop me after all. In fact his only comment was "What rotten bad luck! Oh well! Thanks for trying anyway. Will you get rid of the rubbish for me?" It's true. That's what he said.

None of the colleagues to whom I have related this story will accept it as the truth. This sort of customer is only a TV serviceman's pipe dream and doesn't exist in real life!

But there is just one of these imaginary customers, and amazingly he lives on my patch. I've still got the junked set to prove that at least once I've come out on top.

I didn't have nearly as much luck with another TV set this month, however — just to make up for things.

A television set is, to its owner, a complicated mass of electronics that only a genius could understand. A lot of TV technicians have a similar feeling to-



wards the sets they work on and they approach each fault as if it was a major exercise in obscure mathematics or physics.

Yet, when you know something about TV's, you realise that each set breaks down into logical circuit blocks. Although some blocks are complicated and hard to understand, other sections are basically simple and use techniques that are taught to young technicians in their first year at college.

For instance, the vertical amplifier, drive and output stages are not much different to an audio amplifier. When you think of it, the vertical stage has to handle a 50Hz signal with almost no distortion and this is just what a good audio amplifier has to do.

The sync separator and vertical oscillator are a bit out of the ordinary, as is the wave shaping network that follows. This network is required to deliver a sawtooth waveform to the output stage. But once the correct signal is developed, a good audio amplifier with low distortion and sufficient power handling capabilities should be quite able to handle the TV signals. And servicing the vertical output stage should be no more difficult than servicing an audio amplifier. Or so you might think!


All of this preamble is a lead up to a story about a Sharp portable colour TV, model C-146X with no vertical scan. The picture had collapsed into a moving, coloured horizontal line. This fault is common to all brands of televisions and usually offers no real problem in finding the fault and restoring the set to normal.

Unfortunately, this Sharp circuit uses feedback from the output stage to provide not only linearity but also bias to the driver stage. So the driver can't get going until the output comes up, which doesn't happen until the driver gets going. Now, how do you get out of that one?

This kind of feedback is common in power supply circuits, where a pulse from the line output stage is used to drive the power supply chopper. But until the chopper is working, there can be no power to run the line output to supply the pulse.

In this situation, a kickstarter is provided to run the supply for a second or two, while the line stage starts up. This sort of feedback can be the dickens to sort out, since any part of the loop can be the source of the trouble. Even the kickstarter can cause trouble, even though it is logically outside the loop.

The first line of attack is to measure all the voltages that are accessible, and

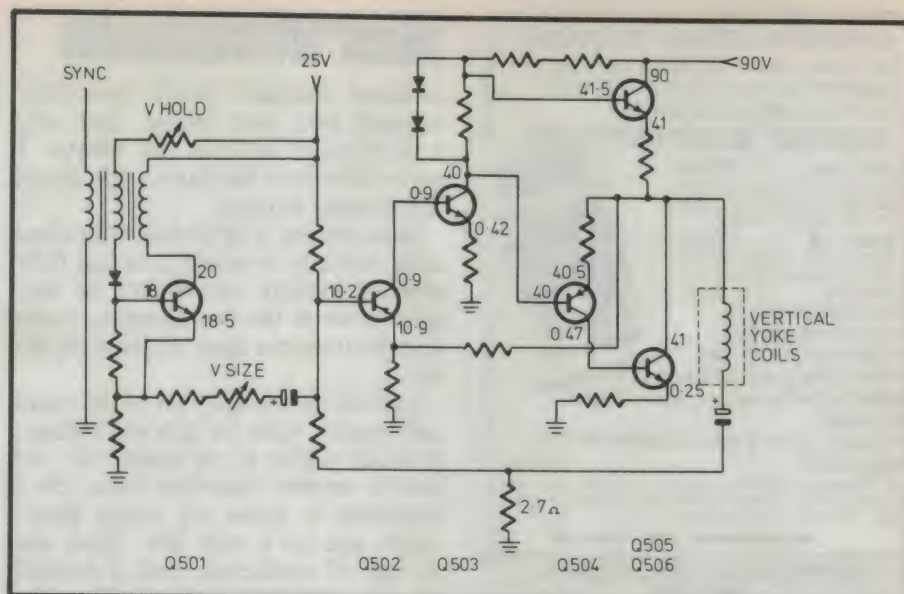

**A simplified version of the vertical sweep circuit in the Sharp C-146X receiver, as discussed below.**

to compare them with those given on the circuit diagram. This sometimes points to the faulty part, but more often makes sense only after the fault has been found.

The vertical circuit in this Sharp TV consists of Q501, a blocking oscillator followed by a wave shaping network. This delivers a sawtooth wave to the base of the first driver, Q502, a PNP transistor which receives its base bias from the same source as the oscillator. This was the last place at which I was able to measure a correct voltage. From here on everything was haywire.

The emitter of Q502 should have on it about 10 volts, divided down from the 40 volt mid-point in the output pair. Its collector should deliver about 0.9V to the base of Q503, which doubles as an amplifier and voltage regulator to set the bias on the top output transistor.

The signal passes to a third amplifier Q504 which in turn drives the bottom transistor in the output pair. All of this, mark you, is direct coupled and of course, every component checked OK. The only problem was that it didn't work and all the voltages were quite wrong.

In fact, it's not right to say the voltages were wrong, because there weren't any to be wrong. Only the 120 volt rail to the top of the output pair was normal. Every other point except the base of Q502 was reading 0 volts.

If I had been wide awake, I might have seen the significance of the 0 volts on most of the transistor elements. It was a direct pointer to the cause of the trouble, but I missed it and spent hours removing and measuring all the compo-

nents around the output and driver stages.

As far as I could see, the key to the puzzle was the mid-point in the two output transistors. When they were operating properly, the voltage at this point was fed back to the earlier stages to provide supply to Q502 and Q504, and indirectly to the bias Q503.

Quite obviously there was a faulty component in the system and as nothing I could think of would point to the culprit, there remained only the tedious and thankless task of removing each part and testing it individually.

Fortunately, most of the vertical system is on a small plug-in board and it was easy to work on this on the bench. The few remaining parts on the chassis offered no real problems in getting an accurate measurement. Except that every part — transistors, diodes, caps, and resistors all checked and measured spot on.

So, if there were no faulty parts in the circuit, why didn't it work? It was not until this point that I realised that the fault was probably not present until the circuit was energised. It wouldn't be the first time that a component only broke down under load.

And then the penny dropped. When I had measured voltages early in the exercise, I had found the collector, base and emitter of Q503, in particular all read the same 0 volts. In fact, they were all just a few millivolts above ground instead of the 420mV shown on the schematic.

From the dim mists of my memory I recalled a teacher once straining my intelligence by trying to explain that a



## Looking to purchase instruments

We are stockists of **Labtech, Fluke, Trio**, and **Goodwill**: so if you're in the market for an oscilloscope, think of **David Reid**.

### ESCORT MULTIMETERS

- EDM 1105** \$83.59  
 • 3½ digits • Six functions: DCV, ACV, DCA, ACA, OHM, Diode Testing.  
 • 0.8% basic DC accuracy.
- EDM 1116** \$106.03  
 • New model complete with transistor and capacitor tester.
- EDM 1118** \$120.23  
 • 3½ digits with DB range
- EDM 1111A** \$98.00  
 • Capacitor & Transistor
- EDM 72B** • Capacitor Checker
- EDM 75B** • Transistor Checker \$70.69
- EDM 70B**  
 • Rotary switch • Mini Pocketsize \$51.27
- EDM 1346A** \$238.57  
 • 4½ digits • Eight functions: DCV, ACV, DCA, ACA, OHM, Audible Continuity Testing, Diode Testing, Data Hold. • 0.05% basic DC accuracy, with Freq range

All multimeters + 20% Sales Tax

Ring us first for your 20 Meg. Oscilloscope enquiries!

### NEW GOS-522

1 YEAR

WARRANTY!

#### FEATURES

- Large 6 inch rectangular internal graticule CRT
- CH1 & CH2 ALT Triggering (Alternate triggering function)
- High Sensitivity 1mV/div
- Hold-off function
- TV Sync. Separation circuit
- CH1 Signal output

\$745.00

20% TAX

Plus 2 probes included in this deal.

Check out our kit range

Here's a few to have a go at

#### Megohm Meter

It uses a transistor inverter to produce a regulated 1000V DC supply which is applied to the insulation under test. Insulation resistances between 2M Ohm and more than 2000 Ohm can be measured. K 2500 (See EA July '85).

\$55.00

**K6400** \$35.00

Temperature Control For Soldering Iron

**K2525** \$25.00

Simple Transistor Tester

**K2530** \$17.50

In Circuit Transistor Tester

**K5510** \$16.50

General Purpose Pre-amplifier

**K5540** \$14.95

Voice Operated Relay

**K3210** \$79.00

30V/1 Amp Power Supply

**K3300** \$165.00

50V/5 Amp Power Supply

**K3320** \$129.95

Dual Tracking Power Supply

**K2522** \$79.00

Digital Capacitance Meter

These are just a few of the many 100's of up-to-date Electronic items on display at



**DAVID REID ELECTRONICS LIMITED**

127 York Street, Sydney, 2000  
 or Telephone (02) 267 1385

## Serviceman

saturated transistor would have 0.6V between base and emitter, and only 0.3V between collector and emitter. I never did master the physics that allows this anomaly to occur.

Nevertheless, if Q503 had been operating normally, it would have had 0.3V between collector and emitter. So zero volts between the two elements meant that the transistor must be short circuited.

I pulled the offender out of the board and tested it again for gain and leakage. It tested perfect in my multimeter and also in another transistor tester. So I connected it across my bench power supply and fed it with 30V. There was no sign of conduction, until I touched the base lead with my finger. Then, the supply voltage dropped to almost zero as the current jumped to the supply's current limit point.

Further testing showed that the transistor worked perfectly up to 15 volts, but at any Vce above that it turned itself into an SCR and switched on with the slightest input on the base. What would you call it — a voltage dependent bipolar SCR? It's a real funny one and the whole job was nothing at all like any audio amplifier I've ever serviced.

This had been another of those jobs that makes the taxman doubt my honesty. It took something like five hours to sort this one out, and there is no way I could charge for more than one hour. I only hope I will find more of these faults so that I can recoup some of the time lost on this one.

And just to finish up this month, a little story which shows that it's not only the lowly technician that makes silly mistakes. Even the professional engineer can make a boomer (literally) at times.

A group of techs were recently being shown over the transmitters in a country radio station and the engineer doing the demonstration was relating some of the service problems that he had come across. Most difficulties are quickly solved by switched in the standby transmitter, after which the breakdown can be tackled in relative calm, late at night when the station is off the air.

One such problem concerned the 2.5kW standby transmitter itself, which was not delivering its full head of steam. Our engineer felt that perhaps the rectifiers feeding the 3kV to the anode of the output tube might be a bit weak, hence low anode voltage and low output. But how do you check 3kV at a

couple of amps?

The problem was complicated by the fact that interlocks on the cabinet doors were very nearly foolproof. Bypassing them would have been a long job. It was far easier to put a meter inside the cabinet and close the doors. The meter scale could then be clearly seen through the windows in the panels.

So a small multimeter was securely mounted on a plastic stand inside the transmitter cabinet, alongside the big output tube. The leads were carefully routed to the anode and cathode terminals and firmly fixed in place.

When the cabinet doors were closed and the interlocks released the safety switches, the tube heater began to glow. Another interlock prevents the HT being applied until the tube is thoroughly warmed up, so our engineer spent the two minute waiting time checking his handywork.

It was just as he was pressing the HT switch button that he noticed that the meter was switched, not to 5kV as he intended but to the low ohm range.

It wasn't the blinding flash that worried him so much as the deafening "boom" as the meter disintegrated before his startled eyes. He pulled the main switch and drove a shaky course to the relative safety of his home.

His multimeter is still spread over the inside of the transmitter cabinet, as a smoky grey stain that will still be there when the station closes down for the last time. Now that the shock has worn off he says philosophically, "Oh well, it was only a \$30 meter anyway".

## TETIA Fault of the Month


### Sony KV-1310E

**Symptom:** Thermal cutout continues to trip after replacing shorted chopper transistor. All transistors OK and set operates properly from independent 110V supply.

**Cure:** D609 (MZ-12) 12 volt zener open circuit. This causes error amplifier to sense low output and to open the mark/space in an attempt to compensate. If the zener was shorted, the supply would shut down harmlessly.

*This information is supplied by courtesy of the Tasmanian branch of The Electronic Technicians' Institute of Australia. Contributions should be sent to J. Lawler, 16 Adina St, Geilston Bay, Tas 7015.*





### 3M DYNAMARK PHOTOSENSITIVE (EX SCOTCHCAL)

All prices per box and include tax

<b>8007 REVERSAL FILM</b>	
250 x 300mm (10 sheets)	\$39.95
300 x 600mm (5 sheets)	\$54.95
<b>8005 BLACK ALUMINIUM</b>	
250 x 300mm (10 sheets)	\$69.95
300 x 600mm (5 sheets)	\$79.95
<b>8009 BLUE ALUMINIUM</b>	
250 x 300mm (10 sheets)	\$69.95
300 x 600mm (5 sheets)	\$79.95
<b>8011 RED/WHITE</b>	
250 x 300mm (10 sheets)	\$64.95
300 x 600mm (5 sheets)	\$74.95
<b>8013 BLACK/YELLOW</b>	
250 x 300mm (10 sheets)	\$64.95
300 x 600mm (5 sheets)	\$74.95
<b>8015 BLACK/WHITE</b>	
250 x 300mm (10 sheets)	\$64.95
300 x 600mm (5 sheets)	\$74.95
<b>8016 BLUE/WHITE</b>	
250 x 300mm (10 sheets)	\$64.95
300 x 600mm (5 sheets)	\$74.95
<b>8018 GREEN/WHITE</b>	
250 x 300mm (10 sheets)	\$64.95
300 x 600mm (5 sheets)	\$74.95

### CRYSTALS SPECIALS!

Description	Cat.No.	1-9	10+
1MHz	Y11000	\$7.50	\$7.00
4.433618MHz	Y11023	\$2.95	\$2.75
8.867238MHz	Y11055	\$2.95	\$2.75
12MHz	Y11070	\$2.95	\$2.75
14.31818MHz	Y11072	\$2.95	\$2.75

# BARGAINS!



### SPECTROL MULTIDIALS MODEL 15-1-11

Number of turns: 10  
Minor Scale Division: 1/500 turn  
Shaft Bore: 6.35mm (1/4")  
Finish: Satin Chrome  
Body Size: 25.4 x 44.45mm  
(1 x 1 3/4")  
Depth: 25.4mm (1")  
Weight: 45.4g (1.6oz)  
Cat.R14405 ..... \$45.95

### MODEL 16-1-11

Number of turns: 15  
Minor Scale Division: 1/500 turn  
Shaft Bore: 6.35mm (1/4")  
Finish: Clear Anodize  
Body Size: 22.2mm diameter (.875")  
Depth: 22.2mm (.875")  
Weight: 19.8g (.70oz)  
Cat.R14400 ..... \$26.95

### MODEL 21-1-11

Number of turns: 15  
Minor Scale Division: 1/100 turn  
Shaft Bore: 6.35mm (1/4")  
Finish: Satin Chrome  
Body Size: 46.04mm diameter  
(1 1/2")  
Depth: 25.4mm (1")  
Weight: 85.9g (3.0oz)  
Cat.R14410 ..... \$46.95



### 10 TURN WIRE WOUND POTENTIOMETER

Spectrol Model 534  
1/4" shaft.  
Equip (Bourman 3540S, Beckman 7256)  
Dials to suit 16-1-11, 18-1-11, 21-1-11  
R14050 50R R14100 5K  
R14055 100R R14110 20K  
R14060 200R R14120 20K  
R14070 500R R14130 50K  
R14080 1K R14140 100K  
R14090 2K  
1-9 10+  
\$13.50 \$12.50



### NICADS!

Save a fortune on expensive throw away batteries with these quality Nicads and Rechargers!  
Size Desc. 1-9 10+ 100+  
AA 450 mA.H. \$2.95 \$2.75 \$2.50  
C 1.2 A.H. \$9.95 \$9.50 \$8.95  
D 1.2 A.H. \$9.95 \$9.50 \$8.95



### COMPUTER CABLE

CIC6 6 conductor computer interface cable. Colour coded with braided shield (to IE422 specifications). Copper conductor 6 x 7/0.16mm. 1-9 metres 10+ metres  
\$1.90/m \$1.70/m

CIC9 100 9 conductor computer interface cable. Colour coded with mylar shielding. 9 x 7/0.16mm. 1-9 metres 10+ metres  
\$2.50/m \$1.95/m

CIC12 12 conductor computer interface cable. Colour coded with mylar shielding. 12 x 7/0.16mm. 1-9 metres 10+ metres  
\$2.70/m \$2.50/m

CIC16 16 conductor computer interface cable. Colour coded with mylar shielding. 16 x 7/0.16mm. 1-9 metres 10+ metres  
\$3.90/m \$3.40/m

CIC25 25 conductor computer interface cable. Colour coded with mylar shielding. 25 x 7/0.16mm. 1-9 metres 10+ metres  
\$4.90/m \$4.40/m

### QUALITY LEDS

Cat. No.	Description	Price
Z10140	3mm Red	\$0.15
Z10141	3mm Green	\$0.20
Z10143	3mm Yellow	\$0.20
Z10145	3mm Orange	\$0.20
Z10150	5mm Red	\$0.15
Z10151	5mm Green	\$0.20
Z10152	5mm Yellow	\$0.20



### SOLDER BRAID

1.5 metres of specially treated braid for removing solder from PCB's etc. Simply place the braid against the solder and apply the soldering iron. The melted solder is drawn up into the braid!  
T11320 1.5 metres ..... \$1.95



### CENTRONICS PLUG SPECIAL!

36 WAY MALE (P12200)	1-9	10+	100+
	\$3.95	\$3.50	\$3.00



### VOLTAGE REGULATORS BARGAINS

Description	1-9	10+
7805UC	\$0.60	\$0.50
7812UC	\$0.60	\$0.50
7905UC	\$0.60	\$0.50
7912UC	\$0.60	\$0.50




### DB25 CONNECTOR SPECIALS!

We have just imported 50,000. So you get to save a small fortune!

DB25 MALE (P10900)	1-9	10+	100+
	\$1.00	\$0.90	\$0.80

DB25 FEMALE (P10901)	1-9	10+	100+
	\$1.20	\$1.00	\$0.90



### ELECTROLYTICS (PCB MOUNTING)


Cat.No.	Description	1-9	10+
R15461	10uF	\$0.25	\$0.20
R15481	22uF	\$0.25	\$0.20
R15511	33uF	\$0.25	\$0.20
R15521	47uF	\$0.25	\$0.20
R15531	100uF	\$0.30	\$0.25
R15541	220uF	\$0.60	\$0.50
R15551	330uF	\$0.75	\$0.65
R15561	470uF	\$0.75	\$0.65
R15571	60uF	\$0.90	\$0.80
R15581	1000uF	\$0.90	\$0.80
R15601	2200/2500uF	\$1.20	\$1.10

Cat.No.	Description	1-9	10+
R15422	2.2uF	\$0.25	\$0.20
R15432	3.3uF	\$0.25	\$0.20
R15442	4.7uF	\$0.25	\$0.20
R15462	10uF	\$0.25	\$0.20
R15502	25uF	\$0.30	\$0.25
R15512	33uF	\$0.30	\$0.25
R15522	47uF	\$0.30	\$0.25
R15532	100uF	\$0.40	\$0.35
R15542	220uF	\$0.70	\$0.65
R15552	330uF	\$0.75	\$0.65
R15562	470uF	\$0.75	\$0.65
R15582	1000uF	\$1.00	\$0.90
R15602	2200/2500uF	\$1.40	\$1.20

Cat.No.	Description	1-9	10+
R15443	4.7uF	\$0.30	\$0.25
R15463	10uF	\$0.30	\$0.25
R15483	22uF	\$0.30	\$0.25
R15513	33uF	\$0.40	\$0.35
R15523	47uF	\$0.40	\$0.35
R15533	100uF	\$0.60	\$0.55
R15543	220uF	\$0.60	\$0.55
R15563	470uF	\$0.70	\$0.60
R15583	1000uF	\$1.20	\$1.10
R15593	2200/2500uF	\$1.50	\$1.30


Cat.No.	Description	1-9	10+
R15404	0.47uF	\$0.25	\$0.22
R15414	1uF	\$0.25	\$0.22
R15424	2.2uF	\$0.30	\$0.25
R15434	3.3uF	\$0.30	\$0.25
R15444	4.7uF	\$0.40	\$0.35
R15464	10uF	\$0.40	\$0.35
R15484	22uF	\$0.40	\$0.35
R15514	33uF	\$0.40	\$0.35
R15524	47uF	\$0.50	\$0.45
R15534	100uF	\$0.60	\$0.55
R15544	220uF	\$0.90	\$0.80
R15564	470uF	\$1.00	\$0.90

Cat.No.	Description	1-9	10+
R15405	0.47uF	\$0.30	\$0.25
R15415	1uF	\$0.30	\$0.25
R15425	2.2uF	\$0.30	\$0.25
R15435	3.3uF	\$0.30	\$0.25
R15445	4.7uF	\$0.40	\$0.35
R15465	10uF	\$0.40	\$0.35
R15505	25uF	\$0.50	\$0.45
R15525	47uF	\$0.50	\$0.45
R15535	100uF	\$0.60	\$0.55
R15545	220uF	\$0.90	\$0.80
R15555	330uF	\$1.20	\$1.10
R15565	470uF	\$1.40	\$1.20



### FREE STANDING, FOLD UP MAGNIFIER

An economically priced "hands free" magnifier, lets you take care of all those tricky fine detailed jobs so often encountered in electronics, or any of many other practical uses such as home, work, hobbies etc.  
Cat. T10020 Normally \$14.95  
SPECIAL, ONLY \$12.95



### ANTISTATIC SOLDER SUCKER

• Light weight  
• Sturdy construction  
• Easy to remove tip  
• Excellent value for money!  
Cat. T11261 ..... \$13.95



### MINIATURE HOBBY VICE

• Lever operated custom grip base for instant mounting and portability  
• Mounts on smooth non-porous surfaces  
• Ideal for holding components, and other small/light objects  
Cat. T12458 ..... only \$5.45




### CODE KEY PAD

• Telephone type digital keypad  
• Four digit, changeable code  
• Over 5000 possible combinations  
• Power consumption: 5mA standby, 50mA alarm  
• Two sector LED and 1 arm LED  
• Wrong number lockout  
• 12V DC operation  
• Relay output  
• Panic button  
• Normally open tamper switch  
• Dimensions: 145 x 100 x 37mm  
• ACP3 compatible  
Cat. A13014 ..... R.R.P. \$79.95  
SPECIAL, ONLY \$69.95



### CANNON TYPE CONNECTORS SPECIALS

Cat. No.	Description	Price
P10960	3 pin line male	Was \$3.90 NOW \$2.90
P10962	3 pin chassis male	Was \$3.00 NOW \$2.40
P10964	3 pin line female	Was \$4.50 NOW \$3.25
P10966	3 pin chassis female	Was \$4.95 NOW \$3.45

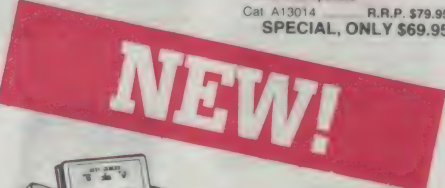


### RS232 FAST CABLER

Makes RS232 interface configuring fast and simple. 3 slide switches enable line swapping functions, positive and negative voltages are displayed on 6 tricolour LED's.

**SPECIFICATIONS:**  
Connector: DB25 plug on 100mm cable and DB25 socket on 100mm cable  
Indicators: Tricolour LED's for pins 2(TD), 3(RD), 4(RTS), 5(CTS), 6(DSR), 20(DTR)  
Switches: 3 Slide switches to swap leads  
Power: Interface power  
Enclosure: Black, high impact plastic  
Dimensions: 85 x 95 x 30mm  
X15710 ..... \$145


### AUTOMATIC CABLE STRIPPER

• Strips cable with diameter of 1 1/4 2 2/3 3 2mm  
• Fully automatic action. Squeeze grip will simultaneously strip and eject insulation  
• Length 180mm (7")  
T11532 ..... \$19.95



### 42mm PIEZO BUZZER

S15073 ..... \$7.95



### 1/2" HIGH INTENSITY RED LED DISPLAYS


(Available in Common Cathode and Common Anode)

**Dimensions:**  
Overall: 12.7mm across, 19mm high  
Display: 12.7mm(H) x 7.3mm(W)  
Segment Width: 1.2mm  
Brightness: 3400 ucd, I<sub>b</sub> = 10mA

**COMMON CATHODE:**  
Pin 1 Segment E Pin 6 Segment B  
Pin 2 Segment D Pin 7 Segment A  
Pin 3 CC Pin 8 CC  
Pin 4 Segment C Pin 9 Segment F  
Pin 5 Segment G Pin 10 Segment G  
Cat.No. 1-9 10+ 100+  
Z10190 \$1.95 \$1.75 \$1.50

### HIGH INTENSITY RED LED BAR GRAPH

**Dimensions:**  
Overall: 63mm across, 5mm high  
LEDs: 10 x 5mm x 1mm  
Cat.No. 1-9 10+  
Z10180 \$2.95 \$2.75



### COMMODORE EDGE CONNECTOR

156" spacing, 12/24 contacts  
Cat.No. 1-9 10+  
P10973 \$5.95 \$4.95



### BRIDGE SPECIALS

1-9	10+	100+
W02 1A 200V Cat. Z11030	\$0.30	\$0.28
W04 1A 400V Cat. Z11032	\$0.35	\$0.30
SB804 6A 400V Cat. Z11034	\$0.90	\$0.80
	\$0.75	




### SPECTROL 64Y MULTI TURN TRIMPOTS

Cat No Description 1-9 10+  
R14700 10R \$3.50 \$3.20  
R14710 20R \$3.50 \$3.20  
R14720 50R \$3.50 \$3.20  
R14730 100R \$3.50 \$3.20  
R14740 200R \$3.50 \$3.20  
R14750 500R \$3.50 \$3.20  
R14760 1K \$3.50 \$3.20  
R14770 2K \$3.50 \$3.20  
R14780 5K \$3.50 \$3.20  
R14790 10K \$3.50 \$3.20  
R14800 20K \$3.50 \$3.20  
R14810 50K \$3.50 \$3.20  
R14820 100K \$3.50 \$3.20  
R14830 200K \$3.50 \$3.20  
R14840 500K \$3.50 \$3.20  
R14850 1M \$3.50 \$3.20

### 10 AMP RELAY

S.P.D.T. 12V Coil, 240V (S14114)  
1-9 10+ 100+  
\$4.95 \$3.95 \$3.75



### RCA GOLD PLATED PLUGS AND SOCKETS

For those who need the ultimate in connection. Essential for laser disc players to get that fantastic sound quality  
Plug Cat. P10151 ..... \$3.75  
Socket Cat. P10150 ..... \$2.95

### RCA GOLD PLATED CHASSIS SOCKET

For the ultimate connection!  
Cat. P10229 ..... Normally \$1.95  
1-9 10+ 100+  
\$1.00 \$0.90 \$0.85




### MINI PARTS CASE

Features a clear plastic lid for easy identification of contents. Up to five, adjustable lower compartments, plus a self elevating upper tray for smaller items  
Dimensions: 110 x 210 x 43mm  
Cat. H10087 ..... \$9.95



### SPRING RETURN TOGGLE SWITCHES

	Was	Now
S.P.D.T. Cat. S11012	\$2.25	\$1.95
D.P.D.T. Cat. S11022	\$2.50	\$2.25



### Rod Irving Electronics

48 A Beckett St. MELBOURNE  
Phone (03) 563 6151  
425 High St. NORTHCOLE  
Phone (03) 489 8866  
Mail Order and Correspondence!  
P.O. Box 620, CLAYTON 3168  
Telex: AA 161938  
Fax: (03) 543 2648



### MAIL ORDER HOTLINE 008 335757 (TOLL FREE)

(STRICTLY ORDERS ONLY)

### LOCAL ORDERS & INQUIRIES (03) 543 7877

### POSTAGE RATES

\$25	\$4.00	\$4.00
\$50	\$5.00	\$5.00
\$100	\$7.50	\$7.50
\$200	\$10.00	\$10.00
\$500 plus	\$12.50	\$12.50





### CP/M PROGRAMMER'S ENCYCLOPEDIA

**-Bruce Brigham**  
The CP/M Programmer's Encyclopedia is a time saving, comprehensive reference for serious CP/M users. Covering all the commands and syntaxes for CP/M 2.x and CP/M 3.0, this encyclopedia gives you the information you need in an easy-to-use format especially designed for programmers. The CP/M Programmer's Encyclopedia is the only major compilation of CP/M commands and syntaxes. If you use CP/M extensively, you should not be without this important reference guide.

Cat.B ..... \$39.95



### THE PLAIN ENGLISH MAINTENANCE & REPAIR GUIDE FOR IBM PC's

**-Henry F. Beechhold**  
Even if you've never held a soldering gun in your hand you'll appreciate these clear, simple, witty explanations of computer electronics. With its lucid line drawings and diagrams, this book gives you expert instructions on every fix-up and keep-up operation for your IBM PC and its components - DOS, peripherals, disk drive, and the rest.


B20080 ..... \$53.95



### THE C PROGRAMMER'S HANDBOOK

**-Thom Hogan**  
While other books will tell you how to learn C, this one shows you how to use it. It's a literal encyclopedia of the information you'll need to get it to work for you, efficiently and effectively. Handy and well organized, it gives you quick access to the things you need, when you need them, plus a clear definition of C language with examples and explanations of restrictions and defaults. You won't find an approach this understandable and objective anywhere else.

B20120 ..... \$39.95



### BASIC COMMODORE 64 BASIC

**-James S. Coan**  
Here's the key to using and enjoying the Commodore 64 microcomputer. A fast reading guide to computer operation and BASIC programming that is suitable for use at home or in the classroom. The approach is simple and direct.

Cat.B ..... \$29.50



### IBM PC TROUBLESHOOTING & REPAIR GUIDE

**-Robert C. Brenner**  
Keep your IBM PC in top operating condition with this handy reference book. Inside you will find pages of schematics, photos and block diagrams to help you identify problems. Simple instructions tell you what's wrong and how to fix it fast.

- Make most repairs with few or no tools
- Quickly zero-in on a malfunctioning component
- Reduces downtime
- Pays for itself many times over in repair savings
- Easy to understand circuit diagrams

The IBM PC Trouble Shooting & Repair Guide will make even the computer novice feel comfortable with the complex world of electronic trouble shooting. This fully illustrated book is recommended for anyone who uses an IBM PC.

Cat.B ..... \$44.95




### UNDERSTANDING UNIX

**-James R. Groff, Paul N. Weinberg**  
The exploding popularity of the UNIX operating system is one of the most important trends in computing in the 1980's. UNIX is available on hundreds of different computers, ranging from personal computers to mainframes and supercomputers. Understanding UNIX offers an overall perspective on UNIX, including a discussion of where UNIX fits in the worlds of computing, business, and education. Individual chapters address the UNIX structure, file system, multiuser capability, specific applications tools, and more.

"A book that balances scope with depth; comprehensiveness with brevity." -Alan Kaplan

Cat.B21240 ..... \$44.95




### APPLE II CIRCUIT DESCRIPTION

**-Winston D. Gayler**  
• Covers all Apple II motherboard and keyboard versions  
• Helps you learn about microcomputer hardware in general and Apple II hardware in detail

- Provides you with accurate schematics and verified waveforms to rely on for servicing and repair
- Explains the advanced concepts of daisy chains, interrupts, direct memory access, and the ready line
- Gives you many valuable hints for successful interfacing
- Contains tutorials on video signals, memory IC's and the 6502 microprocessor, as well as full explanations of advanced concepts

Each chapter contains an overview for the beginner and a detailed section for the more adventurous. Ideal for students, technicians, hobbyists, engineers, and others who need Apple II technical information

Cat.B ..... \$52.95



### INSIDE THE IBM PC

**-Peter Norton**  
The widely acclaimed guide to the IBM PC's inner workings. The latest edition now covers every model of the IBM micro: PC, XT and AT, and every version of DOS from 1.1 to 3.0


B20080 ..... \$44.95



### PASCAL PRIMER

**-Mitchell Waite, David Fox**  
If you are learning programming or have dabbled in the popular language BASIC and wish to learn the capabilities of Pascal, this book is definitely written for you. Written and illustrated with a touch of humour, the informative text describes Pascal program structure, Pascal variables, Pascal procedures, and many other features. There are chapters on decision making statements, numeric functions, string functions, arrays and sets, and much more. The eight appendices present facts about the advantages and disadvantages of Pascal, components of a Pascal system, interfacing assembly language routines, and other useful information

Cat.B21120 ..... \$34.95



### "C" SELF STUDY GUIDE

**-Jack Purdum**  
Learn at your own pace as this self directed study guide takes you through the basics and into advanced areas of the C programming language. The unique format allows you to advance quickly or proceed slowly. The book is divided into two parts

**Questions:** of varying degrees of difficulty to guide beginners over the rough spots and to challenge the more experienced C programmers.  
**Answers:** that include many complete programs for testing new functions and for illustrating tips, traps, techniques and short cuts


Cat.B20690 ..... \$37.95



### HANDS ON

**Practical tips and useful programs for IBM PC's from the editors of PC World**  
A collection of the best tips, programs, and routines for IBM computers from the popular "Hands on" and "Columns" columns. Covering both hardware and software, the book is organised so that you can quickly find information on virtually everything you need to know.

B20100 ..... \$34.95



### SAMSUNG TTL 12" MONITOR

- High contrast, non-glare screen
- Excellent value for money!

#### SPECIFICATIONS:

**Picture tube:** 12" diagonal 90° deflection

**Mode:** TTL

**TTL input signal:**

**Polarity:** TTL Positive

**Level:** 4V p-p ± 1.5V

**Impedance:** 75ohm

**Video bandwidth:** 16MHz (-3dB)

**Scanning frequency:**

**Horizontal:** 18.432 ± 0.1KHz

**Vertical:** 50Hz ± 0.5%

**Active display area:** 216(H) x 160(V)mm

**Display character:** 80 characters x 25 lines

**Input connector:** 9 pin connector

**Controls:**

**Front:** Power ON/OFF, Contrast

**Rear:** V-Hold, V-Size, Brightness

**Internal:** Vertical Linearity

**Horizontal Linearity, Horizontal Width, Focus**

**Power supply:** 110/120V 60Hz, 220/240V 50Hz

**Dimensions:**

**308(W) x 297(H) x 307(L)mm**

**Weight:** 7.3Kg

**Shipping weight:** 8.3Kg

Cat.No. Description Price

X14500 (GREEN) \$189

X14502 (AMBER) \$189



### SAMSUNG 12" TTL/COMPOSITE MONITOR

#### FEATURES...

- At least a monitor with both TTL and Composite modes!
- High contrast, non-glare screen
- High resolution, 80 or 40 character display
- Swivel/Tilt base

#### SPECIFICATIONS...

**Picture tube:** 12" diagonal and 90° deflection

**Phosphor:** Green (P42)

**Video input signal:** Composite/TTL

**Switchable**

**Polarity:** Negative/Positive

**Level:** 0.5-2.0Vp-p 0.4-1.5Vp-p

**Impedance:** 75ohm, more than 6.8K ohm

**Scanning frequency:**

**Horizontal:** 15.75 KHz

**Vertical:** 47-63Hz

**Video bandwidth:** 20MHz

**Active display area:** Composite: 206(H) x 160(V)mm

**TTL: 216(H) x 160(V)mm**

**Display character:** 80 characters x 25 rows

**Input terminal:** Photo Pin Jack, 9 pin D-Sub Connector

**Controls:**

**Outside:** Power Switch, Contrast, Brightness, Signal Select, V-Hold, V-Size

**Inside:** H-Width, H/V linearity, Focus, H/V-Shift

**Power supply:** 110/120V 60Hz, 220/240V 50Hz

**Dimensions:**


**308(W) x 297(H) x 307(L)mm**

**Weight:** 7.3 Kg

**Shipping weight:** 8.3 Kg

Cat.No. Description Price

X14509 (GREEN) \$239



### SAMSUNG 12" FLAT SCREEN COMPOSITE MONITOR

#### FEATURES...

- Flat, high contrast, non-glare screen
- High resolution, 80 or 40 character display
- Tilt/swivel base
- Compatible with Apple\* and IBM\* colour composite signal

#### SPECIFICATIONS...

**Picture tube:** 12" diagonal and 90° deflection

**Phosphor:** Available in Green or Amber

**Video input signal:** Composite Signal

**Polarity:** Negative Sync

**Level:** 0.5-2.0Vp-p

**Impedance:** 75ohm

**Scanning frequency:**

**Horizontal:** 15.734 KHz ± 0.1%

**Vertical:** 50-60Hz

**Video bandwidth:** 20MHz

**Active display area:** 216(H) x 160(V)mm

**Display character:** 80 character x 24 rows

**Input terminal:** RCA Photo Jack

**Controls:**

**Outside:** Power Switch, Contrast, Brightness, H-Shift, V-Size

**Inside:** H-Width, H/V hold, H/V linearity, Focus

**Power supply:** 110/120V 60Hz, 220/240V 50Hz

**Dimensions:**

**310(W) x 307(H) x 300(L)mm**

**Weight:** 8.1 Kg

**Shipping weight:** 9.6 Kg

Cat.No. Description Price

X14510 (GREEN) \$249

X14512 (AMBER) \$249




### ANTI GLARE SCREEN

Half the price of other brands!!

Relieve eye strain and headaches and increase productivity with these Anti Glare Screens. Suitable for 12" monochrome

Cat. X99995 ..... \$24.95



### 2 & 4 WAY RS232 DATA TRANSFER SWITCHES

If you have two or four compatible devices that need to share a third or fifth, then these inexpensive data transfer switches will save you the time and hassle of constantly changing cables and leads around

- No power required
- Speed and code transparent
- Two/Four position rotary switch on front panel
- Three/Five interface connections on rear panel
- Switch comes standard with female connector

2 WAY Cat.X19120 only \$59

4 WAY Cat.X19125 only \$79


### 2 & 4 WAY CENTRONICS DATA TRANSFER SWITCHES

Save time and hassles of constantly changing cables and leads around with these inexpensive data transfer switches. These data switches support the 36 pin centronic interface used by Centronics, Printronics, Data Products, Epson, Micronics, Star, and many other printer manufacturers

- No power required
- Speed and code transparent
- Two/Four position rotary switch on front panel
- Three/Five interface connections on rear panel
- Switch comes standard with female connector
- Bale locks are standard

2 WAY (X19130) ..... only \$59

4 WAY (X19135) ..... only \$79



### SUPER 5 EP-1201 DOT MATRIX PRINTER

120 C.P.S.

• Pica or Elite character set

• Print Modes: NLQ, Dot Graphics, Proportional Font, Draft

• Proportional Printing

• Reliable and Compact

• Proportional Printing

• Logic Seeking

• 1K Printer Buffer

Cat.C20035 ..... only \$595

### IBM\* XT COMPATIBLE CARDS

NEW! NEW! NEW! NEW!

**20M-BYTE HARD DISK CARD**  
XT compatible, simply plugs straight in to your computer!

Cat.X20020 ..... \$1,095

**Colour Graphics Card**

Cat.X18002 ..... \$109

**Mono Graphics/Printer Card**

(Hercules compatible)

Cat.X18003 ..... \$119

**Floppy Disk Drive Controller Card**

(2 Drives, 16 Bit)

Cat.X18005 ..... \$52

**Floppy Disk Drive Controller Card**

(4 Drives, 16 Bit)

Cat.X18006 ..... \$57

**High Resolution Mono Card**

Cat.X18007 ..... \$199

**Colour Graphics & Printer Card**

Cat.X18010 ..... \$119

**768KB RAM Card (without memory)**

Cat.X18012 ..... \$79

**Printer Card**

Cat.X18017 ..... \$34.95

**Game I/O Card**

Cat.X18019 ..... \$37.95

**XT Motherboard 4.77MHz**

Cat.X18020 (without memory) \$189

**XT Turbo Motherboard 8MHz**

Cat.X18030 (without memory) \$199

**Clock Card**

Cat.X18024 ..... \$57.50

**RS232 Card (without cable)**

Cat.X18026 ..... \$52.50

**RS232 & Clock Card**

Cat.X18028 ..... \$95

**Multi I/O & Disk Controller Card**

Cat.X18040 ..... \$169

**I/O Plus Card**

Cat.X18045 ..... \$129

**768K Multifunction I/O Card**

(includes cable but not 41256 RAM)

Cat.X18050 ..... \$199

**Hard Disk Controller Card**

Cat.X18060 ..... \$195

**Enhanced Graphics Adaptor Card**

(Award Bios)

Cat.X18070 ..... \$295

**64K Printer Buffer Card**

Cat. .... \$139


**(AT COMPATIBLE)**

**Enhanced Graphics Adaptor Card**

(Award Bios)

Cat.X ..... \$495





## IBM\* XT\* COMPATIBLE COMPUTERS \$795\*

Check these features and our prices. We're sure you'll agree they're exceptional value for money!

- Assembled in Australia!
- Tested by us for 24 hours prior to delivery!
- 150W power supply
- AT\* style keyboard
- 8 Slot motherboard
- 6 months warranty!

(Japanese drives available for an extra \$50 each)  
(Switchable 4-77/8MHz Turbo versions available for an extra \$50)

### \*\$795 COMPATIBLE COMPUTER

256K RAM Single Drive, Graphics and Disk Controller Card. \$795

### 256K RAM COMPATIBLE COMPUTER

2 x 360K Disk Drives, Multifunction Card, Colour Graphics, Disk Controller, 1 Parallel Port. (Includes Timer Disk). \$1,095

### 640K RAM COMPATIBLE COMPUTER

2 x 360K Disk Drives, Multifunction Card, Colour Graphics, Disk Controller, 1 Serial, 1 Parallel Port. (Includes Timer Disk). \$1,150

### 20 M/Byte HARD DISK COMPATIBLE COMPUTER

20 M/Byte Hard Disk, 360K Disk Drive, 1 Serial, 1 Parallel Port. (Includes Timer Disk)

Single 360K Floppy Disk Drive ..... only \$1,750  
Dual 360K Floppy Disk Drives ..... only \$1,895

## IBM\* AT\* COMPATIBLE \$2,795

Assembled & Tested in Australia!


- 1 M/Byte Main Board
- 1.2 M/Byte Floppy Disk Drive
- Colour Graphics Display Card
- Floppy & Hard Disk Controller
- Printer Card and RS232
- 200W Power Supply
- 6 MHz
- 80286 CPU
- 8 Slots
- 20 M/Byte Hard Disk
- Keyboard
- 6 Months Warranty

only \$2,795

## IBM\* BABY AT\* COMPATIBLE .. \$2,595

- 1 M/Byte Main Board
- 1.2 M/Byte Floppy Disk Drive
- Colour Graphics Display Card
- Floppy & Hard Disk Controller
- Printer Card and RS232
- 200W Power Supply
- Switchable 8/10/12 MHz
- 80286 CPU
- 8 Slots
- 20 M/Byte Hard Disk
- Keyboard
- 6 Months Warranty

Dimensions: 360(W) x 175(H) x 405(D)mm



### SWIVEL BASE

Make life easier with these quality, swivel and tilt bases, complete with rubber fittings!

Cat.D11100 ..... Special, \$19.95



### RS232 BREAK OUT BOX

A simple way of monitoring RS232 interface lead activity. Interface powered, pocket size for circuit testing, monitoring and patching 10 signal powered LED's and 2 spares. 24 switches enables you to break out circuits or reconfigure and patch any or all the 24 active positions.

**SPECIFICATIONS:**  
Connectors: DB25 plug on 80mm ribbon cable and DB25 socket plastic.  
Indicators: Tricolour LED's for TD, RD, RTS, CTS, DSR, CD, TC, RC, DTR, (E)TC.  
Jumper Wires: 20 tinned end pieces  
Power: Interface power  
Enclosure: Black, high impact plastic.  
Dimensions: 85 x 95 x 30mm

X15700 ..... \$94.95



### APPLE\* COMPATIBLE JOYSTICK

Ideal for games or word processing. Fits most 6502 "compatible" computers.


Cat. C14200 ..... \$39.95



## VERBATIM DISK SPECIALS!

All prices 10 disk boxes!

Description	1-9 boxes	10+ boxes
5 1/4" 1S/2D .....	\$24.95	\$22.50
5 1/4" 2S/2D .....	\$29.95	\$28.50
5 1/4" 2S/4D .....	\$75.00	\$70.00
5 1/4" 2S/HD .....	\$44.95	\$42.95
3 1/2" 1S/2D .....	\$47.50	\$46.50
3 1/2" 2S/2D .....	\$49.50	\$48.50



### 5 1/4" DISK STORAGE

Efficient and practical. Protect your disks from being damaged or lost!

- 70 disk capacity
- Smoked plastic cover
- Lockable (2 keys supplied)
- Dividers/spacers

Cat. C16025 ..... only \$14.95




### 3 1/2" DISK STORAGE UNIT

- Holds up to 40 x 3 1/2" diskettes.
- Lockable (2 keys supplied)
- High impact plastic lid and base

Cat. C16035 ..... only \$14.95



MAIL ORDER HOTLINE 008 335757 (TOLL FREE) LOCAL: 543 7877



BARGAIN!

### PRINTER RIBBONS

CP80, BX80, DP80, BX100, MB100  
ALL A CRAZY LOW \$9.95


### PRINTER RIBBONS TO SUIT EPSON MODELS...

MX100, FX100, RX100 (Cat. C22002) ..... \$19.95  
MX70/80, FX70/80, RX70/80 (Cat. C22031) ..... \$10.95



### COMPUTER PAPER

Quality paper at a low price! 2,500 sheets of 60 gsm bond paper.  
Cat. C21003 11 x 9 1/2" ..... \$49.95  
Cat. C21005 15 x 11" ..... \$67.95



### NEC DISK DRIVES

#### 3 1/2" DISK DRIVE

- 1 M/Byte unformatted, (640K formatted).
- Double sided, double density.
- Access Time 3m/sec

Cat. C11906 ..... \$265

#### 5 1/4" SLIMLINE

- Switchable 1.6 M/Byte to 1 M/Byte unformatted
- 1.2 M/Byte to 720K formatted
- Double sided, double density.
- AT compatible

Cat. C11906 ..... \$295

#### 8" SLIMLINE

- Double sided, double density.
- 1.6 M/Byte unformatted


Cat. C11908 ..... \$795



### PRICE BREAK THROUGH!

### 20 M/Byte HARD DISK DRIVE FOR IBM\* AND COMPATIBLES

Tandon drive with controller card  
Cat. X20010 ..... WAS \$750  
SPECIAL, ONLY \$695  
\*IBM is a registered trade mark.




### APPLE\* COMPATIBLE SLIMLINE DISK DRIVE

Compatible with Apple 2+  
Cat. X19901 ..... Normally \$225  
SPECIAL \$179

### APPLE\* IIC COMPATIBLE DISK DRIVE


(including cable ..... only \$199  
(\*Apple is a registered trade mark.)



### CANON A-50 PRINTER

- Serial Impact Dot Matrix
- 180 C.P.S
- Near Letter Quality Mode
- 1.4K Buffer


Cat. C20045 ..... \$595



### SENDATA DIRECT CONNECT MODEM

- CCITT V21 300 baud full duplex
- CCITT V23 1200/75
- Bell 103 300 Full duplex
- Bell 202 1200 Half duplex
- Auto answer, auto disconnect
- LED display for Power, TX, RX, CD
- AC power adaptor included
- DB25 pin connector
- Telecom Approval N° C83/37/1045

Cat. X19120 ..... \$295  
(SOFTWARE FOR VATEL ..... \$95)



## "NO FRILLS" DISKS!!

Now you can buy absolute top quality disks that are also the cheapest in Australia! They even come with a 5 year guarantee, which indicates the quality of these disks. So why pay 2-3 times the price for the same quality?

Bulked packed, D/S D/D without boxes, or brand name, just their white paper jacket, index labels and write protects.

## 5 1/4" D/S "NO FRILLS" DISKS FROM \$0.85 EACH!!


1-9 PACKS	10+ PACKS	100+ PACKS
\$10 <sup>ea</sup>	\$9 <sup>ea</sup>	\$8.50 <sup>ea</sup>

(SEND \$2 FOR SAMPLE DISK!)  
(TAX EXEMPT PRICES LESS \$1 PER PACK)

## 3 1/2" "NO FRILLS" DISKS!

1-9 PACKS	100+ PACKS	100+ PACKS
\$35 (PER PACK)	\$34 (PER PACK)	\$32 (PER PACK)

(SEND \$5 FOR SAMPLE DISK!)  
(TAX EXEMPT PRICES LESS \$4 PER PACK)



### SAMSUNG 12" 20MHz COMPOSITE MONITOR ONLY \$149

- FEATURES.....
- High contrast, non-glare screen
- High resolution, 80 or 40 character display

### SPECIFICATIONS.....

Picture tube: 12" diagonal and 90° deflection  
Phosphor: Available in Green (P39) or Amber  
Video input signal: Composite Signal  
Polarity: Negative Sync  
Level: 0.5V-2.0Vp-p  
Scanning frequency: Horizontal: 15.734 KHz & -0.1%  
Vertical: 60Hz  
Video bandwidth: 20MHz  
Active display area: 216(H) x 160(V)mm  
Display character: 80 characters x 25 rows  
Input terminal: RCA Phono Jack  
Controls:  
Outside: Power Switch, Contrast, Brightness, H-Shift, V-Size.  
Inside: H-Width, H/V hold, H/V linearity, Focus  
Power supply: 110/120V 60Hz, 220/240V 50Hz  
Dimensions: 308(W) x 307(H) x 297(L)mm  
Weight: 7.3 Kg  
Shipping weight: 8.3 Kg  
Cat No. Description Price  
X14514 (GREEN) \$149  
X14516 (AMBER) \$149



### CENTRONICS GENDER CHANGERS

- Female to Female
- Saves modifying or replacing non-mating Centronics cables.
- All 36 pins wired straight through
- Cat. X15663 Male to Male
- Cat. X15661 Male to Female
- Cat. X15664 Female to Female

Normally \$33.95, Only \$24.95



### Rod Irving Electronics

48 A Beckett St, MELBOURNE  
Phone (03) 663 6151

425 High St, NORTHCOLE  
Phone (03) 499 8866

Mail Order and Correspondence  
P.O. Box 620, CLAYTON 3168

Telex: AA 151938  
Fax: (03) 543 2648



### MAIL ORDER HOTLINE 008 335757 (TOLL FREE)

(STRICTLY ORDERS ONLY)

### LOCAL ORDERS & INQUIRIES (03) 543 7877

### POSTAGE RATES

\$1	\$2.00
\$10	\$24.99
\$20	\$49.99
\$25	\$59.99
\$50	\$99.99
\$100	\$199.99
\$200	\$499.99
\$500 plus	\$1250.00

The above postage rates are for basic postage only. Road Freight, bulky and fragile items will be charged at different rates.

All sales tax exempt orders and wholesale inquiries to RITRONICS WHOLESALE, 56 Renner Rd, Clayton Ph. (03) 543 2166 (3 lines).

Errors and omissions excepted IBM, PC, XT, AT, are registered trademarks of International Business Machines. Apple is a registered trademark. \*Devices registered trademarks of their respective owners.





# News Highlights

## Aust team makes historic pulsar discovery

The first pulsar in the Small Magellanic Cloud, one of the closest galaxies to our own Milky Way galaxy, has been discovered by an Australian research team which includes Dr Peter Hall, Lecturer in Electrical Engineering at the University of Sydney.

Dr Hall, with colleagues from the University of Tasmania and CSIRO, also discovered the only other two pulsars (pulsating cosmic radio sources) known outside the Milky Way. They were found in the large Magellanic Cloud galaxy and were first detected by the team about three years ago. Both the Large and Small Magellanic galaxies lie about 200,000 light years away from the centre of the Milky Way.

Pulsars are thought to be rotating, magnetised, neutron stars which emit radio frequency energy in narrow beams. As the star rotates its radio frequency emission beam intersects the line of sight of an earth bound observer, causing a pulse to be received.

"Neutron stars are 'black stars' — that is they do not emit visible light," Dr Hall said. "These peculiar objects are thought to originate in supernovae: the catastrophic explosions which occur when some stars reach the end of their



**Dr Peter Hall, member of the team which discovered the new pulsar.**

life. A neutron star is presumed to be the core of an exploded parent star and, in spite of being as massive as the sun, is only about 10kms in diameter. The resulting density is greater than that in any other known object, apart from a black hole."

The behaviour of atoms and molecules on neutron stars is quite different to that on earth, and the stars are of immense interest to scientists who use the properties of pulsar radiation to help establish the physics of neutron stars.

The discovery of the three pulsars

outside the Milky Way will also be used to probe the medium between Earth and the pulsar. "Because it emits regular 'blips' it is like having a test generator on the other side of the test range," Dr Hall said. "In this case that means in another galaxy. By studying what happens to the radiation as it travels from that 'generator' through space we can look at the properties of the interstellar medium and the intergalactic environment.

The team discovered all three pulsars using the CSIRO 64m diameter radio telescope at Parkes in central western New South Wales. Four hundred pulsars have been found in the Milky Way since the first pulsar was discovered by a Cambridge researcher in 1968. Pulsars outside the Milky Way are much harder to find, however.

The team recorded data over a two week period for up to twelve hours a day at the observatory. The data were then fed into a computer with a specially designed, sophisticated signal processing software package which enabled the computer to search for the pulsar signals, which are buried deep in noise background.

"Confirmation of the third pulsar popped out of the computer at three o'clock on a Sunday morning," Dr Hall said. "Usually we then reobserve and reconfirm, but with the third pulsar it was so strong that it was clearly a real object."

Having found the three pulsars the team was now busy "dreaming up sophisticated experiments to make some physical use of the pulsars," Dr Hall said.

## World's largest CRT monitor

Mitsubishi Electric has announced the release of the largest CRT colour video monitor yet produced, with a screen measuring 92.5mm (37") on the diagonal.

The XC-3710/XC-3720 provides a display equal to a double-page spread of a tabloid newspaper, making it especially suited for CAD and display of computer information to large groups of people. As a result of the use of a CRT rather than projection techniques, the display is considerably brighter and sharper than conventional large-screen displays.

An autotracking (multi-scan) feature provides compatibility with any computer system with vertical scanning in the range 40 — 75Hz, and horizontal



scanning between 15.0 and 31.5kHz. This also gives it compatibility with most video sources and systems. An optional intelligent graphics controller module gives the monitor the ability to

generate graphics locally in response to 81 different primitive commands.

Further information from Mitsubishi Electric, 73 Epping Road, North Ryde 2113.



## New Canon colour laser copier can copy slides, blow up 400%

The new Canon Colour Laser Copier is said to combine the high resolution, low running costs and fast speed of plain-paper output with the faithful colour reproduction and almost unlimited image-editing possibilities of digital input. Once the image has been scanned and before it is printed, you can edit it in many different ways.

The original is broken down into approximately 15 million elements for an A4 size copy, each represented by an electronic signal, and each available for manipulation. The image processor can then alter the image according to your command. For example, you can lengthen or widen an image, move text around the page, add or subtract images and change colour and format — all with automatic colour and density level variations — to faithfully imitate the original.

As a result of the Colour Laser Copier's three calculations with the image data — masking, under colour removal and edge enhancement — text in the final copy is sharp, photos have many density levels and colours are true to the original.

The digitalized operation is handled by two main components, a reader and a printer.

The reader unit consists of a light which scans the original and reflects onto a charge coupled device (CCD) line sensor with superhigh resolution (16 elements per millimetre). It is divided into 5000 elements, each in turn divided into three covered by Red, Green and Blue filters respectively which each allow only one colour to reach the sen-



sor. The light is turned into electronic signals and sent to the printing unit.

The printing unit uses a semiconductor laser to print onto plain paper. The photo-sensitive drum builds up a uniform surface charge. As signals sent from the reading unit reach the printing unit they activate the laser, turning it on and off. When the laser is on it strikes the drum, partially neutralizing the charge, while areas not struck keep their charge. The partially neutralized areas attract toner which is then transferred from drum to paper to make the

copy. This process is repeated four times, to individually pick up the four toner colours.

Creative copying is available through an operation panel and extensive help menu. This makes it possible to enlarge an image 400% for a wall-sized copy, using 16 sheets of A3-size paper; add colour photographs to black and white text; make your own colour overhead projector transparencies; highlight; change colours completely, or later the balance; and copy 35mm slides or negatives, or even 3-D objects.

## Australia to host major artificial intelligence conference

Australia has bid successfully to host a major international conference on artificial intelligence.

The Minister for Industry, Technology and Commerce, Senator John Button, has announced that Australia had been chosen from several strong contenders, including France, Sweden and the Netherlands, to host the International Joint Conference on Artificial Intelligence (IJCAI-91) in Sydney during August 1991.

The decision, taken at IJCAI-87 in Milan, was a major step in international recognition of Australia's capability in

artificial intelligence (AI) research and development.

"Artificial intelligence looks towards developing computers which can work more like people, rather than people having to think like computers. In the long term, computers will use natural language, be able to "see", to infer and reason under uncertainty, and to learn," Senator Button said.

"The Australian artificial intelligence community is doing world-class work in some of these areas, including robotics, knowledge-based system, speech recognition and logic programming."

"The bid to hold the conference here was made by the Australian Computer Society (ACS) National Committee on Artificial Intelligence and Expert systems, with the assistance of the Sydney Convention and Visitors' Bureau and with the active support of my Department.

"The AJCAI conferences are the largest and most significant in the field of artificial intelligence and have been running biennially since 1969.

"They are usually attended by between 3000 and 5000 people. A major international trade exhibit is associated with each conference."

IJCAI-91 will be held at the new Darling Harbour Convention and Exhibition Centre in Sydney.



## News Highlights

### Laser checks for methane

Gold Coast laser manufacturer Laser Dynamics has supplied a laser to BHP for a new gas sensing system to protect its fleet of ocean going liquid natural gas (LNG) tankers. The \$30,000 LDL specialised Nd:Yag laser has been bought by BHP's Central Research Laboratories in Newcastle.

BHP senior research scientist Dr Chris Scott said the LDL laser was a central element in a new system being developed to monitor methane gas concentrations on the company's LNG tankers. BHP is taking delivery of new tankers to transport LNG from Australia's North West Shelf to Japan.

Dr Scott said that methane levels are currently monitored by a multitude of localised sensors. BHP Central Research Laboratories is developing a new semi-automatic system to measure



methane levels over a wide area at pre-programmed intervals. The system could also have wide ranging applications in all LNG transport and storage situations, Dr Scott said.

The advanced LDL Nd:Yag laser was competitive with imported products, Dr Scott said. It also offered the advantage

of immediate access to its Gold Coast manufacturer. Dr Scott said this was particularly valuable as the BHP development called for the laser to be used at a non-standard wavelength, allowing use of spectroscopic techniques to examine atmospheric concentrations of methane.

### Australian-made batteries for Telecom

Pacific Dunlop Batteries has won a multi-million dollar contract to supply batteries for Telecom Australia. It is the biggest order for batteries ever placed in Australia.

The batteries, which will be made in Australia, will have a combined capability of delivering a massive 10MVA (10 million volt-amperes) for 10 minutes. This amount of power output is equivalent to the energy expended getting a fully loaded Boeing 747 airborne by its engines' combined 100,000 horsepower.

Telecom's national media officer, Ms Andrea Gash, said that it was Telecom's policy to support Australian manufacturers and equipment suppliers wherever possible.

Ms Gash said, "We were very pleased to find Australian-made batteries which could meet our requirements, in terms

of both technical performance and delivery schedules.

"From a technical point of view, placing this order with an Australian company has significant advantages. It means we can get replacements immediately if we need them, and it is important for us to have locally based technical product expertise.

"Telecom's special requirements meant we needed a company that could provide up-to-the-minute technology. The largest of the batteries will have to handle very high rates of discharge — an average of 1700 amperes," she said.

By way of comparison, the average home appliance would draw 10 amperes, and even the giant batteries driving 20 tonne locomotives underground at Mount Isa mines only draw 600 amperes.

### TI LAN Development System Contest

Although we planned to announce the winner of the LAN contest in this issue, a surprisingly high proportion of the entries arrived right on the final deadline. Perhaps this was because of the hi-tech nature of LAN technology and need to include details of at least one proposed application with each entry. But whatever the reason, we have been forced to defer announcement

of the winner until the December issue — in order to do justice to all of the entries received, and give each one due consideration.

So to all those who sent in entries, thank you for participating and please bear with the judges a little longer as they wade through them all. By the time you read this, the winner will have been notified, and will be announced next month.

### STC subsidiary to bid for Tasman 2 cable

STC PLC of the UK has formed an Australian subsidiary, Stantel Submarine Systems, which will transfer submarine fibre optic technology to this country. Stantel will set up manufacturing operations in Australia in a joint venture with Australia's AWA, if STC PLC is successful in its bid to manufacture and lay the Tasman 2 fibre optic submarine cable between Australia and New Zealand.

The 2500km Tasman 2 cable will be the first international submarine fibre optic link in the Southern Hemisphere. The \$120 million contract will be let in 1988 for completion in 1991. Tasman 2 is a joint project of New Zealand Telecom and Australia's OTC.

"We are an Australian company, and from our base here we intend to win a considerable share of the Asia/Pacific submarine fibre optic market — worth around \$2 billion over ten years," said Stantel's Mike Hall.

Stantel's parent, STC PLC, has a global reputation for fibre optic submarine cable systems. Its contracts include the world's first international fibre optic link, Belgium 5, operating between Britain and Europe and the 7000km trans-Atlantic PTAT-1 which will link Britain and the United States with a spur to Bermuda.



## \$500,000 R&D contract to Pulsar

Melbourne based electronic engineering and manufacturing firm Pulsar Electronics has been given a major research and development contract by Silicon Valley based drive manufacturer Cybernex Advanced Storage Technology (CAST). The contract follows Pulsar's recent release of its ESDI 5202 controller card, which enables the high speed Winchester drives previously used in mini computers to be harnessed to personal computers and Local Area Networks (LANs).

CAST, which is a subsidiary of the large Century Data group, was the first overseas company to place an order for the Pulsar developed product after it was released in June.

"Under the contract Pulsar is to develop a highly enhanced multi-function controller exclusively for CAST. Pulsar is to receive development fees and a royalties package estimated at \$500,000 in the first 12 months," said Pulsar managing director Mr Philip Delacretaz.

Pulsar also has the right to tender for the manufacture of the controllers.

"If we do well with this — and we will — further R & D contracts are guaranteed. In fact CAST is pressing us to accept a contract to develop a version of our controller for the OS/2 PCs. And some other projects they have been talking about will require the

transfer of large slabs of technology to us."

"We were extremely pleased to be singled out by a company which has such an advanced technology base itself," he said. "Apparently CAST were impressed with the dynamic way we had got the ESDI product to market so far ahead of the competition."

The Pulsar ESDI controller incorporates an AMD chip which was only released to US manufacturers three weeks before Pulsar began manufacture of the product.

Mr Delacretaz said he had negotiated

the right to tender for manufacture, which would turn the deal into millions of dollars. "I did this more out of national pride, than any belief that we could win it," he said.

"The major reason is that the Australian PCB board manufacturing industry is still at the fencing-wire stage. We designed the ESDI controller as a two layer board to get around this."

"But the US market is insisting on four-layer boards to overcome the new "noise" standards for the reduction of electro-magnetic radiation. We just can't build them here, and to subcontract to Taiwan goes against everything we are trying to achieve," he said.

## Govt. defines key areas for telecomms policy review

Commonwealth Minister for Transport and Communications Senator Gareth Evans has identified the four principal policy questions that will be addressed by the Government in developing a comprehensive statement of national telecommunications policy over the next few months.

In an address to the International Institute of Communications Conference in Sydney, Senator Evans said the major issues were:

- What should be the nature and extent of the monopoly powers granted to our telecommunications carriers?

- To what extent should private sector involvement in the provision of telecommunications equipment and services be allowed or encouraged.

- To what extent should the telecommunications carriers be restructured or relieved of Government constraints to enable them to perform their functions more effectively, and in particular compete in open commercial markets?

- How should the industry be economically and technically regulated?

Senator Evans stressed that neither he nor the Government were committed to any particular outcome in the review.

## NEWS BRIEFS

- A new professional audio company called **Rebel Audio** has been launched to cater for the audio installation and contracting market. Behind the new name are well-known audio identities Ian Woodhouse, former MD of Electro Voice, and former national marketing manager for Klarion Enterprises Andrew Horman. Among the lines to be distributed by Rebel are Bel Electronics, Tanktek, Nemesis, Sescom, MicroAudio and Audio Digital.

- **George Brown Group** has been appointed Australian distributor for the semiconductor products of Korean based company Samsung Semiconductor & Telecommunications. GBG will focus initially on the Samsung range of dynamic RAM chips, covering 64K, 256K and 1M bit product. GBG has also been appointed Australian distributor for California-based maker of power hybrid circuits, New Era Electronics.

- Gold Coast-based laser maker **Laser Dynamics** has secured one of the leading US medical and industrial laser specialists, Mr Phurpa (Phil) LadenLa, as its US marketing consultant. Mr LadenLa, who heads LadenLa Associates in Palo Alto, was VP marketing for 11 years at leading US scientific laser firm Lexel Corporation.

- **Electrical Accessories** has moved from its long-time West Ryde address to new and larger premises at Suite 8/9 Foamrest Avenue, Newport 2106, phone (02) 997 8544. The firm has also appointed Peter Mellor as product specialist for transmission line hardware.

- **Audio Telex** has moved to larger premises at 120-124 Beaconsfield Street, Auburn 2144. Phone (02) 647 1411, fax 648 3698.

- The Sydney office of **Vicom Australia** has also moved, to Suite 803, 8th Floor, GBC Building, 8 West Street, North Sydney 2060. Phone (02) 957 2766, fax 957 3821.



## Meet our new Melbourne rep

EA's new Melbourne representative Nikki Roche, who comes to us with a BA from Latrobe University, post-graduate studies in Business and seven years's experience in advertising sales and management in the newspaper and radio industries. We're delighted to have her on the EA team, looking after our Melbourne advertising clients. Nikki can be contacted on (03) 646 3111.



## News Highlights

### Barry Jones signs space agreement with US

Minister for Science and Small Business Barry Jones has signed an agreement which will permit the United States to launch and recover sounding rockets in Australia for scientific non-military, non-commercial purposes over the next 10 years. Mr Jones signed the agreement with the United States Ambassador, Mr Bill Lane, in Canberra.

The sounding rocket program will be conducted by the US National Aeronautics and Space Administration (NASA) and the Space Projects Branch of the Department of Industry, Technology and Commerce (DITAC). The Department of Defence will conduct the launches as DITAC's agent.

NASA previously launched sounding rockets from Woomera between 1961 and 1977.

### HP and Sony to develop 1.3Gb DAT drives

Hewlett-Packard and Sony have announced an agreement to jointly develop and market a revolutionary new computer back-up storage medium based on the controversial Digital Audio Tape (DAT) technology. The companies said that under their agreement they intend to use DAT technology to develop what they call a "Digital Archival Storage System" for computers which will be capable of storing as many as 500,000 pages worth of data (1.3 gigabytes) onto a cassette the size of a business card.

In the entertainment industry, digital audio tape recorders have run into stiff

### Hi-tech ID system goes back to fingerprints

A new personal identification system developed by a Californian engineer could revolutionise the operation of security systems and bank ATMs (automatic teller machines), by using automatic fingerprint scanning instead of hard-to-remember ID numbers.

The system has been developed by Randall Fowler, a spacecraft engineer who worked on the project in his home garage while working by day at TRW. Now Fowler has set up his own company in Palo Alto, called Identix, to manufacture and market the system.

Already Identix has signed a \$US5 million contract to sell its technology to Omron Tateisi Electronics, the \$US1.5 billion Japanese company that makes ATMs and point of sale terminals. Omron is expected to use the Identix fingerprint technology in its new bank ATMs, so before long bank customers may be sticking their finger into an ATM scanner rather than having to key in their PIN number.

opposition from the recording industry which fears that consumers will use them to make perfect copies of records and compact discs. This could cut deep into sales of records and compact discs, they fear. Moves are currently under way to force DAT manufacturers to incorporate a chip into their system that would make it impossible to copy from compact disc players.

HP and Sony don't expect any opposition to their use of the technology, as the DAT storage systems could not be used to make audio recordings.

The DAT storage systems will be aimed mostly at the back-up storage market as they offer major advantages over current tape-based and optical storage systems. For one, tape drive ca-



**Above: Randall Fowler, president of Identix, who developed the fingerprint scanner (left) in his home garage.**

Fowler's device optically scans the pattern on a finger, and generates from the scan a unique digital code. As police have known for many years, fingerprints are very stable — they don't change with temperature, age, nervousness or room acoustics.

At present a self-contained fingerprint scanner costs around \$US7000. However Fowler says that the basic technology could be integrated into an ATM or POS terminal for only \$US500.

capacity has had a hard time keeping up with the rapidly increasing storage capacity of hard disk drives. DATs would eliminate the capacity problem with their 1.3 gigabyte storage capacity.

One of the most promising applications for the DAT storage devices, according to HP program manager Bert Vermeulen, is in desktop publishing. Unlike tape drives, DAT systems can store both data and images in digital form and can access any data or image in less than 20 seconds. Still, DATs will have to battle it out with optical storage systems, which offer the same features plus a much shorter access time. But data on optical disks cannot be erased or altered, which is a major disadvantage.

#### OP AMPS EXPLAINED

Recommended to all interested in linear electronics, operational amplifiers and their applications.

Send your order to:  
Freepost No.4,  
Federal Publishing Book Sales,  
PO Box 227,  
WATERLOO NSW 2017  
No stamp required if posted within Australia

Price: \$4.50 plus \$1.00 p&p

### Bow Electronics buys ACS assets

As noted briefly last month, Bow Electronics of WA has purchased all of the major business assets of Sydney hi-tech manufacturer Appliance Control Systems, for more than \$1 million.

Bow Electronics is a rapidly expanding contract electronics manufacturer, with ongoing contracts with government departments, Telecom, DOA and various local firms. Recently 60% of the company was acquired by Palantronics, a subsidiary of UTC Ltd.

The new equipment gives Bow Electronics high capacity automated production for SMD technology, capable of loading 20,000 components per hour. When merged with existing WA operations, this will give the company a leading position in electronics manufacturing, according to UTC managing director Mr Bill Henderson.

The company is also nearing completion for accreditation to AS1821, which will allow it to compete for defence and offsets manufacturing contracts. It is expected to be the first WA electronics manufacturer to achieve this status.





# "MINIATURE SOLID TANTALUM CAPACITORS"

## KEMET<sup>®</sup> ULTRADIP II

The new gold colour epoxy series with laser marking to MIL-1-46058. Conforms to Telecom spec.

CE-65050 (RJEP451 .../...)

This series has many features of the Kemet military approved types, but at prices allowing design into commercial-industrial equipment.

Available — exstock.


**FREE SPECIFICATIONS AND DATA FROM:**

## CRUSADER ELECTRONIC COMPONENTS PTY. LTD.

81 PRINCES HWY, ST PETERS, NSW 2044 Phone 519 5030 516 3855 519 6685 Telex 23993 or 123993

### APPOINTED DISTRIBUTORS:

SYDNEY GEORGE BROWN & CO PTY. LTD. PHONE 519 5855 GEOFF WOOD ELECTRONICS PTY. LTD. PHONE 810 6845  
WOLLONGONG MACELEC PTY. LTD. PHONE 29 1455 CANBERRA GEORGE BROWN & CO PTY. LTD. PHONE 80 4355  
NEWCASTLE NOVOCASTRIAN ELECTRONIC SUPPLIES PHONE 61 6055 MELBOURNE R.P.G. AGENCIES PTY. LTD. PHONE  
439 5834 JESEC COMPONENTS PTY. LTD. PHONE 598 2333 GEORGE BROWN & CO PTY. LTD. PHONE 419 3355 BRISBANE L. E.  
BOUGHEN & CO PHONE 369 1277 COLOURVIEW WHOLESALE PTY. LTD. PHONE 275 3188 ST LUCIA ELECTRONICS PHONE  
52 7466 ADELAIDE PROTRONICS PTY. LTD. PHONE 212 3111 D.C. ELECTRONICS PTY. LTD. PHONE 233 6946 PERTH SIMON  
HOLMAN & CO PHONE 381 4155 PROTRONICS PTY. LTD. PHONE 362 1044

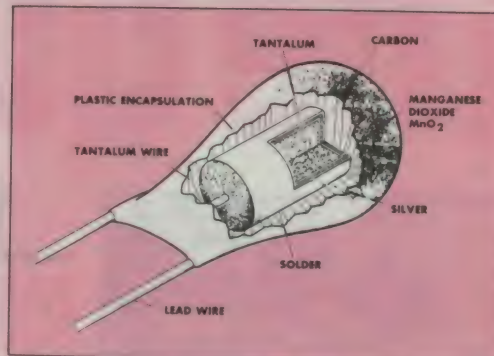

## GOOD SOLDERING REQUIRES GOOD TOOLS!

**BUY THE BEST  
BUY AUSTRALIAN MADE.**

**ADCOLA**

**ROYEL**


- Rapid, controlled heat for printed circuit boards.
- Lightweight, with industrial reliability.
- 'ARMCLAD' long-life tips.
- Plugs direct into standard 240V power point.

**WORLD  
CLASS  
QUALITY**

**LOW  
COST.**



ASK YOUR NEAREST  
ELECTRONIC PARTS  
SUPPLIER!




**USED SUCCESSFULLY  
THROUGHOUT  
THE WORLD.**

■ QLD: (07) 277 4311 ■ NSW: (02) 647 1533 ■ SA: (08) 232 0001 ■ WA: (09) 381 5500 ■ TAS: (002) 34 2233

MHL 4026



# You won't beat the quality...

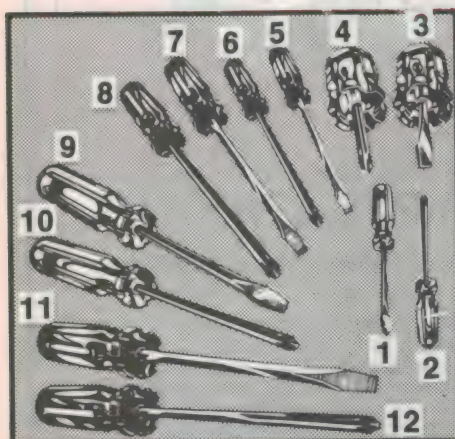

## Quality Screwdrivers

With this great range of screwdrivers you can screw it up without ruining it!

Cat No.	Type	Pay Only
1	T-6010 Mini — Flat Head	\$1.50
2	T-6015 Mini — Phillips Head	\$1.50
3	T-6020 Stubby — Flat Head	\$2.45
4	T-6025 Stubby — Phillips Head	\$2.45
5	T-6030 Standard — Flat Head	\$1.95
6	T-6035 Standard — Phillips Head	\$1.95
7	T-6040 Popular — Flat Head	\$2.45
8	T-6045 Popular — Phillips Head	\$2.45
9	T-6050 Long — Flat Head	\$2.45
10	T-6055 Long — Phillips Head	\$2.45
11	T-6060 Heavy — Flat Head	\$4.45
12	T-6065 Heavy — Phillips Head	\$4.45

## Remember when you were a kid?

The old paddle pop stick on the electric motor... Relive those wondrous days of yore with our great little electric motors! Famous Mabuchi brand (yes, the ones like when you were a kid!), nominal 3 volts DC. Bewdly! Cat M-9961

**\$2<sup>75</sup>**



## TRIP the light fantastic

### PAR 38 Coloured Bulbs

240 volt, highest quality pressed glass with internal reflector. Ideal for semi-rough handling (they are glass, after all) — eg disco and lightshow use. All rated at 100 watts, ES (Edison screw) fitting.

Yellow: Cat S-3850 Blue: Cat S-3854  
Red: Cat S-3852 Green: Cat S-3856

**\$9<sup>95</sup>**

### Halogen Torch Bulbs


At last the voltage bulbs: whiter, stronger light. Less infra-red output so they're more efficient. In fact, the manufacturers say up to 300% brighter than conventional bulbs.

2.8 volt — use with 2 x 'D' batteries Cat S-3950

4.0 volt — use with 3 x 'D' batteries Cat S-3955

5.5 volt — use with 6 volt lantern or 4 x 'D' batteries Cat S-3960

**All \$7<sup>65</sup>**



### Beat Triggered Strobe

What's better than a strobe for parties? A beat triggered strobe! Really makes your music come alive by flashing in time with the music — hence the name. Of course you can also use it in conventional strobe mode — with a variable flash rate up to about 30 flashes per second. Kit includes spun aluminium photo reflector with safety perspex guard, plus super long life discharge capacitors. Cat K-3153

**\$59<sup>95</sup>**

### R80 Daylamps

Ideal for display, party or other decorative or warning purposes. Available in four colours; 240V operated. ES base.

Yellow: Cat S-3851

Red: Cat S-3853

Blue: Cat S-3855

Green: Cat S-3857



**\$5<sup>95</sup>**



### Musiccolour IV

The Musiccolour Mk IV in four chase patterns plus auto chase and reverse chase AND four channel colour organ with built-in microphone means you're ready to stage a lightshow! Comes with sturdy steel case and exclusive DSE front panel with LED display. Detailed instructions supplied, too! Cat K-3143



**\$135**

## BUILDERS... SPARKS...

### 3 Core Flat Light Cable

Need an extra light in the bathroom, laundry, work space, etc? 3 core flat 1/113 light cable with insulated earth and rated at 10 amps (1.13mm) at super low prices. Cat W-2060

**95¢ per metre**  
**\$70 (100m roll)**

### 3 Core Power Cable

Save even more! 3 core flat 1/178 power cable with insulated earth at this fantastic low price. Usually referred to as builder's cable, rated at 25 amps (2.5mm) you can have power wherever you need it! Cat W-2062

**\$1<sup>50</sup> per metre**  
**\$110 (100m roll)**



### Your local reseller is:

• **NSW** • **Batavia**: A. Cummings & Co. 86 2284 • **Bowral**: F.R.H. Electrical 61 1861 • **Broken Hill**: Hobbies & Electronics 88 4098 • **Charlestown**: Newtronics 43 9600 • **Coffs Harbour**: Coffs Harbour Electronics 52 5684 • **Deniliquin**: Deni Electronics 81 3672 • **Forster**: Forster Photo Sound 54 5006 • **Inverell**: Lyn Willing Electronics 22 1821 • **Leeton**: Leeton Record Centre 53 2081 • **Lightning Ridge**: Lightning Ridge Newsagency 29 0579 • **Lismore**: Decro 21 4137 • **Moree**: Moree Electrical Services 52 3667 • **Newcastle**: Newtronics 43 9600 • **Port Macquarie**: Hall of Electronics 83 7440 • **Orange**: Fyfe Electronics 62 6491 • **Springwood**: Wellington's Electrical Discounts 51 4888 • **Taree**: Brad's Electronics 52 6603 • **Tumut**: Tumut Electronics 47 1631 • **Ulladulla**: Paula Electronics 55 3989 • **Wagga**: Phillips Electronics 21 6558 • **Wellington**: Wellington Electrical Service 45 2325 • **Windsor**: M & E Electronics 206 George St, 77 5935 • **Young**: Keith Dongas Electronics 82 1279 • **YVIC** • **Buronia**: Ray Cross Electronics 782 2422 • **Colac**: Colac Electronics 31 2847 • **Dunolly**: Ken Roberts (Finders) 88 1333 • **Echuca**: Webster Electronics 82 2956 • **Mildura**: McWilliams Electronics 23 6410 • **Morwell**: Morwell Electronics 34 6133 • **Rosebud**: Penronics 86 7686 • **Shepparton**: GV Electronics Centre 21 8866 • **Sunbury**: Calco Electrical 744 1564 • **Warrnambool**: Marrtronics 62 9870 • **Werrisbee**: Gobies Photographic & Video 741 7089 • **QLD** • **Bundaberg**: Bob Elkin Electronics 72 1785 • **Calima**: Electronic World 51 8555 • **Caloundra**: Hume's Electro-Mart 91 4270 • **Dysart**: Dysart Videotronics 58 2107 • **Gladstone**: Supertronics 72 4321 • **MacKay**: Stevens Electronics 51 1723 • **Moodoolaba**: Mail's Electronics 44 6588 • **Maryborough**: Keller Electronics 21 4559 • **Mt Isa**: Outback Electronics 43 3331 • **Nambour**: Nambour Electronics 41 1604 • **Noosa Heads**: Sunshine Phone Systems 47 4444 • **Townsville**: Tropical T.V. 79 1421 • **SA** • **Mt Gambier**: Hutchessons Communications Centre 25 0400 • **Whyalla**: Eyre Electronics 45 4764 • **WA** • **Albany**: Micro Electronics 41 3432 • **Karratha**: Dave's Oscitronics 85 4836 • **TAS** • **Devonport**: A.I. Electronics & Hobbies 24 8322 • **Launceston**: Wills Electronics 31 5688 • **NT** • **Alice Springs**: Farmer Electronics 52 2967



# You won't beat the price!

## CHARGE!

### NiCads — Extra Value Packs

Save with NiCad battery packs! Long life, high power batteries for all your portable power needs.

Qty	Type	Cat No.	Price
4 x AA	500mAh	S-3150	\$18.95
2 x C	1.2Ah	S-3152	\$15.95
2 x D	1.2Ah	S-3154	\$16.50
4 x AA	600mAh	S-3160	\$19.95
2 x C	2.0Ah	S-3162	\$24.95
2 x D	4.0Ah	S-3164	\$27.95

### Gell Cells (12V)


Non-spill lead-acid batteries. High capacity, ideal for backup (alarm, etc). Or for power in their own right. Can be used in any position!

Cat No.	Type	Price
S-3315	1.2Ah	\$29.95
S-3316	1.9Ah	\$34.95
S-3320	2.6Ah	\$35.00
S-3322	6.5Ah	\$55.00



### The Button: Cheap Insurance!

It simply plugs into any power point — and protects everything on that circuit (ie on other power points) from damage caused by power line spikes. Computers, videos, hi-fis, TV's Industrial and domestic machines... all can be protected by The Button. Cat P-5310




**\$36.75**

- Protects all three lines (active/neutral, active/earth and neutral/earth).
- Better than 10ms response time.
- 150 Joule rating (consumes no power except when a surge/spike is present).
- If you value your equipment, you'll value The Button even more — especially at our great value price!

### Electric Motor

Save 40%! Electric Motor with switch. Great for hundreds of projects! Cat J-1041

**WAS \$2.50 NOW \$1.50**



### Dyna Bolt Eye Pack!

For tying support cables for antenna masts to concrete, masonry, etc. 8 x 45mm. 2 per pack! Cat L-4575

**\$1 OFF! \$4.95**



### Transavers

DSE 1200 transformer at a special price. 240 volt primary with secondary tapings 40V @ 10mA, 19V @ 200mA and 11.2V @ 450mA. Cat M-1200



**\$8.50**

### Coax Relay

Save \$10!! For PCB mounting it's ideal for all HF, VHF and UHF switching! Rated at 12 volts, 80mA. Cat S-7402

**Save! \$29.85**

### Headphone Adaptor Kit

Just about every combination of plug, socket and lead you could want to connect headphones to anything! Save \$5!! Cat C-4180

**NOW ONLY \$9.95**



### Bargain Cable Clamps!

Heavy duty cable clamps in pack of five. Keep things neat and secure! Cat H-1972

**Pack Of 5 \$1.25**


**\$1.25**

### Wrap and Save!!

Save an incredible \$5 OFF the economy Wire Wrapper/Stripper. Get that professional finish! Cat T-3650

**\$7.95**

**WAS \$11.95**



### CD Cleaning Kit!

Save \$5!! Keep your Compact Disks clean for the best sound. Look after your valuable investments! Cat C-7085

**WAS \$14.95**

**ONLY \$9.95**

### Miniature Slide Switch!

Less than 1/2 price! For PCB mounting with 4 positive location positions. Ideal for input selection! Cat S-2060

**SAVE 50¢**

**45¢**



### Metal Line Socket!

Great saving! Heavy duty metal line socket for coax! Cat L-4509


**\$1 WAS \$1.20**



### Assorted Metric Screws

Great for the home or workshop! Over 200 pieces in the most popular sizes. Cross, round, countersunk... the lot! Cat H-1680

**\$6.80**



### Vibration Sensor!

For use with most alarms! Senses vibration in windows, ceilings, doors, etc. Huge savings!! Cat L-5250

**\$4.50**



### Ideal for Robotics!

The Biometal Wire Starting Kit lets you make mechanical actuators that can be triggered by heat or electricity. Comes complete with comprehensive instruction manual! Cat K-7000

### NiCad Charger Reduced!

Made specially for 'D' size NiCads! Takes two or four batteries. Rated at 2 x 3V, 400mA! Cat M-9400

**\$29.95**



### CB Antenna Spanner!

Keep one in the glovebox! Two open end and two full circle spanners in one unit to fit all those antenna nuts! Cat D-4018

**99¢**

### Over 60% Off!

Quality Adaptor 'F' Male to RCA Female! Save \$2.45 OFF our normal price! Cat P-2100

**\$1**



### NiCad Saver!

Fantastic value Sub C Fast Charge NiCads at a low low price. Charge them up in about 15 minutes!! Cat S-3324

**Was \$6.50**

**ONLY \$4.50**



### Time Saving Cable Checker

Designed for audio use. Checks cables in seconds. Ideal for roadies, bands, audio technicians, etc! Cat Q-1532

**ONLY \$49.95**



### Metal Line Plug

Heavy duty metal construction for coax cable connections! Cat L-4508


**NOW \$1**



### Save on 9V NiCads

Great savings on 9V NiCads (the ones most used in transistor radios). 100mAh rated! Cat S-3308

**\$19.95**



### UHF/VHF Diplexer!

So you can run both UHF and VHF antennas to your video or TV. Designed for indoor use! Cat L-4470

**\$6.95**



### 2 Tone Piezo!

Ideal as a local audio alarm! Emits high pitched warbling sound. 9-16V operation! Save \$2!! Cat L-7027

**Value! \$5.50**

### Safety Brake Lights

Collision preventing rear mounted flashing brake light at this fantastic LOW price. Save money — save accidents! Cat A-8526

**\$14.95**



**DSX PRESS**  
DICK SMITH ELECTRONICS EXPRESS ORDER SERVICE

ORDER BY PHONE:  
TOLL FREE DSXpress ON  
(008) 22 6610  
For 24 hour Despatch  
SYDNEY (02) AREA 888 2105

**DICK SMITH ELECTRONICS**

PTY LTD



# Silicon Valley NEWSLETTER . . .



## National wins battle for Fairchild

In a deal that ends the existence of the company that virtually founded the semiconductor industry in the late fifties, National Semiconductor announced it has agreed to acquire most of Fairchild Semiconductor for \$122 million in cash and stock.

"We believe this acquisition provides complimentary strengths — broadening our product offerings, customer base and technology — and further enhances our competitive position," commented National president Charlie Sporck.

In acquiring Fairchild, Sporck continued, "National becomes America's best technologically balanced semiconductor supplier with leading-edge capabilities in CMOS and bipolar products across a broad line of proprietary offerings."

Industry analysts praised the move by National. They said National is paying a bargain-basement price as it is acquiring an estimated \$650 million worth of plants, equipment and other assets, including Fairchild's state-of-the-art research facilities in Palo Alto and the gate-array custom chip operation in Santa Clara which even uses a Cray supercomputer for chip designs.

After briefly giving up its position as Silicon Valley's largest chip company to Intel, and even AMD following its acquisition of Monolithic Memories, National will once again be the area's biggest chip maker with some \$US1.5 billion in chip sales. National will also be the third largest chip maker in the US behind Texas Instruments and Motorola, and the sixth largest in the world.

The Fairchild acquisition will help boost National's position in several key segments of the semiconductor market, including logic chips, analog and digital devices, military semiconductors, and custom-made products.

While it is acquiring most of Fairchild's useable assets, National is not taking over any of Fairchild's under-utilised plants in Germany and Japan. Also excluded is Fairchild's former MOS facility in South San Jose where a huge chemical spill polluted the drinking water of a nearby neighbourhood.

Fairchild recently settled a huge lawsuit by the residents of the neighbourhood who claimed the spill resulted in a large number of still-births, miscarriages and birth defects.

The sale to National also ends an eight-year nightmare for Schlumberger, as the Fairchild subsidiary has cost the French oil-drilling equipment leasing firm as much as \$2 billion in investments and operational losses.

## The birthplace of Silicon Valley



Since 1939, millions of people have driven by the house pictured on 367 Addison Avenue in Palo Alto. Except for some employees of Hewlett-Packard who regard it as something of a shrine, few bypassers have ever taken much notice of the two-storey house and the modest 12x18-foot garage at the end of the driveway.

But the California Legislature has approved a bill making the garage a permanent historic landmark, as "The Birthplace of Silicon Valley".

It was in this garage that two young Stanford engineering graduates, William Hewlett and David Packard, encouraged by their professor Frederick Terman, started their electronics company. In the garage, Hewlett and Packard built their first product, an audio oscillator for Walt Disney which was used in the production of the classic "Fantasia" movie.

With the decision to make the garage an official historic landmark, a bronze and brass plaque will be placed at the garage which was built in 1905.

While a number of different factors led to the explosive growth of the electronics industry in Silicon Valley, most historians and Valley insiders agree that the formation of Hewlett-Packard provided perhaps the biggest stimulus. This is because H-P became the first to build its facilities on the property which Stanford University again at the suggestion of Terman, had designated for industrial development.

The close proximity between the university and industry provided a unique environment for new companies to start-up and flourish. Later, as the industrial area around Stanford filled up and roads, housing, and other infrastructure improved elsewhere in Santa Clara County, companies moved south to Mountain View, Sunnyvale, Santa Clara, and San Jose.

## Atari buys retail chain

Most major US consumer computer and electronics retail store chains have refused to carry Atari's ST line of personal computers. To catch up with Apple, IBM, Compaq and others in this vital distribution channel in the low-end of the personal computer market, Atari has taken matters into its own hands by buying one of the fastest growing of those chains.

The Sunnyvale computer company has agreed to pay \$US67 million for the Federated Group, a chain with some 66 stores across the US.

For employees of Federated, the move is undoubtedly a mixed blessing. On the one hand, the sale to Atari will ensure the survivability of their company which has been losing millions of dollars in the past two years. On the other hand they will now be working for Atari chairman Jack Tramiel, who is expected to apply some of his well known cost-cutting traits to the Federated organisation in an effort to return it to profitability.

The move, analysts agreed, will give



Atari a much-needed boost to the effectiveness of the firm's US distribution channels. While Atari's STs are selling well in Europe, its US sales account for only about one-third of the company's revenues, due mostly to Atari's inability to penetrate the domestic retail market. As a result, Atari's share of the US personal computer market has remained around the 2% level.

## Fujitsu to build ASIC plant in US

In a move that could further intensify competition in the ASIC marketplace, Fujitsu announced it will invest some \$US70 million in a new 100,000 square-foot chip manufacturing facility to be built in Gresham in Oregon.

Fujitsu said it hopes to begin manufacturing customer-tailored chips at the facility as early as next fall.

The Gresham move is the latest effort by Fujitsu to increase its presence in the United States. Back in 1984, Fujitsu announced plans to build a chip facility in the United States and bought the Gresham property. But reconstruction plans were halted when the chip industry, suffering from the deadly combination of overcapacity and slow demand, fell into a severe two-year slump.

Earlier this year, Fujitsu tried to buy its way into the US through the proposed acquisition of Fairchild, a move that was blocked by the Reagan Administration. That failure prompted Fujitsu management to take another look at building the Gresham facility.

Already, Fujitsu is the world's largest manufacturer of ASIC chips with annual sales of close to \$US400 million in 1986. Apparently the firm wants to expand its custom chip expertise into the United States where the ASIC market has already been suffering from the presence of too many competitors, each offering slightly different approaches to the ASIC dilemma.

## How Sculley ousted Jobs from Apple

It is late-May 1985: Apple co-founder Steve Jobs has been greatly upset for six weeks, ever since John Sculley, the president he headhunted from Pepsi-Cola, took the Macintosh division away from him.

But Jobs is ready to strike back and return Sculley to sodaland. The following day, Jobs knows, Sculley will be off to China to meet with that country's vice premier to talk about getting Apple II computers into PRC classrooms.

Secretly, Jobs has been plotting with some of his loyal following among Apple's executive staff about firing Sculley while he's away.

Somehow, the word about the forthcoming revolt reaches Jean-Louis Gasse, a free-spirited Frenchman who was appointed to replace Jobs as head of the Macintosh group. In his heavy, but pleasant French accent, Gasse tells Sculley: "There are forces trying to throw you out of the company..." Sculley takes immediate defensive action. He cancels the trip, and instead walks into the executive meeting at which Jobs was planning to pull off the mutiny.

Sculley wastes no time and confronts Jobs, accusing him of plotting a coup. Jobs still thinks he has enough support to pull off his scheme. He attacks, charging that Sculley was hurting Apple by not understanding manufacturing and losing respect among middle managers.

*Continued on page 141*

## INTERFACE YOUR ENTIRE STAFF ACROSS A CITY, A COUNTRY, OR AN OCEAN



Settle engineering, manufacturing, marketing, sales, and financial problems *as they occur*—instantly! Permits unlimited numbers of individuals or groups to conduct meaningful and productive dialogues at a moment's notice, without the complicated logistics of assembling a group at some central point.

WE'LL BRING IT TO YOU FOR A DEMONSTRATION.

### Totally Portable


Fits in sturdy, protective carrying case (optional) no larger than an attache' case. Sets up in seconds.



### Truly Intelligent Electronics

Audio module with "smart" microphones and ingenious sophisticated microprocessor circuitry prevents audio chaos. No need for special acoustic room treatments. Interconnects through your telephone system—but far more intelligible, versatile, and simpler than traditional conference calls. Requires no complex training of personnel.

## TELECONFERENCING...TOMORROW TODAY

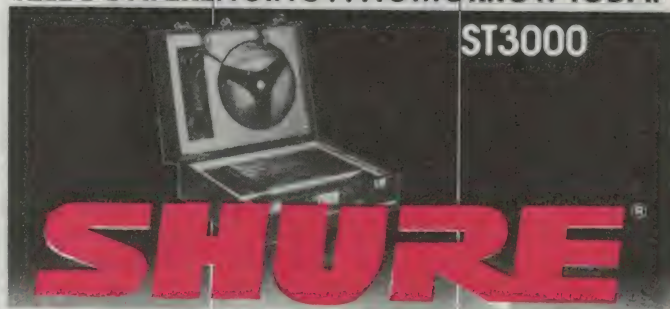

**AUDIO ENGINEERS PTY. LTD.**  
342 Kent St, Sydney, NSW. 2000  
Ph: (02) 29-6731

**MARKETEC PTY. LTD.**  
51 Scarborough Beach Rd,  
North Perth, WA. 6000  
Ph: (09) 242-1119

**AUDIO ENGINEERS (VIC)**  
Ph: (03) 879-0320

**AUDIO ENGINEERS (QLD)**  
Ph: (02) 29-6731

AE15



# Circuit & Design Ideas

Interesting circuit ideas from readers and technical literature. While this material has been checked as far as possible, the circuits have not been built and tested by us. As a consequence, we cannot accept responsibility, enter into correspondence or provide constructional details.

## Refrigerator auto-run unit

This circuit was devised to allow the automatic time-out of an electro-magnetic clutch after a period of 15, 30, 45 or 60 minutes. The clutch drives a refrigeration compressor onboard a cruising yacht, and as the unit is driven from the main engine, the clutch was manually switched on and off. The problem was that if the compressor was left running, the beer became solid.

The digital timer uses a RC oscillator formed from gates IC1a and b, oscillating at 4.55Hz, to clock counter IC3 via the enabling AND gate IC2a. The counter divides the fundamental to a signal with a period of 120 minutes at output Q14, 60 minutes at Q13 and 30 minutes at Q12.

On start-up, the reset line is taken high and the counter's outputs are

cleared. The output line is inverted to high, base current flows, transistor BC337 saturates and then energises the relay, and gate IC2a allows clock pulses through to the counter. When the selected line goes high, at the half period, the counter is disabled and the relay opens. The circuit remains in this state until reset.

The 15 and 30 minute lines are ANDed to provide a 45-minute preset.


The SPDT centre-off switch is used as shown, so that manual operation is unaffected, and when in the Auto-Run position the relay is energised for the preset time period. A 12V regulator

provides a stable supply to the oscillator, which is filtered with the 100uF electrolytic capacitor. A green bezel lamp indicates whenever the fridge is running, whilst the red LED indicates that power is applied to the circuit. Calibration of the unit was carried out by initially setting VR1 at mid-range and timing the run time of the unit. If the period is greater than that set, VR1 is reduced and vice-versa.

The circuit could be useful for a variety of situations where a device is to be turned on and then off some preset time later.

Richard Grant,  
Mordialloc, Vic.

**\$20**

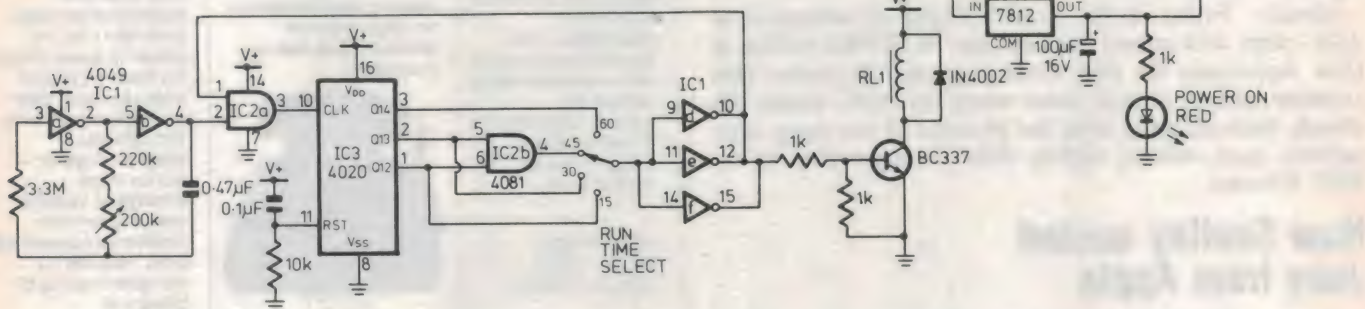

## Low-cost deep-cycle NiCad charger

This circuit is a simplification of the EA charger of March 1987. It is more flexible, but somewhat less convenient in use.

NiCad batteries have rather delicate health, but a soft life is likely to lead to reduced capacity. Deep discharge is necessary to avoid gross overcharge of the stronger cells in a battery, as their reduced capacity brethren are given a full charge. A voltage of 1.1 volts per cell is conventionally taken as the end point because very little capacity remains and there is otherwise the risk of polarity reversal as the strong cells reverse charge the weaker ones.

Discharging the cells individually is evidently desirable. An extra transistor has been added to the output of each comparator to drive the discharge transistors and light the LEDs. In use, the LEDs glow as the cells are discharged

and go out one by one as the cells reach the end point. The cells may be removed for storage or recharge when the last light has gone out. If not, the LEDs will continue to flash sporadically as the unloaded cells recover.


A number of other changes should be made to the discharge circuitry of the EA design. These are:

1. The trickle charge resistors (RT) should be omitted, or the LEDs will never go out and the cells never properly discharge.


2. A 1M pullup resistor on the inverting input of the negative comparators is necessary to prevent the inputs floating and keep the LEDs off when no cell is present.

3. The reference voltage divider has been beefed-up to prevent loading by the 2.2M feedback resistors, which otherwise leads to excessive hysteresis.

On the charging side, there is nothing wrong with charging cells in series. It has the great advantage that only one constant current source is required and

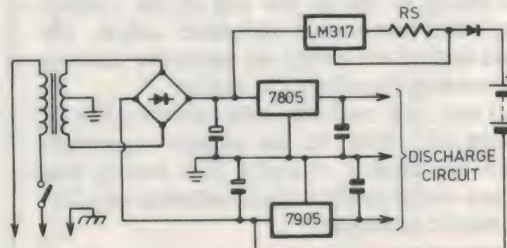



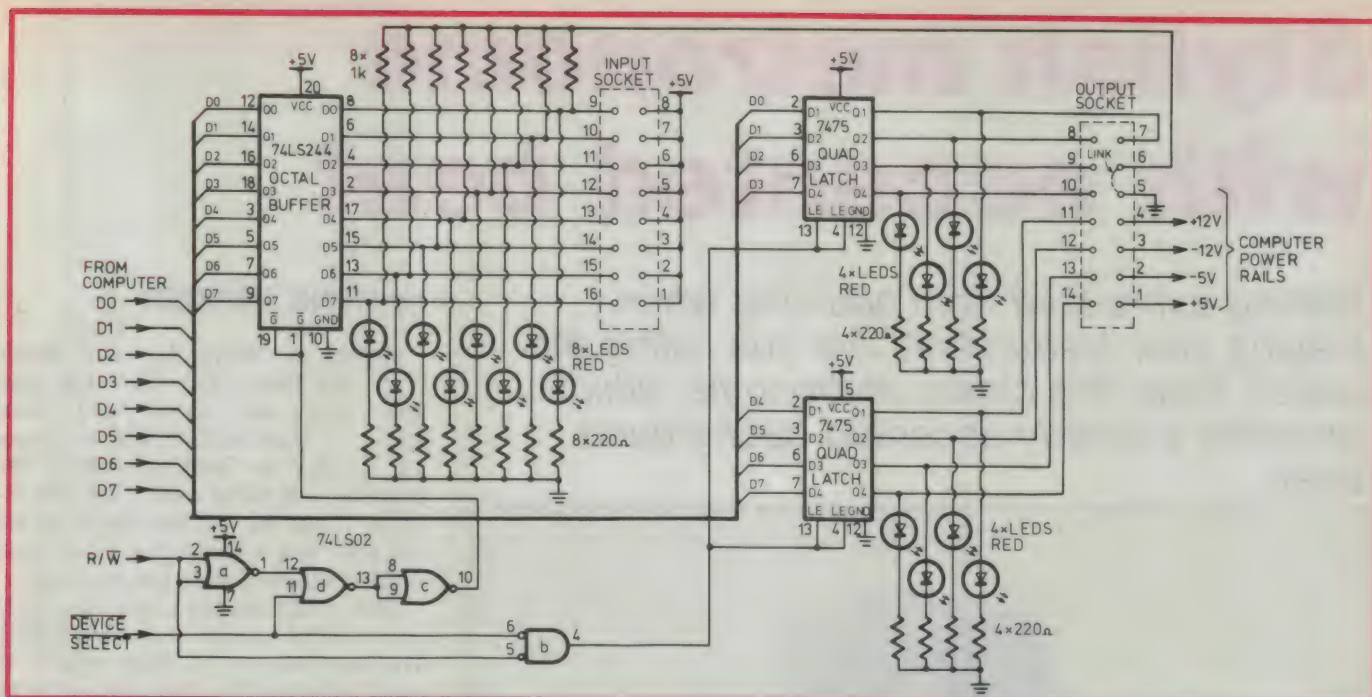

## I/O expansion for Apple II+

This board allows 8 channels, both of input and output, for the Apple. Each input channel and each output channel is monitored by a LED, so the user always knows what is going on. Input is fed in through a 16-pin DIL socket. Another socket could be used if desired, but this system facilitates easy connection of other specialised boards, either for input or output or both, to the main board. The input socket can also hold an 8-way DIL switch, for testing or hardware switching purposes.

Output is fed through a 14-pin similar socket, which also has pins for the four power rails of the computer, the ground and one pin used to tie the input channels to ground if needed.

A 74LS244 octal tri-state buffer is used to take input, as little current driving capacity is necessary to drive the Apple bus. Eight 1k resistors tie the inputs to ground through a wire link inserted in the output socket if this function is desired, for example if pushbuttons or DIL switches are used. Using

logic (from the 7402 quad NOR gate), the 74LS244 is enabled only when the R/W-bar is high (i.e., the computer is reading and the bus is free) and the DEVICE SELECT-bar is low (the computer is in fact reading from the appropriate I/O slot, and not a location in RAM or ROM).

Two TTL 7475 quad latches are used for output, because of their TTL current driving capacity. The remaining 7402 gate is used to ensure that these are only accessed when DEVICE SELECT-bar is low and R/W-bar is low. Access at any other time could destroy the data in the latches.


It is suggested that the board be mounted outside the computer as the LEDs should be visible and space must be available for other boards to plug into it. A cable thus runs into the computer, leading to a small board used as a plug for the Apple's slots.

The location of the card in memory can be calculated by multiplying the slot number used by \$10, and adding it to \$C080. The card may be used in any slot (0-7). To output data, load from it in the same way.

The board has many uses. It can control a complete high-tech alarm system with up to eight sectors, and, if one has a modem, report a break-in as soon as it occurs. It can also be used to output data to a D-to-A converter to generate music, control instruments, or accept data via an A-to-D converter from a microphone, machinery or other equipment.

Ross Donnelly,  
Lindfield, NSW.

**\$20**

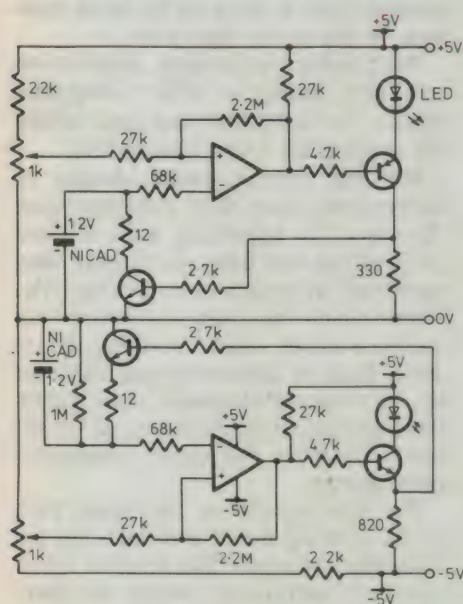

the current demand is halved. A suitable current source using the LM317 is illustrated.

The value of the series resistor  $R_s$  for a charge current  $I_c$  is found from the equation  $R_s = 1.23/I_c$ . For a charge rate of 50mA, 24 ohms (0.25W) is required.

Alternatively, a 7805 could be used (50mA requires 100 ohms at 0.5W), but at the cost of less voltage headroom and a higher control resistor rating for C and D size cells.

The charge circuit should be run from the main filter capacitors using a commercial electronic timer for the timing function. A period of trickle charge after the main charge is beneficial as it facilitates oxygen recombination within the cell. Using the LM 317, up to eight cells may be charged in series at once.


J. Crichton,  
Winmalee, NSW

**\$25**



# Stylish metronome with accented beat

*Getting exhausted from counting when playing your instrument? Are you losing the pace? Build this classy metronome, which provides a steady accented background beat.*

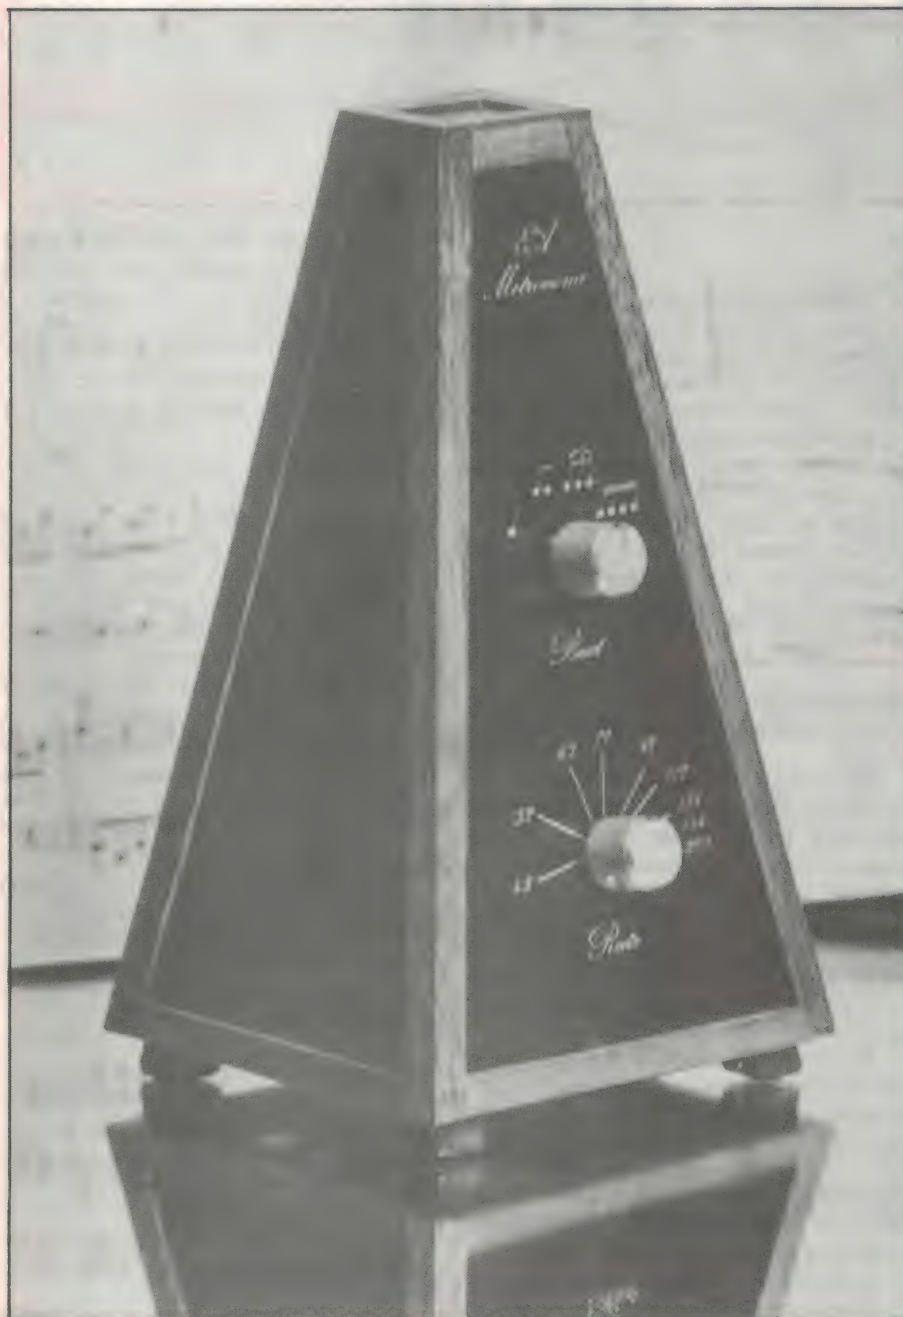

**EA's metronome: when looks count.**

by HENK MULDER

It goes on forever, or so it seems: "... and three, and four, and one, and two, and three, and four, and ..." Most students who are learning to play an instrument dread the counting; it is rather exhausting. But tiring as it may be, the counting is an old and solid way to develop a steady beat, which is required when playing music.

Also, when reading music, the rhythmic patterns can be very complicated. The only way to get them right is to count while reading the music and to hit the right key or press the required valve at a certain count.

Once the student has got the rhythm in his mind, the counting can be left out.

Music schools often have metronomes; little boxes which produce a sound similar to that of a ticking clock. The beat of the metronome is variable between, say, 42 and 208 beats per minute.

In certain cases, the metronome takes over the counting for the student; the steady beat provides enough reference to stick to the rhythm.

When a band without a rhythm section rehearses, the metronome can be indispensable to keep all the band members in step at the same pace.

With today's technology, metronomes are fairly simple to build. Using electronics, the metronome has come within the reach of the home constructors.

For this reason several designs of metronomes have been published over the years. But regrettably, most of these projects had one thing in common: they were built in project cases lacking style. Even though they may have been very useful, a lot of people wouldn't like to see a piece of laboratory equipment on top of their stylish piano. As a result, these people might decide to go for the more expensive but classy commercial metronomes.

For these people we have gone back to the drawing board and taken up the soldering iron again. The result is a new low cost metronome, which we think will change your mind.

The sound of this metronome is really



good but not very special; it just sounds like somebody tapping on a box.

Of course it features an accented beat, as every self respecting metronome nowadays does. Every second, third or fourth beat is accented. Or all of them, if you like.

When you look at the older metronome designs which featured an accented beat, you will notice that quite a few of them did not provide a beat rate scale. The reason for not providing a scale was in most cases technical: each accented beat setting required a different beat scale.

A beat rate scale however is most useful. Most music pieces specify the speed at which it has to be played. Often this speed is specified as the number of beats per minute.

We have designed this new classy metronome to have one single scale for all the different beat settings. And the scale provided is in beats per minute, as required.

To avoid confusion, when talking about beats per minute we mean accented beats per minute. The background beat is a counting aid and can be ignored when determining the beat rate.

Construction of this project involves two phases. The first is constructing the electronic "insides" of the metronome; the second is building a classy box.


If you take your time with it then you will end up with a beautiful metronome, which has only one disadvantage. When you are showing off your musical abilities to friends with the metronome in the vicinity, then there is a slight risk that the applause may be for the metronome, and not your performance!

## The circuit


The circuit isn't very complicated at all, even though it might not be too obvious at first sight. Leaving out the tricky details, there is an adjustable oscillator (IC1) whose output signal is divided by 2 (IC2) and by either 2,4,6 or 8 (IC3). The output of IC2 is the source for the background beat, and the output of IC3 provides the accented beat. The rest of the circuitry converts the stiff square wave signals of the counters into a pleasant beat signal.

Let's get down to the details. IC1, the ubiquitous 555 timer, is wired as an astable multivibrator. When S1b is in position 1, then the total capacitance as seen by IC1 is 40uF. With pot RV1, the frequency can then be varied between 1 and 8.3Hz.

The output beat (S1 still in position 1) will be half the oscillator frequency,

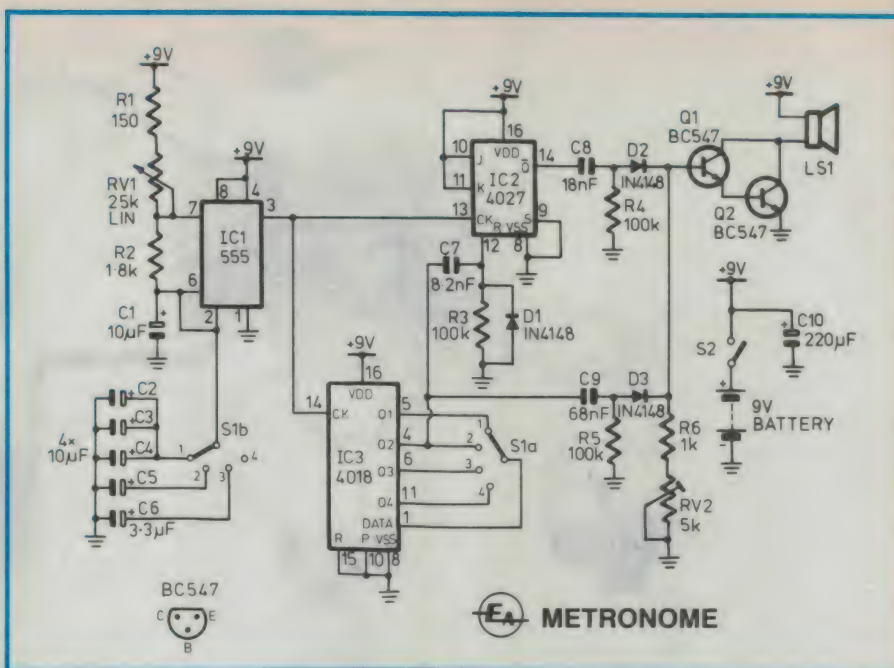


The circuit diagram of the metronome. As you can see, it's quite elegant.

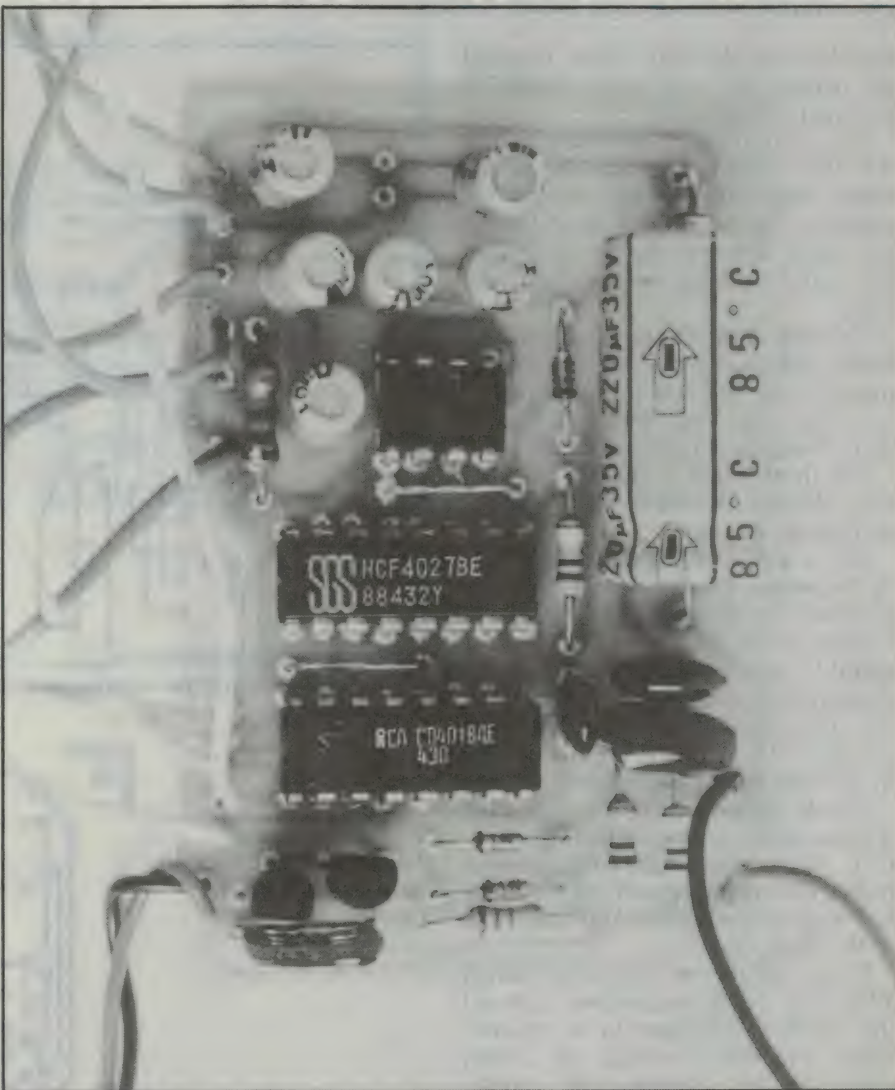

The assembled PCB. Note that the final version is slightly different.



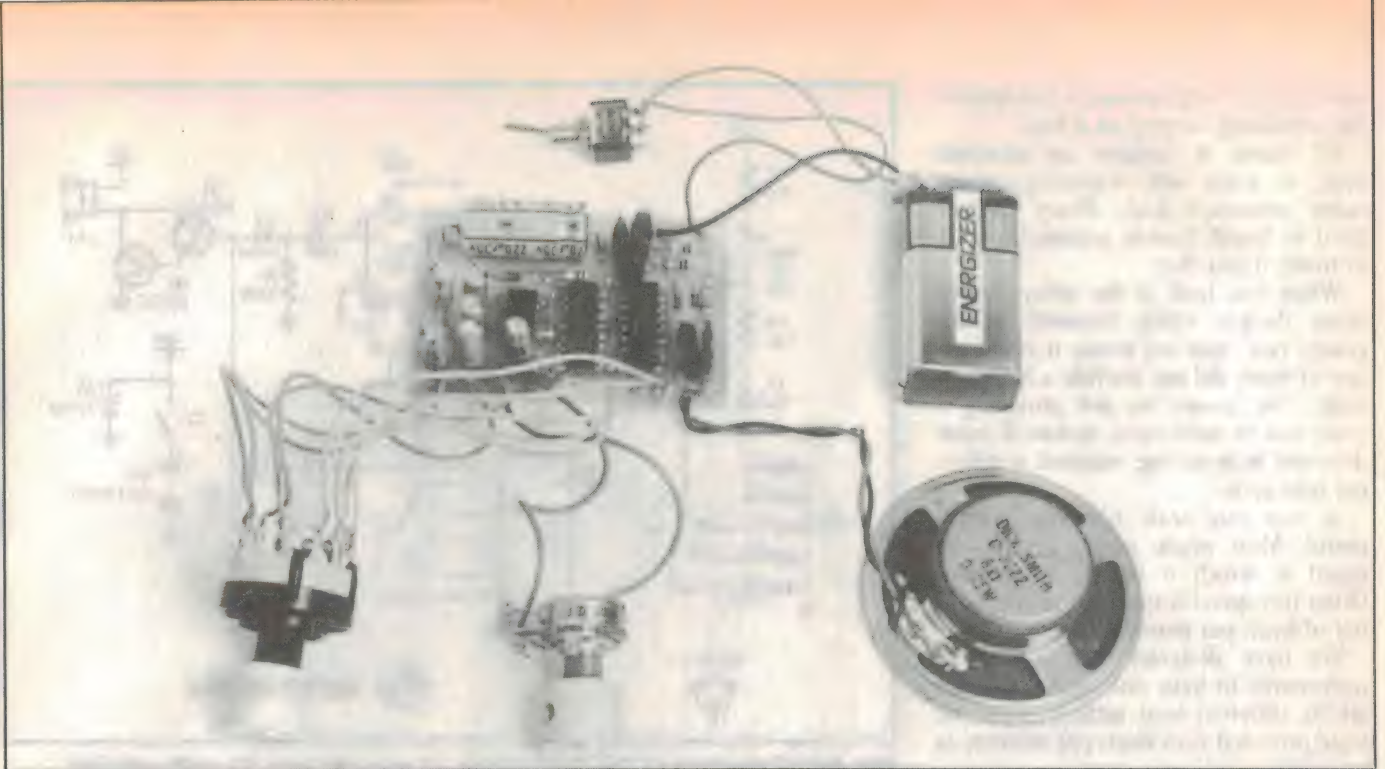

**The assembled metronome before it disappears in the box.**

thus between 0.5 and 4.2Hz. Counted per minute this is between 30 and 250 beats per minute.

One of our design specifications was that the accented beat rate should not change when the beat rate is changed. The background beat fills up the space between the accented beat with either nothing, one, two or three beats.


Thinking about this for a sec, you will realise that this means that the output frequency of IC1 has to be multiplied by either one, two, three or four as more background beats are added.

This beat signal is divided by 2 by IC2. This is a JK-flipflop which is wired as a simple divider.


IC3, a 4018, is a programmable divide by N counter. The division factor is programmed by feeding back any of the outputs to the data input. It is a very useful IC, as it can be programmed with division factors ranging from 1 to 10. In the given configuration its division factors are 2,4,6 and 8. These are selected by the four position switch S1a.

This IC has one peculiarity. When the division factor is changed during operation, then occasionally the counter misses one triggering and starts running out of pace in comparison to the output of the JK-flipflop.

In our metronome design we cannot allow this, as the background beat and the accented beat have to be synchronised. The cure is simple; the output signal of the programmable counter resets the JK-flipflop via C7,R3 and D1.

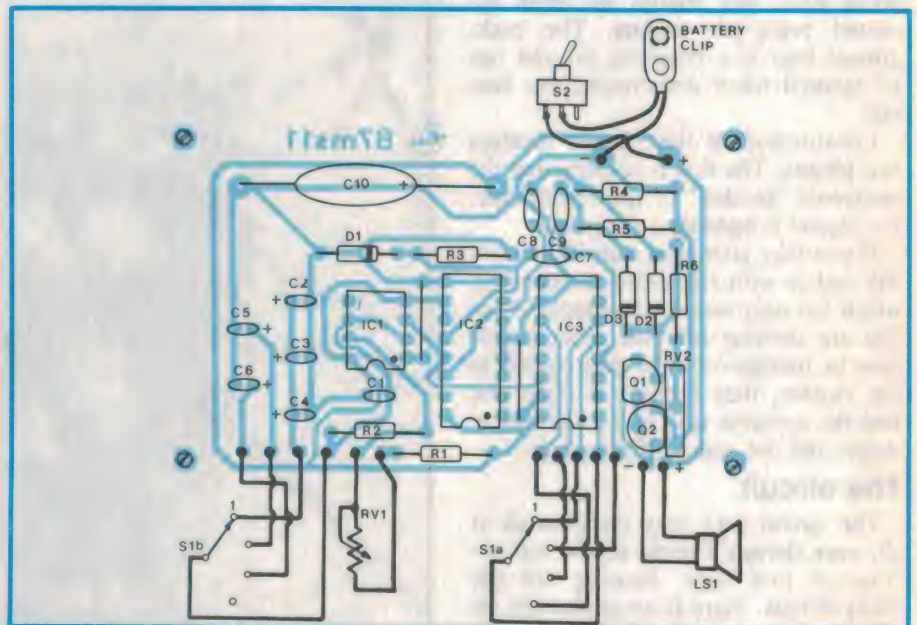

**Wiring diagram for the metronome. Take care not to invert the wires to the rotary switch.**

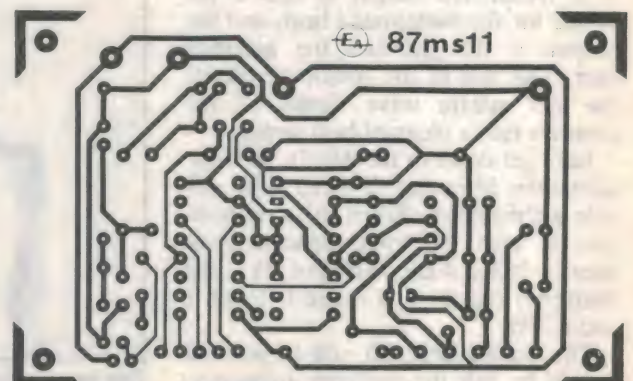

**Full scale reproduction of the PCB artwork.**



so that both dividers start their cycle at the same moment.

The square output signals of the counters are differentiated by the capacitor/resistor combinations C8/R4 and C9/R5. What's left after this stage are positive and negative spikes, derived from the positive and negative edges of the square wave signals.

The amplitude of the spikes depends on the values of these capacitor/resistor "differentiating" networks. With the given values, the accented beat spikes are higher than the background beat spikes.

The spike signals of the beat generators are rectified and mixed together by D2 and D3.

The resulting voltage spikes are amplified by the two transistors. The output signal can be attenuated by pot RV2.

Capacitor C10 buffers the battery as the very short output current pulses in transistors Q1 and Q2 are in amplitude quite high. This current would upset the logic without such a buffer capacitor.

## Construction

The construction of the metronome involves both crafting the box and the assembly of the PCB, as mentioned earlier. We'll start with the electronics.

The heart of this metronome consists of a printed circuit board (PCB) coded 87ms11. It measures 78 x 47mm.

The construction of the electronics is not very complicated. First mount the two wire links, then the resistors, diodes, the ICs, transistors, the capacitors and finally the trimpot.

The assembly does not involve any tricky soldering. Just take care with the orientation of the ICs, transistors, diodes and the electrolytic capacitors.

Before you connect the potentiometer, battery clip etc., you should work out how you are going to mount the metronome in the box.


Once you've worked out the mechanical details, you'll be able to determine the length of the wires going to the switch etc.

Connect the beat rate potentiometer, the battery clip, the On/Off switch and the accented beat switch. Take care when wiring up the latter, not to mix the wires up. The wiring diagram should provide all the information you need.


## Testing your ticker

Before you stamp "Tested and Approved" on the first part of this project you should try out the metronome.

Before you connect the battery, turn the trimpot (volume) and the beat rate

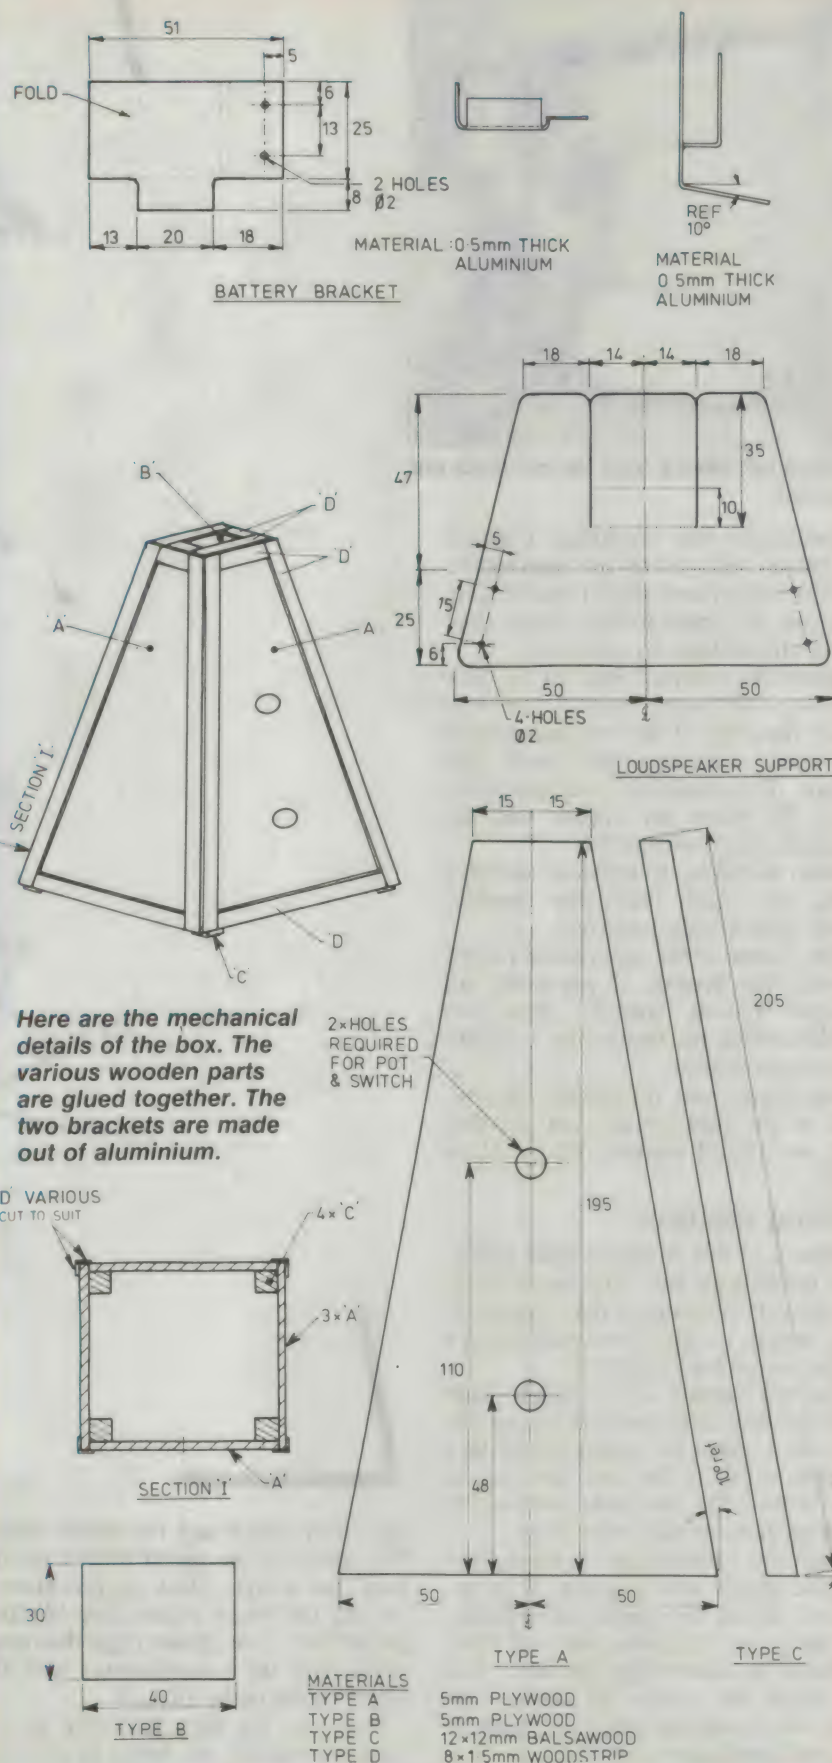



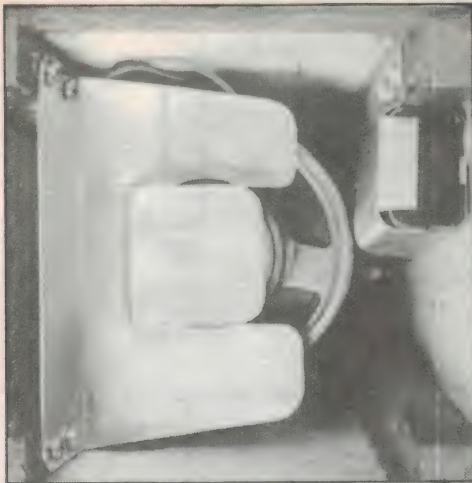

**Bottoms up! Here's how the brackets are mounted.**

potentiometer fully clockwise. Connect the battery and switch the metronome on. The metronome should start ticking at a high rate immediately. If not, then turn it off and look for the cause.

Switch the accented beat to the first position, where every beat is accented. Check the range of the beat rate control by simply counting the beats per minute. The maximum rate should be about 250 beats per minute and the minimum rate is around 30.

When switching to different accented beats, the main beat (the loudest) should maintain the same rate.

The volume of the metronome can be set with the trimpot. If you prefer an external volume control, then you should replace the trimpot by a 5k linear potentiometer.

You might want to increase the volume of the background beat. In that case you should increase C8 to 22 or 27nF.

### Making the box

Phase 2 of this project is quite important; building the box. You won't find it too difficult to construct this. Take your time though — glue or varnish doesn't harden as quickly as solder!

The box consists of five panels glued together; four sides and one on top. Inside, the corners are reinforced by four uprights which at the same time act as legs. Outside the corners are covered by beadings made of thin wood strips.

Begin the construction by sawing out the side panels with a jigsaw. It is important that all the panels have exactly the same size, otherwise you will have problems in assembling the box. You can adjust the panels by sanding the sides with a sanding block (a block of cork with sandpaper around it).

Drill the holes for the potentiometer,

the rotary switch and the on/off switch. We mounted the on/off switch on the back, out of sight. Both the potentiometer and the rotary switch have blocking projections. You should align the rotary switch and the potentiometer with the scales on the panel artwork.


Next saw the legs. It is wise to saw them off initially too large, so they can be adjusted at a later stage.

Have a good look at the mechanical drawing before you assemble the box. In particular look at section I. You'll see that the front and the back of the final box are larger than the sides.


The assembly of the bare box is done in two stages. Firstly glue the uprights to the front and the back panel. That makes two each. After the glue has dried, you can glue the side panels to

*EA*  
*Metronome*

**This panel artwork is reproduced a little oversize to suit different requirements. Trim it to suit yours.**



*Beat*

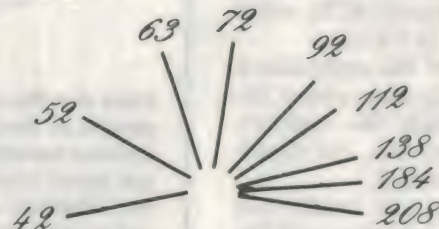

*Rate*



## Parts list

- 1 PCB coded 87ms11, 78 x 47mm
- 1 small loudspeaker
- 1 6 position 2 pole rotary switch
- 1 SPST switch
- 1 9V battery clip
- 1 9V battery 216 or similar
- 2 knobs

## Semiconductors

- 1 4018 programmable divide by N counter
- 1 4027 dual JK master-slave flipflop
- 1 555 timer
- 2 BC547 NPN transistors
- 3 1N4148, 1N914 diodes

## Capacitors

- 1 8.2nF metallised polyester
- 1 18nF metallised polyester
- 1 68nF metallised polyester

- 5 10uF, 16VW PC electrolytic
- 1 3.3uF, 16VW PC electrolytic
- 1 220uF, 16VW axial electrolytic

## Resistors (0.25W, 5%)

- 1 x 150, 1 x 1k, 1 x 1.8k, 1 x 10k, 3 x 100k
- 25k linear potentiometer
- 5k trimpot

## Box

- 900 x 100 x 5mm plywood
- 1000 x 12 x 12mm balsawood
- 2.5 meter woodstrip 8 x 1.5mm
- Glue, as used for wooden model aircrafts
- Woodstain
- Varnish
- 0.5mm sheet aluminium
- All the parts for the box should be available in hobby shops specialising in model aircraft.

## Miscellaneous

- Solder, wire, screws etc.

the front and back panels. This is probably the most tricky part of the whole operation. You might have to hold the lot until the glue has dried, or perhaps use some wood clamps if you have some laying around. Even stout rubber bands can be used.

When the glue has fully hardened you

can proceed by sanding down the top of the metronome until it's nice and flat. The top panel can now be glued to the box. The size of the top panel as given in the drawing is merely theoretical; check the actual requirements before sawing it out.

You can now adjust the length of the

legs by sanding them down (up?), so that the whole thing stands upright. By now a naked metronome should be standing on your bench.

As we wanted the panels to have a different colour from the beadings, we used two coats of woodstain to colour the metronome before mounting the beadings.

The wood strip used for the beadings should be cut with a sharp hobby knife. The strips are glued to the metronome.

Finally the metronome box should be finished with varnish. Perhaps you should try out the varnish on a bit of scrap wood; this to work out which treatment gives the best result.

The metronome box should now be ready and you can start building all the electronic bits and pieces into it.

For the battery we made a bracket. It is made out of 0.5mm aluminium, cut and bent into shape. In the same way we made a bracket for the loudspeaker. The sound output of the loudspeaker is directed into the box. The shape of the box improves the sound of the metronome. Both brackets are screwed to the balsa uprights.

Mount all the electronic bits in the box and there you are, the metronome is ready!

EA



# Altera opens all gates for engineers

Now, engineers can do more with logic design than they ever dreamed possible with the world's first family of erasable programmable logic devices (EPLDs).

Not only does the Altera family of EPLDs dispense with time consuming gate arrays or fuse programmable logic, but they are completely flexible.

Available in a range from 300 to 1800 gates, the Altera family from NSD provides EPROM flexibility, bipolar speed, the low power of CMOS, and a unique erasability feature which allows you to design a logic circuit from your IBM PC (or compatible), evaluate it, or even change it on the spot. It is just one of many reasons why Altera's new technology is the best friend an engineer ever had.

Call us today and find out for yourself.


**NSD** Hardie Technologies

VIC 205 Middleborough Road, Box Hill, 3128. Phone: (03) 890 0970  
Fax: (03) 890 0819

NSW Unit 3, 12 Victoria St. Lidcombe. 2141. Phone: (02) 646 5255  
Fax: (02) 646 5728

QLD 62 Doggett Street, Fortitude Valley, 4006. Phone: (07) 854 1911

SA 108 Gilbert Street, Adelaide, 5000. Phone: (08) 211 8499  
Fax: (08) 211 7292



MkAdd 7/34



**TRANSISTOR  
ASSISTED  
IGNITION**

Ref: EA January 1983  
Cat. KA-1506

**\$42.50**

**T.A.I.  
BREAKERLESS  
VERSION**

Ref: EA December 1983  
Cat. KA-1505

**\$44.95**

**12-230 VOLT  
INVERTERS**

40 WATT  
Ref: EA Aug 1985  
Cat. KA-1598

**\$99.95**  
300 WATT  
Ref: EA Sept 1985  
Cat. KA-1610  
**\$249.00**

**RAILMASTER  
TRAIN  
CONTROLLER**

Ref: EA September 1984  
Cat. KA-1560

**\$109.95**

**WALK  
AROUND  
CONTROLLER  
RAILMASTER**

Cat. KA-1559

**\$13.95**

**LIGHT  
CONTROLLER  
RAILMASTER**

Ref: EA February 1987  
Cat. KA-1563

**\$21.95**



**No1  
FOR  
KITS**

**STEAM SOUND  
RAILMASTER**

Ref: EA December 1984  
Cat. KA-1562

**\$22.50**

**DIESEL  
SOUND  
RAILMASTER**

Ref: EA Nov 1984  
Cat. KA-1561

**\$22.50**

**AMP MODULES**

ETI480 50 WATT  
Cat. KE-4050

**\$26.50**

ETI480 100 WATT  
Cat. KE-4052

**\$31.50**

POWER SUPPLY less Transformer  
Cat. KE-1018 \$29.50

**RING TONE  
CUSTOMISER**

Ref: ETI June 1987  
Cat. KE-4728

**\$39.95**

**SOLDERING  
IRON  
TEMPERATURE  
CONTROL**

Ref: ETI October 1986  
Cat. KE-4725

**\$35.00**

**PARAMETRIC  
EQUALISER**

Ref: ETI July 1986  
Cat. KE-4724

**\$23.50**

**RS232 TO  
COMMODORE**

ETI 1601  
Cat. KE-4722

**\$16.95**

**HIGH POWER  
MOSFET AMP**

225W 4  $\Omega$   
Cat. KE-1622

**\$99.50**

**RS232 TO  
CENTRONICS**

ETI 675  
Cat. KE-4666

**\$32.50**

**TEMPERA-  
TURE PROBE  
FOR DVM**

Ref: ETI July 1983  
Cat. KE-4033

**\$27.95**

**4 SECTOR  
HOME  
ALARM**

(Short Form)  
Ref: ETI May 1985  
Cat. KE-4698

**\$29.95**

**DIGITAL  
SAMPLER**

REF: ETI JUNE 1986  
CAT. KE-4720

**\$119.00**

**60W MOSFET  
AMP**

Ref: AEM July 1985  
Cat. KM-3010

**\$59.50**

**MICROWAVE  
OVEN LEAK  
DETECTOR**

Ref: ETI July 1979  
Cat. KE-4013

**\$17.95**

**SIGNAL  
SPEAKER  
PROTECTOR**

Ref: ETI October 1980  
Cat. KE-4023

**\$22.50**

**CDI KIT**

Ref: ETI Feb/March  
1985  
Cat. KE-4690

**\$79.50**

**FM MINI  
TRANSMITTER**

Ref: ETI December 1985  
Cat. KE-4711

**\$9.95**

**120W MOSFET  
AMP**

Ref: AEM July 1985  
Cat. KM-3012

**\$79.50**

**AUDIO  
CLIPPING  
INDICATOR**

AEM 6508  
Cat. KM-3054

**\$19.95**

**DUAL SPEED  
MODEM**

Ref: AEM December  
1985  
Cat. KM-3040

**\$169.00**

**NiCad  
CHARGER**

Ref: ETI March 1983  
Cat. KE-4029

**\$16.95**

**150 WATT  
MOSFET  
MODULE**

Ref: ETI March 1982  
Cat. KE-4220

**\$109.50**

**WORKHORSE  
POWER AMP**

50 watt rms/8 ohm  
Cat. KM-3050

**\$35.00**

**SPEECH  
SYNTHESISER**

Ref: AEM February  
1986  
Cat. KM-3042

**\$43.50**

**LISTENING  
POST**

Ref: AEM July 1985  
Cat. KM-3015

**\$39.95**

**ELECTRONIC  
STROBO-  
SCOPE**

Ref: EA August 1987  
Cat. KA-1688

**\$13.95**

**ETI 5000  
AMP  
UPGRADE**

(less MosFets)  
AEM6005  
Cat. KM-3056

**\$79.50**

**6000 AMP  
MOSFET  
MODULE**

Ref: AEM July 1986  
Cat. KM-3044

**\$119.00**



Ref: EA August 1981  
Cat. KA-1010

Ref: EA August 1983  
Cat. KA-1119

Ref: EA February 1984  
Cat. KA-1533

Ref: EA December 1981  
Cat. KA-1390

Ref: EA April 1982  
Cat. KA-1430

Ref: EA August 1985  
Cat. KA-1600

Ref: EA February 1984  
Cat. KA-1535

Bucket Brigade Delay  
Ref: EA June 1983  
Cat. KA-1522

Ref: EA April 1983  
Cat. KA-1508

Ref: EA May 1984  
Cat. KA-1550

Ref: EA August 1985  
Cat. KA-1595

Ref: EA January 1985  
Cat. KA-1582

Ref: EA September  
1982  
Cat. KA-1109

Ref: EA December 1985  
Cat. KA-1660

Ref: EA October 1986  
Cat. KA-1678

Ref: EA September  
1986  
Cat. KA-1679

Ref: EA January 1986  
Cat. KA-1626

Ref: EA November  
1985  
Cat. KA-1620

Ref: EA July 1980  
Cat. KA-1117

Ref: EA June 1980  
Cat. KA-1115

**\$119.95**  
POWER SUPPLY & TRANS-  
FORMER Ref: EA July 1980  
Cat. KA-1116 \$99.50

Ref: EA February 1986  
Cat. KA-1630

Ref: EA August 1986  
Cat. KA-1675

Ref: EA January 1987  
Cat. KA-1681

Ref: EA February 1987  
Cat. KA-1682

Cat. KJ-7000

Ref: EA March 1987  
Cat. KA-1687

Ref: EA August 1986  
Cat. KA-1674

Ref: EA May 1987  
Cat. KA-1683

Ref: EA June 1986  
Cat. KA-1670

Ref: EA April 1986  
Cat. KA-1645

Cat. KM-3016  
**\$29.95**

Cat. KM-3058

Ref: ETI July 1980  
Cat. KE-4014

Ref: ETI September  
1985  
Cat. KE-4708

**CAR ALARM**  
Ref: ETI April 1984  
Cat. KE-4678

**\$79.50**



## WHY NOT GIVE A MULTIMETER THIS CHRISTMAS

### • ECONOMY POCKET

- 2000Ω/volt
- size 90 x 50 x 30mm
- Cat. QM-1001

**\$17.50**

### • LOW COST

- 10,000Ω/volt
- 19 ranges
- Cat. QM-1015

**\$23.50**

**SAVE \$6**

### • WITH CONTINUITY BUZZER

- 20,000Ω/volt
- 10A DC range
- Cat. QM-1022

**\$39.95**

### • ELECTRONIC FET VOM

- Transistor tester
- Centre zero adjust
- Peak to peak & rms reading
- Cat. QM-1050

**\$79.95**

### • 10 AMP DIGITAL

- Transistor tester
- Vinyl case
- Cat. QM-1530

**\$89.95**

### • 10 AMP WITH CAPACITANCE METER

- Digital
- Transistor tester
- Vinyl case
- Cat. QM-1540

**\$129.00**

### • 4 1/2 DIGIT - 10 AMP

- Transistor tester
- Diode tester
- Data hold
- Cat. QM-1550

**\$179.00**

### • DIGITAL WITH FREQUENCY COUNTER

- Capacitance tester
- Transistor tester
- 20 amp current
- High impact case
- Cat. QM-1555

**\$159.00**

**SAVE \$10**

### "SPY IN THE SKY" SENSOR

The Pyroelectric infra-red sensor element is the 'eye' of a passive infra red detector. It measures 10mm high, 9mm wide and only 6.2mm deep. The IIRA-F001-P comes complete with full technical data including performance graphs. Information on the operating principle and two typical application circuits!

Typical Applications:

- Burglar alarms
- Proximity detectors
- Automatic door/shutter switch
- Toys, robotics
- Accident prevention/machine guard
- Electronic appliances
- Automatic lighting (in toilet?)

Cat. ZR-9500

**ONLY \$19.95**

**DIRT CHEAP!!**

**NEW**

## 50 & 100W MOSFET AMPLIFIER 'BRICK'

### NOT A KIT - INSTANT POWER!

At last, a good value AUSTRALIAN MADE amplifier module that is rugged, has the heatsink built in and is cheap!

The 'JAYBRIK' as they are called are basically rugged Mosfet power amplifiers manufactured to high standards on fibreglass board with a special DIECAST heatsink. All board components are enclosed in a special conformed coating that ensures that the amp will operate in extreme environmental conditions. If in the unlikely event of a repair being necessary the coating can be picked away and the offending component replaced. The Jaybrik will drive either 4, 8 ohms or 100V line step-up transformers and has unconditional stability. They are virtually bullet proof. They are ideal for professionals who need slave P.A. in a hurry or any Hi Fi or sound reinforcement application. You simply connect filtered DC and a signal to them and they are guaranteed to go!

So check out the specs. You will find them stunning for a PROFESSIONAL amplifier module.

# JAYBRIK

#### SPECS:

J-100 100W RMS min into 8Ω, with 45-0-45 3A transformer and 1 x 8000μF/75 filter cap each rail and 6A bridge rect. 45-0-45 is MAS permitted power supply voltage. (This will produce 30V across 8Ω which is 112.5W). Max off load volts! 125. Distortion: <0.1% max any frequency typ 0.06%. 0.018 @ 1kHz.

Frequency Response: 20 - 20kHz ±0dB (-3dB @ 200kHz)

Sensitivity: 850mV p.p. for rated output

Impedance: 47kΩ

S/Noise: Over 100 dB W.R.T. 850mV

Stability: Unconditional

Cat. AA-0382

**\$125.00**

J-50 50W RMS min into 8Ω, with 25-0-25 2A transformer, 1 x 4700μF/50V filter cap each side and 3A bridge rect.

All other specs the same or better than above.

(Filter capacitor values must be doubled for use on 4Ω loads)

Cat. AA-0380

No time for Pic. See next months ads

**\$99.00**

### 240V 3 PIN PLUG/ENCLOSURE


This enclosure which measures 78(L) x 50(W) x 40(usable depth)mm has a moulded 240V 3 pin plug insert which can be rotated thru 180° to allow the adaptor to mount in any of 3 positions (see fig #1). There is a generous space inside the box to fit relays, electronics, etc for whatever reason you like.

We expect that many mains powered magazine projects will require this unique Jaycar product!

Cat. HB-5950

**\$14.95**

**NEW**

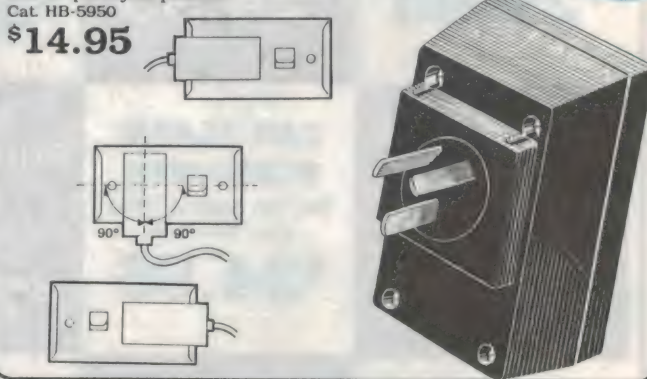

### SAVE ON POLYPROPYLENE WOOFERS

6" Woofer Cat. CW-2108

**\$29.95**

**SAVE \$10**

8" Woofer Cat. CW-2114

**\$39.95**

**SAVE \$10**

10" Woofer Cat. CW-2117

**\$57.50**


**SAVE \$12**

12" Woofer Cat. CW-2130

**\$64.50**

**SAVE \$15**

See our Cat for full specifications

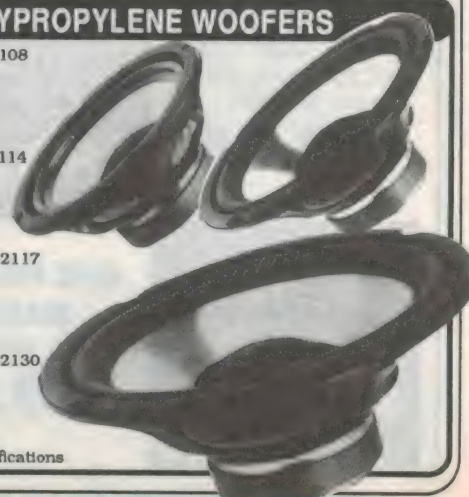



## MASSIVE SCOOP PURCHASE

### ROVER NEGATIVE ION GENERATOR

Yes, we've made another scoop purchase. These ionisers are 240 volt operated, draw about 1/2 watt, deliver about 250 billion ions per second, and cover about 25 square metres. It's even supplied with a Tester PC board and spare needles. If you've ever wondered about negative ion generators, this MUST be the time to buy one. These were selling for about \$80. Jaycar has a limited quantity available for:

Cat. YX-2905 **\$29.95** **SAVE \$50**



## SQUEAKY CLEAN MAINS FILTERS

TWO BRAND NEW MODELS, BOTH FULLY APPROVED BY THE ELECTRICITY AUTHORITY

### 4 OUTLET

The MS-4020 will supply up to 4 appliances. Each 240V socket is independently filtered from the other, i.e. interference from disk drives is de-coupled from the CPU power supply, etc. The filter will suppress interference from RF sources, spikes, transients and lighting, and supply up to 4 outlets with a total load of 10 amps. Cat. MS-4020

**\$269.00**




### 2 OUTLET

The two outlet will handle up to 7.5 amps and will suppress interference from RF sources, spikes, transients and lighting. The two sockets are not independently filtered although. Cat. MS-4025

**\$99.00**

**BEWARE!** There are many mains filters on the market. One sample we evaluated had only one capacitor in it!

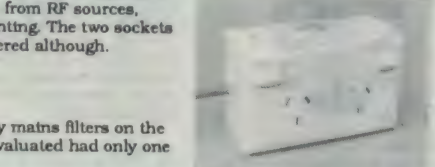

## PORTABLE GAS SOLDERING IRON

- No cords, batteries or gas bottles
- Heavy duty, tip temperature up to 400°C
- Adjustable temperature, equivalent to 10-60 watts
- Hard working, up to 60 minutes continuous use
- Refills in seconds, uses standard Butane gas lighter fuel
- No leakage current to sensitive circuits
- Made in Ireland


**WAS SELLING FOR \$59.95**

Jaycar introduces the product at a very realistic \$39.95

Cat. TS-1420

**\$39.95**

**NEW**




## GREY JIFFY BOXES

If you want some colour in your projects, try a grey Jiffy box.

Available in 3 sizes, all with ABS plastic lids.


Cat. HB-6021	UB1 (150x90x50)	\$4.25	\$4.00
Cat. HB-6023	UB3 (130x68x41)	\$3.25	\$3.00
Cat. HB-6025	UB5 (83x54x28)	\$2.45	\$2.25



## WIRE WRAP MACHINED IC SOCKETS

We have found it impossible to purchase wire wrap IC sockets lately. To remedy this we have introduced machined wire wrap style.

	Cat	Price	10 up
8 pin	PI-6491	\$1.75	\$1.65
14 pin	PI-6492	\$2.65	\$2.50
16 pin	PI-6493	\$3.25	\$3.10
18 pin	PI-6494	\$3.40	\$3.20
20 pin	PI-6495	\$3.50	\$3.30
22 pin	PI-6496	\$3.85	\$3.60
24 pin	PI-6497	\$4.40	\$4.15
28 pin	PI-6498	\$4.95	\$4.65
40 pin	PI-6499	\$6.50	\$6.20



**NEW**

## TV ANTENNA BARGAIN NORMALLY \$57.50

We have just purchased a quantity of VHF TV antennas from a wholesaler who is no longer in the TV antenna business. The antennas are a 7 element type suitable for metropolitan areas. They have excellent gain and directivity for areas with moderate signal strength! For coax use use outdoor balun Cat. LT-3026 \$3.75. Australian made. These will never be this cheap again.

Cat. LT-3166

**SAVE \$17.55**

**ONLY \$39.95**



## WORLD CLASS ADCOLA SOLDERING/DESOLDERING SYSTEM BARGAIN

We have purchased a quantity of these quality soldering stations and accessories, and can offer them at never to be repeated prices. Adcola have put their prices up recently, so these special prices represent a saving of about 40% on what you can expect to pay in the near future. See our catalogue for full specs on this fabulous soldering system.

### DEAL 1.

You get • Base station Cat. TS-1470  
• C17 Iron Cat. TS-1480

**• \$169**


Current price (before price increase) \$192

### DEAL 2.

You get • Base station Cat. TS-1470  
• C17 Iron Cat. TS-1480  
• Desolder tool Cat. TS-1476

**• \$224**

Current price (before price increase) \$261.95



Desolder tool on its own (if you already own the station) **\$59.95**

**SAVE \$10**

Cat. TS-1476

**SAVE HEAPS**


## NEW BOOK SHIPMENT JUST ARRIVED

(See our catalogue for full details)

BS-0402 Video cameras, theory and servicing	\$29.95
BS-0404 Introduction to automotive solid state	\$19.95
BS-0406 Soul of CP/M	\$39.95
BS-0408 Interfacing the IBM computer	\$32.95
BS-0412 Printer connections bible	\$29.95
BS-0416 Macintosh programming techniques	\$44.50
BS-0422 Computer connections solved	\$37.95
BS-0455 Understanding data communications	\$27.95
BS-0456 Understanding microprocessors	\$27.95
BS-0458 Understanding digital electronics	\$27.95
BS-0518 CMOS cookbook	\$23.95
BS-0522 555 Timer sourcebook	\$12.95
BS-0534 Design of PLL's	\$18.95
BS-0550 Handbook of electronic tables & formulas	\$34.95
BS-0580 Programming and interfacing the 6502 with experiments	\$28.95
BS-0582 How to program and interface the 6800	\$25.95
BS-0594 Z80 microprocessor handbook	\$21.95
BS-0596 Z80 microprocessor design projects	\$25.95
BS-0614 Electronic telephone projects	\$17.95
BS-0729 How to build speaker enclosures	\$14.95
BS-0733 Data communications, network and systems	\$75.00
BS-0736 MS-DOS bible	\$39.95
BS-0739 Best book of Lotus 1-2-3 (2nd ed)	\$26.50

## TAKE 20% OFF THE FOLLOWING BOOKS

	Was	Now
BS-0420 C programming techniques for Macintosh	37.95	\$30.36
BS-0703 Howard Sams crash course digital technology	\$34.95	\$27.96
BS-0720 Fibre optics experiments & projects	\$26.95	\$21.56
BS-0732 Complete guide car audio	\$19.95	\$15.96

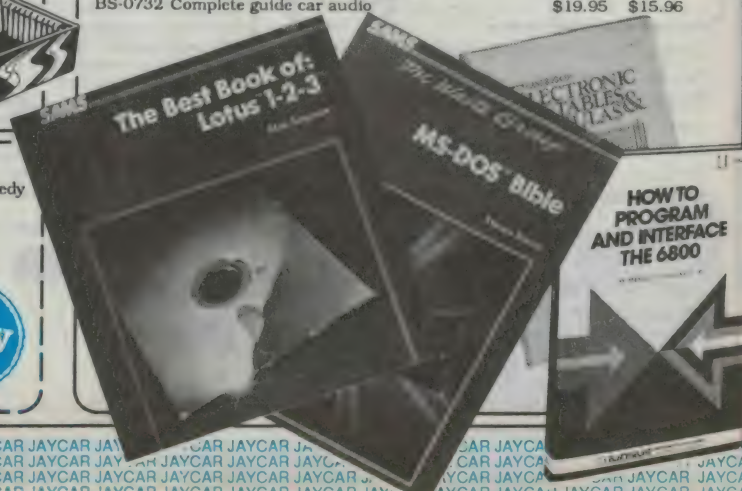



## TELEPHONE CALL DIVERTER

This unit enables you to divert an incoming phone call to another location. The diverter will divert either line (2 lines required) or will divert only one incoming line. There are many other features which you will find in the 1987 Jaycar catalogue.  
Cat. YT-6510

**ONLY \$199** **NOW AVAILABLE**



## CORDLESS PHONE

The fabulous Portable Telephone that you can take anywhere around the house, garden or swimming pool. Microprocessor controlled with a range of up to 250 metres and absolute clarity.

Features:

- Simple to use and easy to install - just plug in
- Operating range up to 250 metres (800 ft)
- Security code system with 16,384 combinations
- Call function at base unit to alert handset
- Pulse dialling with audible tone feedback at the touch of a key

Cat. YT-7065

**SAVE \$70 WAS \$269  
NOW ONLY \$199**



## AT LAST!!


### 4 PIN DISK DRIVE PLUG

We must be asked so many times per day for this device and now we have finally found it. Top quality Insulation Displacement type with positive locking cover which insulates termination area and acts as a strain relief.

Cat. PP-0920

**\$6.50**

**10 up  
\$6.00 each**



Government Instrumentalities, Schools, Public Companies.

If you wish to purchase from us, simply send us your official order and we will give you a complimentary 30 day account.

## FREE CATALOGUE

If you don't already own a copy of the Jaycar 116 page 1987 Engineering Catalogue drop into any one of our showrooms for a free copy. If you can't get in send a large SAE and we'll forward you one.

## ROBOTS ECONOMY "FRIENDLY LITTLE ROBOT"



Programmable via 8 key keypad on its "chest". Actions include music sound, flash 'eye' (light on head) turn in both direction, circle, etc. Will accept up to 18 consecutive entries.

Also features a tactile bumper switch and moveable arms

which can grip small objects. Measures 150mm diameter and 210 high.

Batteries extra \$4.75 - 4 x AA & 1 x 9V.

Cat. XR-1020

**\$49.95**

## COMPUROBOT


Very sophisticated, microprocessor controlled via 25 key keypad on robots 'head'. Up to 48 separate routines can be entered. Multi speed gearbox, travels in 4 separate directions, as well as angles and curves. It has lights and can make sounds. Hundreds sold to primary schools.

Batteries extra \$4.75 -

4 x AA and 1 x 9V

Cat. XR-1024

**\$69.95**



## COMPUROBOT 2

This highly sophisticated robot has it all. Programmable via a wireless infra red hand held controller with a 25 key keypad. 30 page instruction manual provided. Up to 64 program steps can be entered into its memory. Will go in any direction, as well as make different noises and flash lights. It has two motorised mechanical arms to carry a payload. The robot will draw with a crayon. It will carry the IR controller when not in use. Auto turn-off to save batteries. Size 230(H) x 210(W) x 175(D)mm. Rugged case, Japanese motors. Batteries extra \$6.33 - 4 x AA & 4 x C

Cat. XR-1028

**\$129.95**



**DIRT  
CHEAP!!**

## BARGAIN COMPONENT PACKS

80 Electrolytics \$10 Cat. RE-6250

150 Mixed Capacitors \$10 Cat. RE-6260

35 Pots, Trimpots, Sliders \$10 Cat. RP-3902

100 mixed Semiconductors \$10 Cat. ZP-8990

100 mixed BC type transistors \$11.95 Cat. ZT-2170

100 3mm & 5mm LEDs \$19.50 Cat. ZD-1694

100 mixed IC sockets \$24.95 Cat. PI-6490

50 assorted Pots \$7.95 Cat. RP-3900


50 assorted Resistor Networks \$10 Cat. RR-3380

Assorted Pot Cores \$9.95 Cat. LF-1280

20 Precision 1% & 2% Capacitors

\$12.50 Cat. RG-5198

25 RT Kermet Tantalums \$5 Cat. RZ-6692

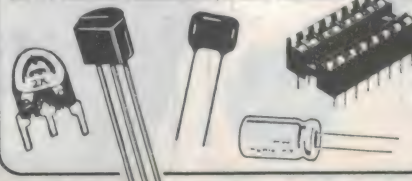

## STOP WATCH

Attractive all weather stop watch as well as a 5 function watch. (Day, date, etc) Complete with a generous length of knitted lanyard. Very easy to use.

Quartz controlled for greater accuracy.

Cat. XW-0380

**\$16.95**



## QUARTZ CLOCK/COMPASS ONLY \$5.95

**GREAT XMAS PRESENT FOR DAD**

This great small product has many applications. It's a quartz digital clock and a compass in one small, handy size.

Cat. XW-0250



## UNBELIEVABLE ELECTROLYTIC BUY

Through Jaycar's surplus stock buying scheme, we have purchased a substantial quantity of an electro that would normally be out of reach of the hobbyists pocket. This electro is made in Germany by ROEDERSTEIN!

## 6,800uF 63V LONG LIFE ONLY \$7.50!!

That's right ROEDERSTEIN brand long life, high ripple current etched electrodes, screw terminals - all class! And at a price below "Taiwanese". These are absolutely fantastic for power supplies for high power amps, etc.

Electrical to DIN 41332

Tolerance -10 +50%

Dimensions 50(D) x 80(H)

Terminal M5 screw

**QUANTITY  
DISCOUNTS**

1 - 5	\$7.50
6 - 10	\$7.00
11 - 24	\$6.50
25 - 99	\$6.00
100+	\$5.75

Cat. RN-6712

**\$7.50**



## TWEETY PIE

**ONLY**

**\$17.95**

This incredibly little piezo screamer measures 57(L) x 33(H)mm emits a 116dB wall. It's deafening! As used in the screamer car alarm kit.

Cat. LA-5255



## ULTRASONIC PEST & INSECT REPELLER

(Full details in the 1987 Jaycar catalogue)

Cat. YS-5510

**1/2 PRICE**

**ONLY**

**\$24.95**

**WAS \$55**







## INNER EAR MINI STEREO PHONES

Unique type headphones, so small they can be stored in a MATCHBOX. Very high sound quality and comfortable to use. Supplied with adaptor plug to 6.5mm and spare replacement ear pads. Cat. AA-2014

**\$8.95**



## INFRA RED PHOTO ELECTRIC RELAY

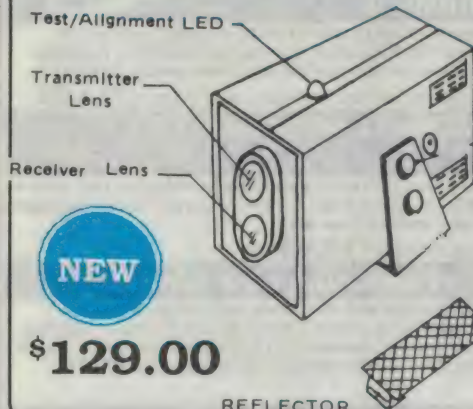

This is the device which makes all the noise when you walk into a shop. Mounts on one side of the door, and the reflector (which is supplied) on the other. It will sound when someone breaks the beam, or can be switched so it sounds for 5 seconds and then resets. 240 volt operating. Will operate up to 15 metres. Built-in buzzer (extension buzzer can be added) Size 90 x 143 x 190mm Cat. LA-5120

**NEW**

**\$129.00**

REFLECTOR

## TEXAS INSTRUMENTS CALCULATORS

### TI-1103


Handy everyday calculator in unique carry case! • Compact, economical eight digit, six function calculator with large keys • Full function • Automatic percent key, automatic constant, square root key • Automatic power down Cat. QC-7172

**\$15.95**

### TI30 SLR

Solar powered slide rule calculator. If you can see it has enough light to work. • Contains the advanced algebraic and trigonometric functions • Most needed slide rule functions roots, reciprocals, logs • Angular conversion for degrees, radians and grads Complete with vinyl wallet Cat. QC-7164


**\$29.95**

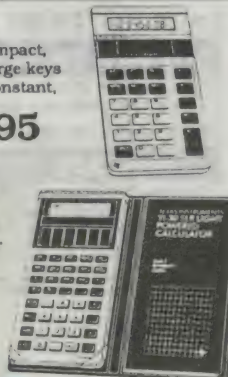

### TI-36 SOLAR

Performs 89 scientific functions, magnificent helpful guide book included! • Designed for high school and college students - scientific functions include logs, reciprocals, powers, roots, factorials, combinations, permutations, hyperbolics, complex numbers, polar/rectangular conversions and trig calculations including inverse in degrees, radians or grads • Statistical functions include mean and standard deviation, normal distribution • Enter numbers and perform calculations in binary, octal, decimal or hexadecimal number bases. Convert numbers. Perform mixed calculations. • Floating decimal, scientific notation or engineering notation. • 10 digit/2 exponent display • Low light solar cells • Guidebook, vinyl wallet and quick reference guide. Cat. QC-7170

**\$49.95**

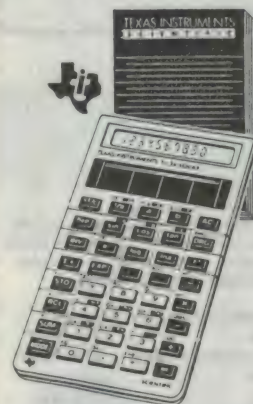

## PHOTO INTERRUPTER

This device enables you to turn a circuit on and off optically. It consists of a moulded plastic housing with an IR LED facing a phototransistor across a gap. Any object in the gap will interrupt the IR beam and consequently switch the phototransistor on and off. The device is very fast and ideal for counting, timing or sensing.


### FEATURES:

- PCB or chassis mounting
- Low cost
- Rugged one piece construction
- Very fast

### APPLICATION:

- Counter sensor
- Tachometer
- Opto ignition
- Edge sensor
- Tape end sensor

Full specs supplied with each unit. Cat. ZD-1901

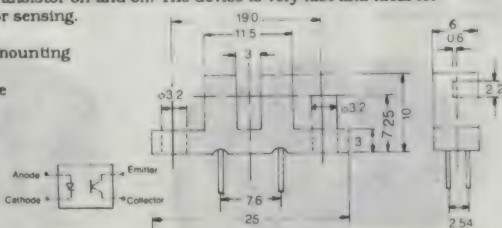

**\$8.95 10+ \$7.95**

## 30 + 30 WATT STEREO AMP

### INCLUDING PRE-AMPLIFIER

Fully built and tested with separate bass, treble, balance and volume controls. This superb amp has less than 0.1% distortion. There are inputs for microphone, phono and auxiliary (line) and all power supply components are on board. Just connect transformer, speakers and a signal - and away you go! Cat. AA-0300

**ONLY \$59.95**

Transformer to suit

Cat. MM-2010

**\$22.50**

## 6 WATT 'MICRO' AMPLIFIER 1 CHANNEL

### AMPLIFY YOUR WALKMAN!



This little amplifier will provide up to 6 watts into 4 ohms from a 15V power supply. Onboard volume control and high or low impedance inputs. 'Walkman' type 'low' and 'high' for standard line level signal sources such as tuners, VCR's, etc. (regard as AUX). Output is short circuit protected. A copper heatsink fin must be soldered to the top of the IC to achieve this.

### SPECIFICATIONS

Power Out 6W (max) into 4 ohms  
Input Sensitivity 100mV  
T.H.D. 0.3%  
Gain at 6V 38dB  
Power supply 4 - 16V @ 1-2A  
Cat. AA-0340

(Two required for stereo)

See our catalogue for other prebuilt modules in this range - preamps, power amp, sound switch, light switch, IR remote control, speaker protector, LED level meter.

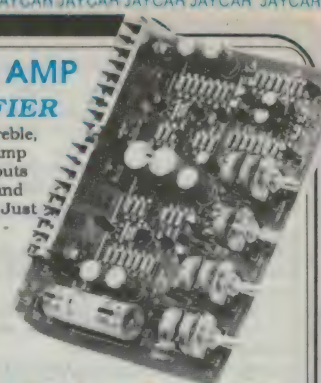

**\$15.95**

## LITTLE PROFESSOR

A marvellous way to teach young children their maths tables plus addition, subtraction, multiplication and division!

- Tables mode gives practice in math tables
- Comes with Little Professor Activity Book
- Your child gets two chances to solve the problem before Little Professor gives the answer
- Contains over 50,000 pre-programmed problems
- Makes learning what it should be - FUN!


Cat. QC-7160

**\$34.95**

## TI56 PROGRAMMABLE

Ideal for Tech Students, at a bargain price - factorials, imperial to metric conversions (or visa versa), engineering and scientific notation, integration, statistics, polar/rectangular conversions, stores a constant (even when off), algebraic operating system. Operates in proper mathematical order. 8 digits and 2 exponents. Degrees, radians and grads. Cat. QC-7174

**\$49.95**



**NEW**

## MORE VIATEL MADNESS!!

Yet another unbelievable deal.

Once again Jaycar has made a scoop purchase of - this time - Viatel ADAPTORS for your own TV set!

That's right, you connect them to your own TV via the antenna and to a telephone line as well. A nifty little infra-red wireless remote control is supplied so that you can operate Viatel from the comfort of your lounge chair!

We must emphasise that the goods offered are NOT BRAND NEW and are 'ex-rental'. They are in very good condition and fully operational when supplied. The adaptor will drive an RGB monitor as well as a telly. It also has parts for a tape recorder and printer and a socket for full QWERTY keyboard.

If you want to integrate VIATEL into your home entertainment system then this is definitely for you. Because of the compact size, this offer is available to Mail Order customers as well as our personal customers - but be quick!

Naturally, documentation is included.

Cat. XV-2210 inc remote control pad

**ONLY \$199**

Cat. XV-2212 Full QWERTY keyboard \$99



**DIRT CHEAP!!**











# A Universal Voice Operated Relay

*Are you an amateur or CB radio operator, who is sick of having to push a button on your microphone every time you want to transmit? Well, this simple device will take the drudgery out of talking for less than the cost of a new desk microphone!*

by MARK CHEESEMAN

One of the most convenient features of many modern amateur transceivers is a voice-operated switch or VOX. The use of such a device allows virtually hands-free operation of the radio, but unfortunately many amateur rigs and most CB units do not have this facility.

A voice operated relay is a rather simple device, which samples the sound from a microphone and switches a relay when the level of the sound from the microphone exceeds a preset level. The relay is held on as long as the sound level stays above that threshold. When the output level from the microphone drops below the critical level, the relay drops out again, after a delay period which ensures that the relay does not drop out between words or sentences.

However, when a voice operated relay is used with a transceiver, a further problem is introduced which can cause false triggering if not accounted for. When the radio is receiving a signal, this signal will be amplified and passed to the speaker so that you can hear it. Unfortunately, the microphone also picks up the sound from the speaker, but the unit normally can't distinguish between this signal and your voice.

To compensate for this effect, the speaker signal is also fed directly to the unit, and the level of this is compared with that of the microphone. The speaker signal then has the effect of raising the threshold at which the unit triggers. Thus, when the levels are properly set, the speaker signal will not trigger the unit, yet it is still possible to trigger it by speaking into the microphone even in the presence of a received signal. Because the speaker sig-

nal works against the VOX action, it is termed ANTI-VOX.

The easy to build voice operated relay presented here incorporates anti-vox circuitry, and features adjustable gain on the microphone and speaker inputs. The delay period before the relay drops out is also adjustable, to allow for varying gaps between words and syllables. It can also operate from a wide range of supply voltages, allowing the unit to be powered from the rig to which it is connected if this is convenient.

A switch on the front panel allows the VOX unit to be disabled if desired. If this switch is switched to the MOX (manually operated switch) position, the transmitter is keyed manually as if the

push-to-talk button on the microphone had been pressed. You may wish to use a switch with a spring return on the MOX side, to prevent the transmitter being inadvertently left on.


While the most common application of a voice operated relay is probably hands-free transmit/receive switching for a transceiver, the device is in fact operated by virtually any sound. It could therefore form the basis of an intrusion detection system, an automatic advance unit for a slide show, or possibly even a sound-activated flash trigger for photography.

## Circuitry

The microphone signal is AC-coupled to a non-inverting op-amp stage (IC1a) which has an adjustable gain of between 10 and 200, determined by the adjustable feedback resistor RV1. The non-inverting input of the op-amp is biased at half rail voltage, as the circuit runs from a single supply rail. The output from the op-amp is rectified and filtered by D1 and C3, to provide a DC signal which varies in proportion to the level of the incoming audio. The DC gain of the input amplifier is set to unity by C2. This means that the voltage appearing





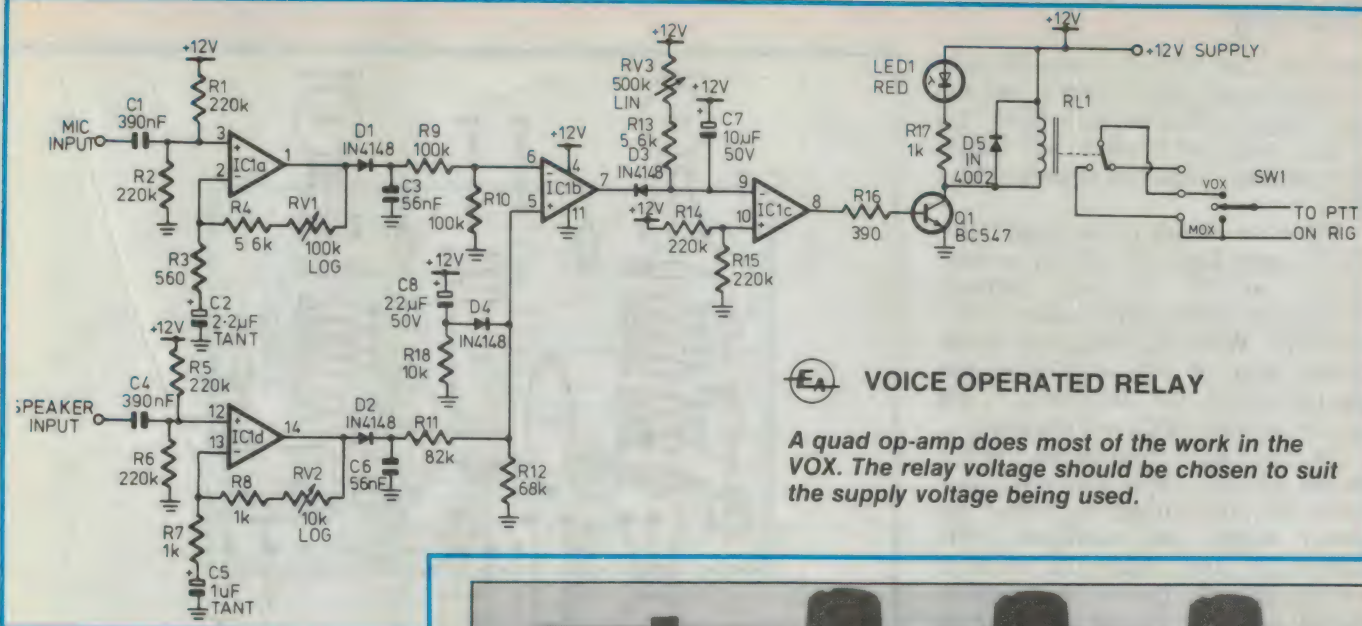


across C3 is half of the rail voltage plus the amplitude of any amplified microphone signal.

Similarly, the speaker signal from the receiver is AC-coupled by C4 before being amplified by IC1d. Note that the maximum gain of this stage is 10, as the speaker signal has a much higher level than the microphone. The output of this op-amp is then rectified by D2 and C6, giving a varying DC signal similar to the one derived from the microphone.

These two voltages are each fed to voltage dividers, set up so that with no signal applied to either input, the inverting input of IC1b is at a higher voltage than the non-inverting input. This voltage difference is the voltage rise which must occur on C3 in order to trip the VOX. Any increase in voltage on C6 results in this threshold being increased, and thus a larger signal is needed from the microphone to trigger the VOX.

In operation, the unit is set up so that any signal from the speaker produces the same change in voltage at the input of the comparator as the signal which the microphone picks up from the speaker. The time constants of the two filter circuits (C3, C6 and associated components) are set up so that the microphone voltage drops faster than the one from the speaker, in order to prevent false triggering.

When the voltage on the inverting input of IC1b exceeds that on the non-inverting input, the output of the op-amp will swing low, charging C7 via D3. As long as the microphone signal exceeds the pre-set threshold, C7 will be kept charged by IC1b. This keeps the

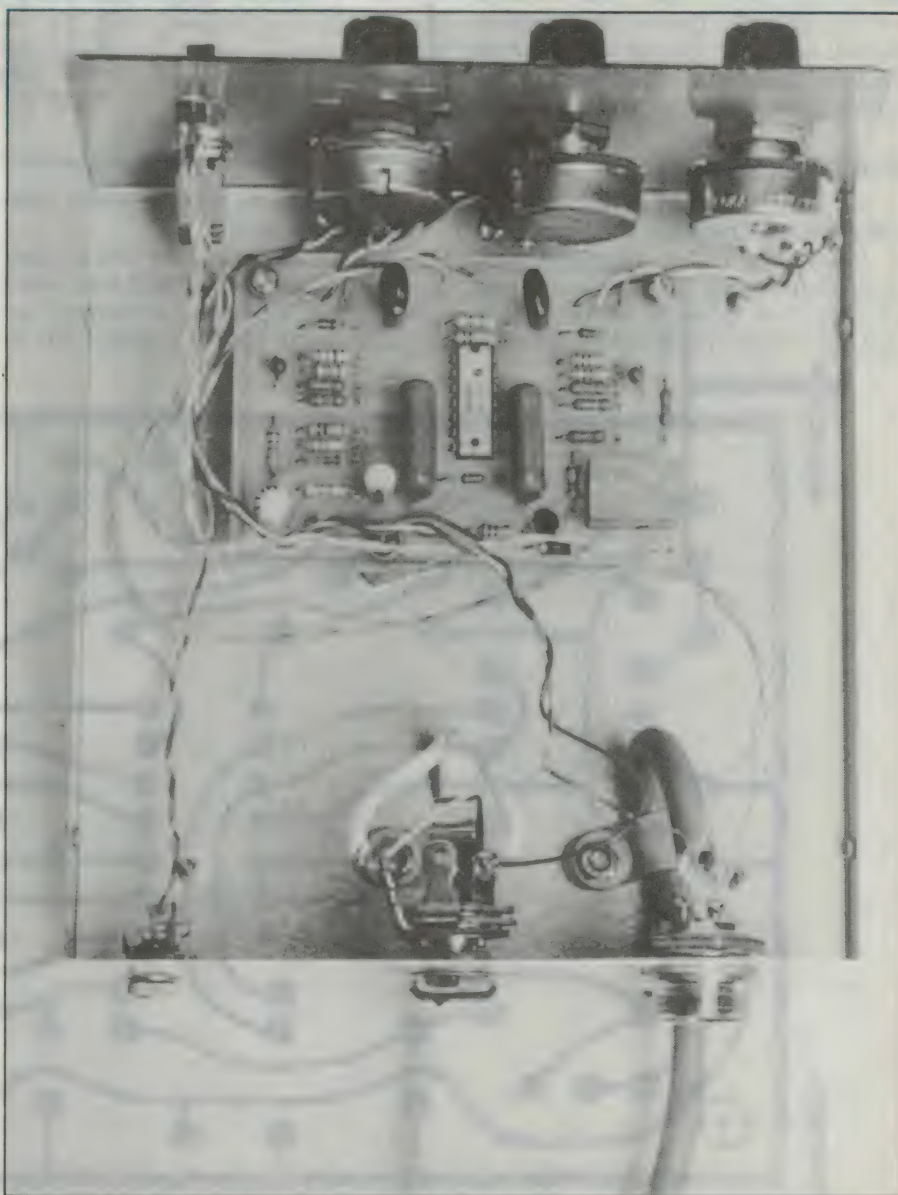

*The PCB is mounted in the front half of the box, supported by three plastic standoffs.*



## Relay


inverting input of IC1c below the non-inverting input, which is set at half the rail voltage by R14 and R15. While this is true, output of the IC1c will remain high, turning Q1 on and operating relay RL1.

When the output of the comparator (IC1b) goes high, D3 will be reverse biased, so C7 can only discharge through the series combination of R13 and RV3. When the voltage on the inverting input of IC1c rises above half the rail voltage, the output of IC1c will go low, turning off Q1 and the relay.

On power-up, C8 clamps pin 5 of IC1 to the positive supply rail, which prevents the VOX triggering before the power supply has stabilized. R18 charges C8 slowly, taking the anode of D4 to ground. D4 is then reverse-biased, and thus C8 and R18 have no further effect on the operation of the circuit.

## Construction


The VOX is constructed on a single sided printed circuit board measuring 54 x 78mm, and coded 87ra11. All the components except the switch and pots (if used) are mounted on this board, and the board should be checked for

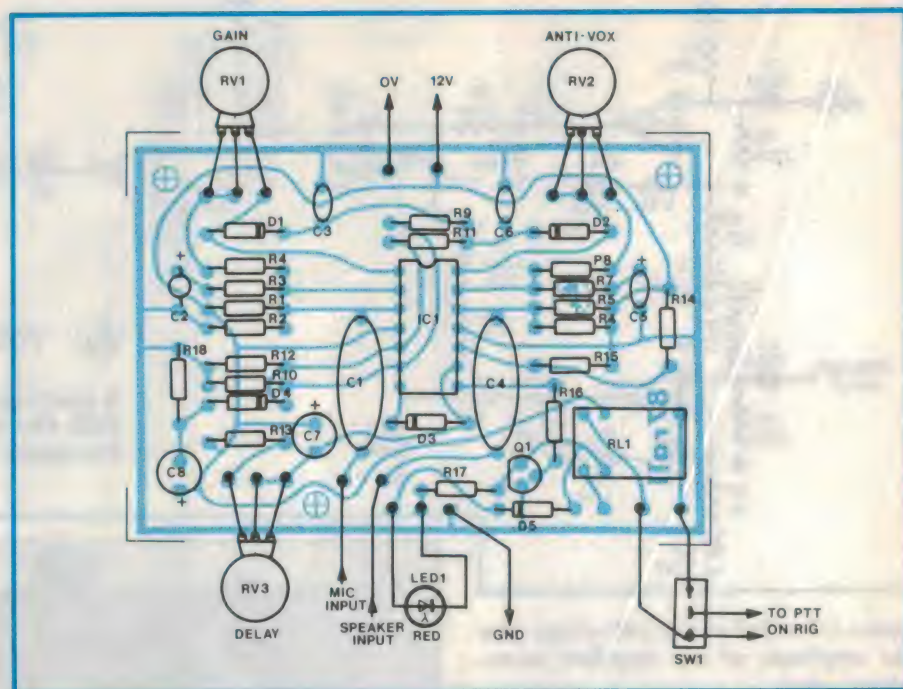

broken tracks or bridges before commencing construction.

The prototype was built into an inexpensive aluminium and steel box, which gives a neat appearance to the unit, yet provides some shielding against RF in-

terference. However some people may wish to build it into an existing piece of equipment (such as a transceiver or alarm unit). For this reason, the PCB layout is designed so that trimpots may be used in lieu of the panel mounted

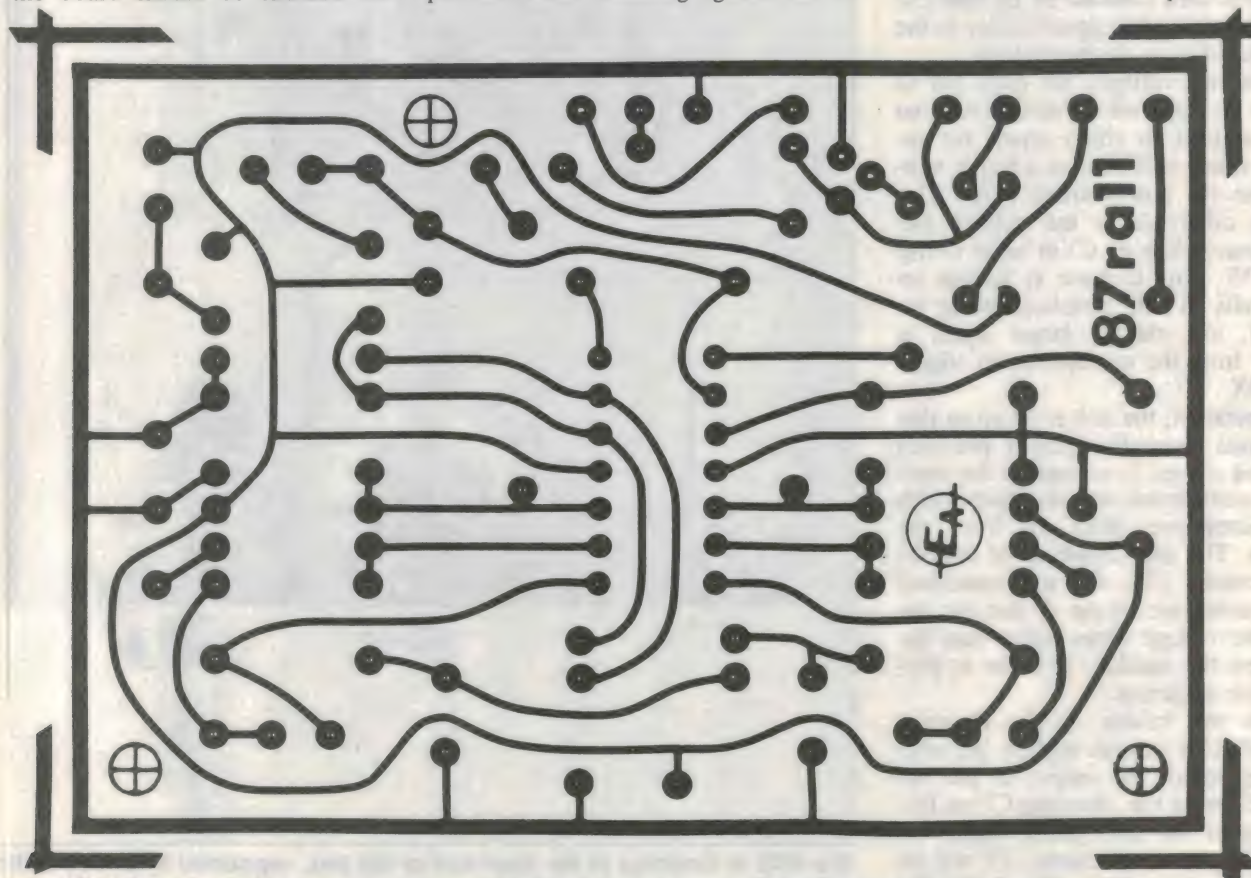

Here is a full-size reproduction of the front-panel artwork, for those who wish to make their own.



variety if desired. Although the internal size of the box is larger than necessary, the front panel is the required size, and there is room inside for further boards to be mounted here in the future.

Start with the lower profile components such as resistors and diodes, being careful to insert the diodes the correct way around. Also insert the tantalum and electrolytic capacitors, being careful with polarity here also. While it is normal to insert ICs last, it may be difficult in this case because of the rather large capacitors mounted close to the IC. Therefore, it is best to put the IC in at this point, making sure it is orientated as shown in the overlay.

Now insert the remaining capacitors and the transistor according to the overlay. If you are going to use trimpots they may be inserted at this point, as can the relay. If the VOX is only required to switch a low voltage to ground and less than 80mA is involved, the relay could possibly be omitted and the transistor used to switch the rig directly.

Using short pieces of hookup wire, connect the potentiometers to the PCB, allowing enough wire to reach the pots when they are mounted on the front panel. Also wire up the VOX/MOX switch and the input and output sockets. The choice of input and output sockets is left up to the individual constructor, as there is a wide variety used and it would probably be desirable to use ones which match those on the microphone and rig.

All of the pins on the microphone socket are wired directly to the corresponding pins on the plug, to carry the microphone signal to the rig, and to allow the push-to-talk switch on the microphone to operate normally. The same is true for the speaker plug and socket, as inserting a plug into the extension speaker socket of most receivers will disable the built-in speaker. Be sure also to use shielded cable for the microphone cable, to avoid hum and noise pickup.

Using the front panel as a template (or preferably a photocopy of it), mark out the front panel. Position the PCB in the bottom of the box and mark out the positions of the mounting holes, and also decide where to mount the sockets on the rear panel. Carefully drill and de-burr the holes, and affix the Scotchcal front panel, cutting the mounting holes in the Scotchcal panel with a scalpel.

The PCB may now be mounted in the bottom of the box, using short standoffs. It is suggested that you mount the board as close as possible to the front

panel, both to minimize the length of the connecting wires to the controls on the front panel, and to leave room for another board which you may wish to install at a later date. The pots and switch can be mounted in their respective holes on the front panel, and the sockets on the rear. The unit should now be ready for use.

The circuit will operate happily from any supply voltage from about 5 to 15 volts (in fact the prototype operated happily down to 3V!). If you are using a different voltage to that specified on the circuit diagram, make sure the relay used has a suitable coil voltage. The relay used on the prototype is also available with a 5V coil if needed.

## Adjustment and Operation

To use the VOX with a transceiver, connect the unit to the microphone and the rig, but leave the VOX switch on the centre (off) position. This disconnects the transceiver so that unnecessary transmissions are not made, but the LED remains operational for adjusting the unit. Speak into the microphone as you would during a normal contact, adjusting the gain control so that reliable triggering occurs.

Next, tune in to a transmission with the volume control of the receiver set to normal listening volume. Hold the microphone a little closer to the speaker than you normally would, and adjust the anti-vox control so that no triggering occurs. Finally, set the delay control so that the VOX will not 'drop out' between words or sentences.

## Parts list

- 1 PCB coded 87ra11
- 1 Aluminium case with steel lid, 134 x 150 x 76mm
- 1 Scotchcal front panel, 134 x 70mm
- 1 SPDT center-off toggle switch
- 1 12V SPDT PCB mounting relay
- 1 6.5mm Plug
- 1 6.5mm Socket
- 1 Microphone plug to suit rig
- 1 Microphone socket to suit microphone

## Semiconductors

- 1 LM324 Quad Bipolar op-amp
- 1 BC547 NPN transistor
- 4 1N4148 diodes
- 1 1N4002 diode
- 1 Red LED

## Capacitors


- 2 390nF greencaps
- 2 56nF greencaps
- 1 1uF tantalum
- 1 2.2uF tantalum
- 1 10uF 50VW electrolytic
- 1 22uF 50VW electrolytic

## Resistors (all 1/4W 5%)

- 6 x 220k, 1 x 560  $\Omega$ , 2 x 5.6k, 3 x 1k, 1 x 82k, 1 x 68k, 2 x 100k, 1 x 390  $\Omega$ .
- 1 500k linear pot
- 1 100k log pot
- 1 10k log pot

## Miscellaneous

Cable clamps, Rubber grommets, PCB standoffs, hookup wire.

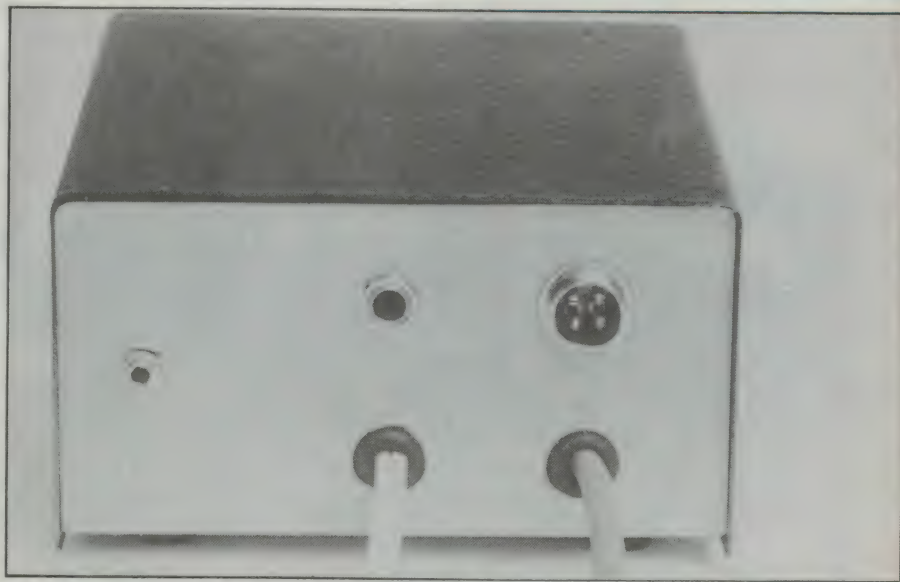

**The business end.** The cable on the right connects to the mic socket on the rig, and the one in the centre goes to the speaker socket. The mini jack on the left is for the power supply.



# Voice Operated Relay

Electronics  
Australia

## VOICE OPERATED RELAY

GAIN

ANTI-VOX

DELAY

MOX

OFF

VOX

*Here is a full-size reproduction of the front-panel artwork, for those who wish to make their own.*

The switch may now be set to the VOX position and the rig will be keyed whenever you speak into the microphone. The MOX position of the switch is useful if the microphone you are using does not have a PTT switch and you wish to leave the transmitter unattended but switched on, make sure you leave the VOX switch in the off position to prevent background noises (such as the 'harmonics') from trigger-

ing the unit.


If you wish to use the unit for a security related application, the anti-vox (speaker) input would probably not be required, unless the alarm sounder is located in close proximity to the microphone used to pick up the sounds. If this is the case, the anti-vox facility would be set up as above to prevent the alarm from triggering itself.

Note that a sound activated switch should not be used to trigger a very

loud alarm (such as a home burglar alarm) as there is too much possibility of false triggering (say, from cars, low-flying aircraft or earthquakes). It is more suited to applications such as a sound activated light or doorbell, which are less likely to make enemies of the neighbours.

In this application, a longer delay period would probably be required than that which is attainable with the component values specified. The delay time is determined by C7 and the total series resistance of R13 and RV3. Therefore, to increase the delay period, it is necessary to increase the value of C7 and/or R13. If a larger capacitor is used it will probably need to be placed on the back of the board as there is not much room on top.

The VOX may also be used to control a slide projector advance mechanism by connecting the relay contacts in parallel with the slide advance switch in the remote control unit. Because the VOX is capable of being triggered by any sound and not just a single tone, it is necessary to use a separate channel on the tape recorder to prevent the unit from being triggered by the program material on the tape.


This involves using a stereo tape deck, with the narration on one channel and the slide-advance information on the other. The advantage of this is that the advance information is not heard by the audience (which is rather annoying, to say the least), and also virtually any sound can be recorded on the other track as the frequency is not critical. 





# Two of our best Performers

NOW  
TURBOCHARGED  
TO 5MHz

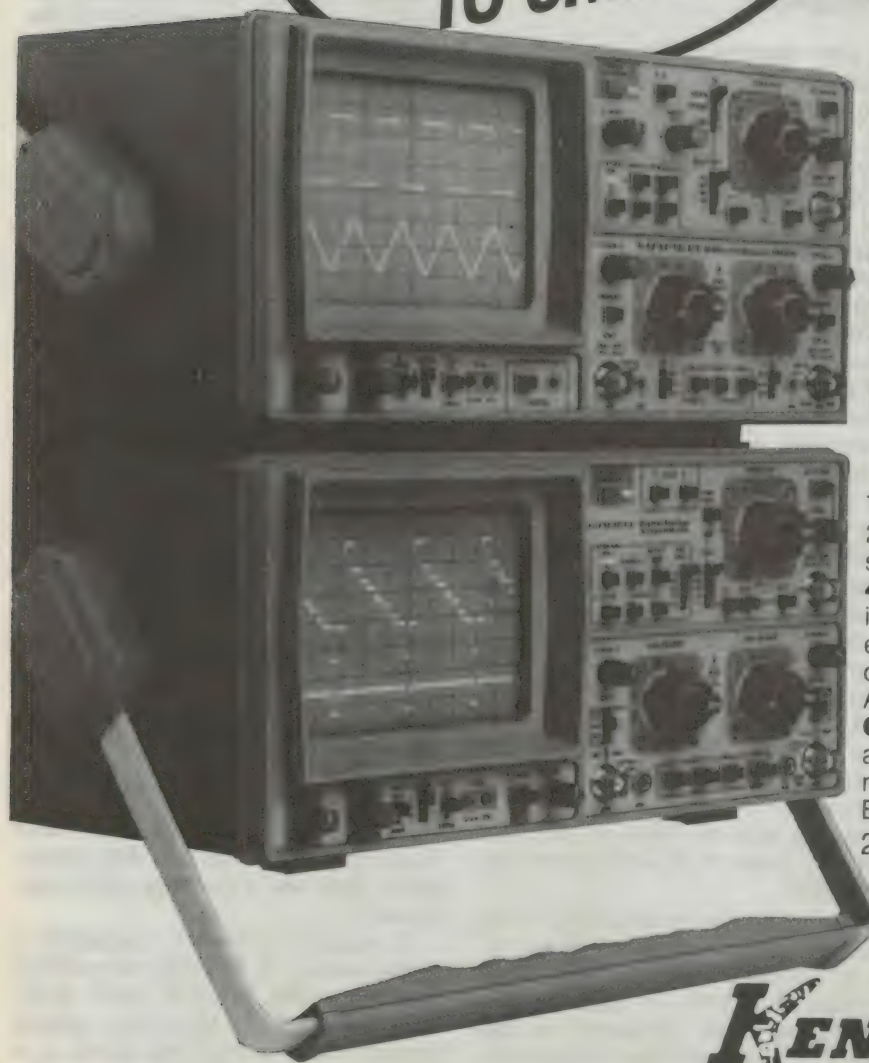

## HM205

an outstanding Oscilloscope with digital storage

This new oscilloscope offers all the features of a state-of-the-art **20MHz** realtime instrument. In addition it provides digital storage capability for signals between **50s** and **0.3ms** duration, with a max. sampling rate of **5MHz**. Especially when working with comparatively slow phenomenae, the **HM205** can easily replace considerably more expensive digital storage scopes. 2 Probes x 1/ x 10 incl.

## HM208

the high tech Storage Scope with 20MHz sampling rate

The **HM208**'s high sampling rate of max. 20MHz facilitates storing of relatively fast single shot events. Max. memory is **4096 x 8** bit, conveniently divided into two independent blocks. **XY-storage** capability enables easy viewing and recording of characteristic curves and Lissajous figures. An XY-recorder output and the optional **GPB-Interface** allow full integration in automatic measurement systems. With more than **5000** units sold, this is one of Europe's best selling digital storage scopes. 2 Probes x 1/ x 10 incl.

**KENELEC PTY. LTD.**  
(INCORPORATED IN VICTORIA)

VIC. (03) 560 1011, FAX (03) 560 1804 NSW (02) 439 5500  
QLD (07) 393 0909 SA (08) 223 2055 WA (09) 322 4542

WorkSouth 293



# Antennas for VLF reception

*With the current interest in VLF standard transmissions as references for frequency and time, the need for suitable antennas has also arisen. The writer has experimented with VLF antennas for a number of years and here are some suggestions which may be of use to interested readers.*

by IAN POGSON VK2AZN

Since I described the Omega Derived Frequency Standard in May 1987, the question of suitable antennas has come to the fore, with one enquiry coming from as far away as Singapore.

The ferrite rod antenna described in the above article was presented as a minimum, and could be used satisfactorily at least in all Eastern Australian States and possibly beyond. Having said that, it is recognised that there would be many locations where such a simple antenna would not be satisfactory. With this in mind and having spent considerable time in experimenting with and researching antennas for VLF (very low frequencies) the following are some of the results of those endeavours.

Although in this instance we are specifically interested in Omega signals on 13kHz, the comments are relevant for a frequency range of say, 10-30kHz. This covers all the Omega frequencies (10-14kHz) and many communications transmissions, including GBR (Rugby, England) on 16kHz and NWC (North West Cape) on 22.3kHz.

Let's start with the antenna described in May 1987. This type of antenna can be improved to a very worthwhile extent by increasing the physical size. As a first step, instead of using a rod 9mm diameter and 203mm long, we can use a rod with a diameter of 12mm but still 203mm long. This will give just a marginal improvement. So, as a starting point to improve the performance of the ferrite rod antenna, we should use 12mm rods in preference to the thinner ones.

A very worthwhile improvement in the amount of signal received is to use two rods butted together, thereby doubling the length of the unit to say, 406mm. A further improvement may be had by adding a third rod. Each additional rod results in an increase in signal pickup. However, we are faced with a condition of diminishing returns. Each added rod contributed less added gain than the one before it.

I have found that a maximum of four rods butted end to end are about as far as one can go. Any further additions are not really worthwhile.

Summarising, here are some suggestions for progressively larger ferrite rod loops:

1. With a single rod, either 9mm or 12mm diameter, 500 turns of 30 B&S enamelled copper wire. Terminate the ends by taping securely.
2. For two sections, wind the two rods separately, each with about 325 turns of 23 B&S enamelled copper wire.
3. For three sections, wind on each rod about 270 turns of 23 B&S enamelled copper wire.
4. For four sections, wind on each rod about 250 turns of 23 B&S enamelled copper wire.

The gauge of wire is not critical. It is preferable to use as heavy a gauge of wire as possible, consistent with fitting the required number of turns on the available rod length. Although it is not essential, it is a good idea to use some cardboard or plastic tubing which is a slide fit over the rods and put the winding on the tubing instead of winding it

directly on the rods.

After the rods have been wound they should be butted together, taped at the joins and firmly taped to a strip of wood about 30mm wide and 10mm or so thick and a little longer than the combined length of the rods. When connecting the windings in series, it is most important that they add inductively. This will work out correctly provided that all windings have been wound in the same direction.

Before leaving loop antennas, one which is well worth considering is the open loop or frame antenna, provided the extra space required is available. I have used such a loop for a number of years and it has greater signal pickup than the 4-section ferrite rod loop just described. Compared with the ferrite rod loop, the open loop has a lower Q and consequently it has a wider bandwidth.

The physical size of the frame antenna may be varied over a fairly wide range. As a rule of thumb, a turns-area figure of 100 square metres should be sufficient. This means that if you have a frame with all four sides one metre long, then 100 turns will meet this criterion. Variations each side of this figure could be expected to influence the amount of signal pickup accordingly.

My frame antenna has sides each 1.67 metres long and the winding has 48 turns. This comes out to a turns-area figure of 133. Incidentally, the frame does not have to be in the form of a square; a rectangle with a convenient ratio of say, 4:5 or 3:4 should be alright. Another option is to make the antenna in the form of a circle.


The construction of a frame antenna is largely a matter of individual preferences. However, a few suggestions may be useful.

A common method of constructing a frame antenna is to make the winding supports of two pieces of wood in the form of an X. From the centre, another piece of wood is fixed and serves as a stand for the assembly, finally, a flat piece of board may be used as a base. The base should be sufficiently large to







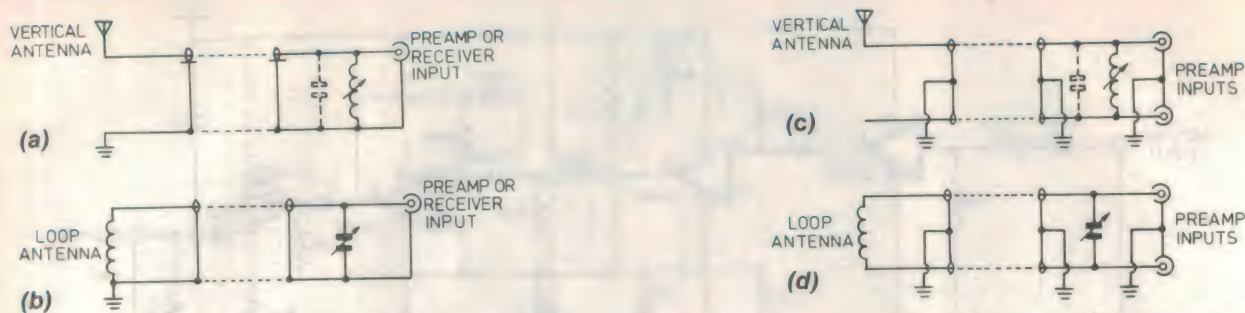

**Fig.3: These circuits show the alternative situations for vertical and loop antennas in the unbalanced and balanced arrangements.**

antennas have in common, is the fact that they are all small physically when compared to the very long wavelengths of the signals to be received. In order to make the antenna an effective signal gatherer, it must be tuned to the frequency of the wanted signal.

Ferrite rods, loops and the larger frame loops lend themselves quite readily to tuning, simply by adding the required amount of capacitance across the coil inductance to resonate at the frequency of interest. As is the case with the Omega Derived Frequency Standard, it is assumed that these antennas will be feeding into a high impedance, i.e.,  $1M\Omega$  or more.

As the antenna will normally be placed at a distance from the receiver and very preferably outdoors, a length of coaxial cable will be required between it and the receiver. The actual capacitance of the cable will be at least part of the needed capacitance, with the rest made up of good quality fixed capacitors. To make tuning that much easier a variable tuning gang, with the

sections connected in parallel, may be included. Any fixed capacitors and/or a variable capacitor may be conveniently connected across the cable at the receiver end.

Because of their small size, it is sometimes convenient to place a ferrite rod loop indoors. This may be quite satisfactory provided that the amount of signal pickup is sufficient and just as important, provided that the amount of electrical noise picked up from internal building wiring is not excessive.

Ferrite rod loops have a bidirectional pattern like a figure 8, with maximum response broadside to the rod's length, and minimum response off the ends. The frame antenna has a similar pattern, with maximum response in line with the plane of the antenna and minimum response from the sides.

Considering the situation for vertical antennas, quite obviously they do not have any significant inductance which may be tuned. Indeed, they are a very high impedance device as the length is very much less than a quarter wave-

length. The problem is readily solved by adding a separate coil. The coil is connected across the coaxial cable and it is tuned with capacitance in the same way as described for loops. The vertical antenna has its lower end connected to the top end of the coil which connects to the centre conductor of the coax.

There is an important point which must be observed with the coil used for this purpose. As well as having a high Q, the inductance must be as high as possible. Having determined the amount of capacitance provided by the coaxial cable, only a minimum amount extra should be added so as to make tuning convenient. This may be a variable gang as mentioned earlier. Again, the coil and capacitance may be added to the receiver end of the cable.

A suitable coil may be wound fairly easily. You will need a cardboard former 75mm long and large enough so that it will slide over a piece of 12mm diameter ferrite rod. Wind on the former 500 turns of 30 B&S enamelled wire, five layers each of 100 turns. Insu-

## PCBreeze


Create Single & Double sided PCB's quickly and easily.

### Features include

- \* 50 mil grid, up to 20x20 inches,
- \* Autorouting (with net list input),
- \* Block operations: Copy, Move, Delete, Save & Load (with rotation)
- \* Trace operations: Copy, Move, Delete all or part of a trace,
- \* Text and Silkscreen layers
- \* High quality output on a plotter
- \* Prototype quality on a dot matrix printer

### Requirements

256K IBM-PC or compatible, CGA or HGC graphics adapter, output from HPGL or DMPL compatible plotters & Epson FX type dot matrix printers

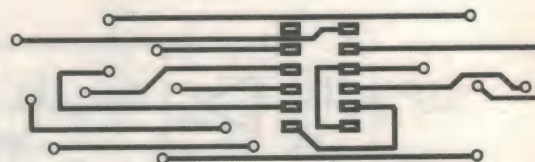

**\$200** (tax exempt)

To order or for further information

**Kepic** Pty. Ltd.

4 Steinbeck Place, Spearwood 6163,  
Western Australia.

ph: (09) 418 5512

(if applicable add 20% sales tax)



late between layers with paper. You will also need a piece of ferrite rod about the same length as the coil former.

With the coil and rod just described, the antenna may be tuned to resonance by sliding the rod inside the coil former. Using this approach the variable capacitor will not be required. Make sure that the ferrite rod used to tune the coil cannot pick up interference from mains wiring, etc.

Vertical whip antennas are omnidirectional and so pick up signals equally well from all directions. This also applies to the much larger top loaded T. There is one exception, the inverted L antenna has some directional properties. This applies particularly if the top portion is longer than the vertical part. The antenna then responds most strongly to signals coming from the direction opposite to the top section.

Once you have installed the best antenna which can be conveniently arranged and if the received signal is still not satisfactory, then it may be possible to remedy the situation by adding a preamplifier. Two circuits which I have used are shown, one fairly simple and another somewhat more ambitious.

The first circuit (Fig.1) consists of three ICs and a junction FET, together

with some components sprinkled around them. This circuit should be of sufficient help in most cases. An LM310 voltage follower IC provides a high input impedance with unity gain. This is followed by an LF351 op amp with variable gain. Following is another LF351 connected as an active filter, which performs the duty of a variable tuned circuit with low gain. Finally, the output is fed via a 2N5485 JFET as a source follower.

The second circuit (Fig.2) has a balanced input. This allows for a balanced coaxial antenna feedline to be used and so helps to reduce noise pickup on the feedline itself. The balanced input stage consists of two LM310s, and these are fed into the two inputs of an LF351 connected as a fixed gain amplifier. This is followed by another LF351 connected as a variable gain amplifier, followed in turn by a variable parallel tuned circuit. The output circuit is again a 2N5485 JFET connected as a source follower.

The tuned circuit just referred to consists of a 100mH inductance tuned by a 3-gang variable capacitor, with each of its 400pF sections connected in parallel. The inductor which I used as a potcore type and which was originally intended for use as a 9 or 10kHz whistle filter in

wideband AM broadcast receivers.

The balanced coaxial cable required for the preamp of Fig.2 consists of two identical lengths of cable, with the outer braids connected together and grounded. The inner conductors are the balanced line. In the case of a loop or rod antenna, the loop coil is simply connected between the inner conductors as shown in Fig.3(d). For a vertical, the antenna itself is connected to one inner conductor, while the other is simply left unconnected at the antenna end (Fig.3c).

The preamplifiers may be built up on a piece of Veroboard with a layout approximating that of the circuit diagram. The assembly may then be fitted into a small diecast metal box. Power from the main receiver could be used for the preamplifier.

An alternate scheme would be to design a PC board but at this stage I haven't had the opportunity to do this.

Much more could be written on the subject of VLF antennas. However the foregoing should give some useful pointers as the best way to provide antennas to suit individual readers' needs. Suitable ferrite rods may be obtained from Geoff Wood Electronics, 229 Burns Bay Road, Lane Cove West NSW. EA

## ELECTRONIC BROKERS AUSTRALASIA TEST EQUIPMENT

Australia's largest range of  
secondhand:

Hewlett Packard  
Tektronix  
Marconi  
Solartron  
Boonton  
BWD  
Brüel & Kjær

Oscilloscopes, sig gens, spectrum  
analysers, multi meters. Wide range  
of valves, coaxial connectors and  
test accessories. Repairs and service  
to all makes and models.

All types of equipment bought and  
sold.

### WE TRADE ALSO!

Calibration facilities available.  
Screened room and Vibration  
measurement systems for hire.  
Communication equipment,  
Scanners, Mobile Phones and  
accessories, Ham gear.

Agents for all Icom equipment.

Cnr. Barry Rd. and Brunsdon St.  
BAYSWATER 3153 VIC.

(enter from Brunsdon St.)

TELEPHONE (03) 729 0455

Mobile Phone 018 312 203



## TECHNICAL OFFICER (Electrical/Electronics)

Salary Range \$454.10 to \$524.50 p.w.

A unique opportunity exists for a person seeking to enter the prestigious and challenging field of Electrical Measurements to join the staff of one of Australia's leading Standardising Laboratories.

The Electrical Standards Laboratory of The Sydney County Council engages in the derivation of electrical quantities required for the precise determination of electrical energy and for the calibration of the wide range of Council's modern instrumentation. The laboratory is presently developing computer based systems to enhance these techniques.

The prospective applicant should have an Electronic or Electrical Engineering Certificate from a recognised college (or its equivalent), be self motivated and have experience in and an aptitude for electrical or electronics measurements and the use of personal computers.

On appointment, the successful applicant will be located at the Chatswood Testing Laboratories and be eligible for a range of attractive benefits.

**Applications or enquiries should be made by telephoning:**

**Mr. Ray Garrett, The Sydney County Council Testing  
Laboratories, 14 Nelson Street, CHATSWOOD.  
N.S.W. 2067, (02) 410 5171.**

**CLOSING DATE FOR APPLICATIONS  
MONDAY, 16TH NOVEMBER, 1987.**



## Hitachi LCD Drivers

HD44100 (FP60 package) 40 segment driver ..... \$12.00  
HD44780A00 (FP80 package) 16 digits (5x7 dots) 40 segment ..... \$12.00

## Hitachi Dot-Matrix L.C.D. Displays — complete with drivers

Bargains in alpha-numeric displays. Prices now slashed to clear — strictly limited stocks!!  
H2538A 40 pos. (40x1) \$80.00  
H2539 80 pos. (40x2) \$85.00  
H2535 32 pos. (16x2) \$40.00  
H2532A 16 pos. (16x1) \$35.00



## MAGNAVOX SPEAKER — WHAT A BARGAIN!!

Top quality 8" 8 ohm 20 watt Magnavox wide range twin cone speaker at massive savings. Stocks limited!!

**only \$8.50 each or 4 for \$30.00**



## Top quality "Soft" NiCad Rechargeable Batteries

The best there is in

NiCads.

type C

1.2V — 2Ah

**\$8.00 ea.**

type sub C

1.2V — 1.15Ah

**\$5.50 ea.**

**Hitachi Type AA 500mAh \$3.50 each**




## ICs and Semis at all-time low prices. We'll send the opposition into thermal runaway!!

6802 CPU	\$3.00
4164	\$2.95
2532	\$3.95
27128	\$10.50
5117/6116 P3	\$2.50
27256	\$10.00
21102/SR	\$1.00
2102L/SR	10 for \$2.00
25K216 MOSFET	\$2.00
3096 NPN/PNP Transistor Array	\$1.50
1488	75¢
1489	75¢
4N31 Opto-coupler	\$1.00
1458 D.I.L. or Can OP AMP	60¢
32.768KHz clock crystal	\$1.25
4001A	10 for \$1.00
4020A	10 for \$1.95
74LS112 Dual "JK"	
Flip-flop	\$2.50
74LS217 Trip. Input NOR gate	35¢
4539B Dual 4 ch. Data	80¢
CA3098 Prog. Schmidt Trigger	\$1.50
74LS163 Bin. counter Sync.	\$1.10
4503B Hex state N-1 buffer	45¢
4017B Hex D Flip-flop	85¢

## 68000 CPUs prices slashed

Hitachi chips at low prices. Normally selling for \$99.00 each. High performance 8MHz CPU chips.

**only \$45.00**



## RS232 Gender Changer

Top quality DB25 male to DB25 male or DB25 female to female

**only \$12.50 each**



# Give yours Sheridan's

## "THE ALPHAS" — CRAZY SPECIALS

Only while stocks last

"A"	Pye Cradle relays-4P c/o 24V c/w base	.45c
"B"	2N6211 PNP Transistor	50c
"C"	Resistor networks. 10 assorted, SIP and DIP	\$1.00
"D"	240VAC Garrard Turntable motors	\$0.75c
"E"	Transistors—BD679 Darlington NPN (TO126)	10 for \$2
"F"	BD262 PNP Darlington	10 for \$2
"G"	TIL312 Common anode 7 segment LED display	.60c
"H"	25K133 MOSFET (TO3 case)	\$3.95
"I"	25J48 MOSFET (TO3 case)	\$3.95
"J"	25K216 MOSFET (TO220 case)	\$1.50
"K"	2 'Vero' Instrument Case Handles	\$5.00
"L"	PC Mounting 5 pin DIN socket	45c
"M"	Pressure Mats 175 x 530mm	\$5.50
"N"	12 Digit seven segment displays inc. data	75c
"O"	Mini lamps, 28V/0.024A, wire leads	10 for \$1.00
"P"	NE2 90V neon lamps, wire ends	10 for \$1.00
"Q"	SPDT Momentary slide switch	50c
"R"	SPDT on-off-on lever switch	\$1.75
"S"	5 x 6.5mm enclosed switch stereo sockets	\$2.50
"T"	Zener Diodes, 51V 20W, Stud Type,	4 for \$1.25
"U"	GE Glass bead diodes 100V 2.5A	10 for \$1.00
"V"	Enclosed 3AG fuse holder	35c
"W"	1 pole 10 position Thumbwheel switch	\$1.00
"X"	BUX66 PNP Transistor	50c
"Y"	Spectrol 50Kohm 10 turn "Helipot"	\$5.00
"Z"	Transistor, BUX66, 200V/2A 35W PNP	10 for \$4.00
"AA"	2532—4K x 8 EPROM	\$3.95
"BB"	Large wound pot core a ssembly	\$1.00
"CC"	15 way 0.15" Edge Connector (ex-unit)	.35c
"DD"	10 assorted thermistors & VDR	\$1.00
"EE"	21 way polarised plug, socket and B/shell	\$1.75
"FF"	100 Poly. Insul. Washers	50c
"GG"	5 asstd. Multi-turn Trimpots	\$2.50
"HH"	10 asstd. Tag strips, 2 to 7 way	\$1.00
"II"	30 asstd. disc ceramic caps	\$1.00
"JJ"	Belling Lee size "OO" panel fusholder	30c
"KK"	4 wire-wound pot meters PCB 100, 220, 470 ohms 1K ohm	
"LL"	150 ohm 25 watt wire wound rheostats	\$1.50
"MM"	4 mini-trimcaps 15-60, 6-60, 12-75, 1-90pf	\$1.00
"NN"	Transistor type Var. Tuning Capacitor	\$1.25
"OO"	12VDC S/P c/o Open Frame Relays	50c
"PP"	Mini "Jones" 8 way plug, socket and Hood	\$2.25
"QQ"	Mini "Jones" 4 way plug, socket and Hood	\$1.75
"RR"	Lock-down car aerial, lead and plug	\$4.25
"SS"	12V Solid State DPST "LED" momentary pushbutton switch	\$9.95
"TT"	Transformer, 240V to 2 x 9V, 800 & 50mA	\$2.50
"UU"	6' Audio Lead, 5P DIN Plug to 4 x 6.5 mono plug	\$1.50
"VV"	6' Audio Lead, 5P DIN Plug to 1 x 3.5 plug	\$1.00
"WW"	Stainless Steel mini flat-nose pliers	\$5.50
"XX"	Pushbutton telephone unit (component value)	\$9.00
"YY"	10 16 pin DIL IC sockets	\$1.00
"ZZ"	10 40 pin IC sockets	\$3.75

Due to the very low budget prices of the above items, no credit card orders can be accepted. Cash or cheque only.

## Save 45% on Ferguson 240 to 110V Stepdown Trannies.

These fully approved 240 to 115V stepdown transformers normally sell for \$99.00. We have limited stocks at silly prices:

■ 240V to 115V stepdown

■ 125VA rating, fully enclosed with two pin US type outlet, 1.5A fuse on output

**only \$55.00**

## EX-TELECOM 'QWERTY' KEYBOARDS


We don't know much about these, but they contain approximately 90 PB keyboard switches (easily worth \$1.50 each), I.C.s and sundry components.

**only \$30.00 each**



## Jack comp from

Top qual  
■ Easy to connect  
■ Black  
■ EMI/RFI inner jac  
■ 2 drain added n  
■ Capa  
■ Chara  
■ Crosst  
time puls  
■ Propa  
**40 W**  
**\$5.80**  
**34 w**  
**\$4.80**



## EXCLUSIVE TO

## CPU Module 8088 install

Includes one Intel P-801 1 x 74LS04N, 1 x 74LS33 "RESNET", 1 x 40 pin wi  
The board measures 70 new and unused.


**only \$6.95**

Quite amazing value Limited stocks only.

## The Ultimate Controlled So Station

The Solomon electronic soldering station incorp electronic control, enab tip temperatures from 3 degrees F without the n heater element. Temper plus/minus 10 degrees (24V) and the tip is isol line. Electronic switching components from trans with mechanical switch  
■ Heater voltage 24V  
■ Heater power 48W  
■ Temperature direct re  
■ Constant temperatur  
■ Temperature continu

**only \$220**



Sheridan's prices are coming down



# Get a lift with new low prices!

## Shielded outer cables Hitachi

UL style  
termination to 0.050" I.D.C.  
protective outer jacket  
shielding via aluminium foil  
wires with tin overcoating for  
reliability  
capacitance 40pF/ft  
characteristic impedance 60 ohms  
attenuation 1.1 - 2.7%/10ft (10nS rise  
time)  
propagation delay 1.53nS/ft


only \$0.00 per metre

only \$0.00 per metre

ONLY 'SHERIDANS'

with 5MHz


88 CPU (socketed), plus:  
ON, 1 x 74LS273N, 1 x  
re-wrap IC socket.  
20 x 30mm and is brand



## Temperature soldering

temperature controlled  
operates sophisticated  
allowing the user to dial up  
from 00 degrees F to 900  
degrees F. Low voltage is used  
to protect sensitive  
components which occur  
in arrangements.

loading  
control  
adjustable



## Crouzet Synchronous Motors

A motor drive system for accurate time  
driving in instrumentation, machine and  
process control. 1000s of uses including  
robotics. 240VAC, 50Hz, 2.8W/15mA.  
Direction: Anti-clockwise, 60rpm

only \$6.50 slashed from \$10

## Computer Grade Electrodes at Rock Bottom Prices

Capacity	Volts	Make	DIA	Height	Price
470mfd	180V	Nichicon	330	30	\$2.50
500mfd	250	Sprague	35	85	\$5.00
9,100mfd	60V	Sangamo	50	110	\$9.00
10,000mfd	40V	Sprague	50	85	\$6.50
14,000mfd	25V	Sprague	50	85	\$5.00
14,000mfd	40V	Sprague	50	110	\$8.50
22,000mfd	10V	Philips	35	120	\$6.00
33,000mfd	16V	Philips	50	115	\$10.00
47,000mfd	25V	Philips	65	115	\$15.00
100,000mfd	10V	Philips	65	120	\$9.00

All are brand new, unused stock. Mounting clips and hardware  
are available for 50¢ per set.

## "D" type Connectors slashed. Lowest prices in Australia, by the truckload!

DE9P	9 pin male	\$1.10
DE9S	9 pin female	\$1.30
DE9P/RA	9 pin male right angle	80¢
DE9S/RA	9 pin female right angle	\$1.00
D9	Backshell	\$1.75
DA15P	15 pin male	\$1.75
DA15S	15 pin female	\$2.00
DA15P/RA	15 pin male right angle	80¢
DA15S/RA	15 pin female right angle	\$1.00
D15	Plastic backshell	\$1.50
DB25P	25 pin male	\$1.95
DB25S	25 pin female	\$2.10
DB25P/RA	25 pin right angle male	\$1.00
D25	Metallised Plastic Backshell	\$2.00
D25	Plastic backshell	\$1.75
DC37	37 Way, Plug, Socket & Back-Shell	\$5.50
DD50	50 Way Plug and Socket & Backshell	\$6.00
D940002	"D" Type Retaining Clips per pair	35¢

## E-cell Timers at timely prices

Plessey E-cells (type 560-0002). For  
timing, integrating and counting.


Case - silver

Anode - gold

only \$2.00

10 for \$17.50

inc data sheet



## 3mm Spiro band cabling at big savings

3mm Cable binding material at under  
wholesale! Grade U Spiro binding in  
boxes of 50 metres. Top quality from Bride  
and Brown.

only \$8.50

## Ferguson Power Transformer

PRI.1 0-110V-120V-130V, 50Hz  
PRI.2 0-110V-120V-130V, 50Hz  
SEC.1 8.5V at 10A  
SEC.2 15.5V per side C.T. at 1A  
SEC.3 14.5V per side at 0.5A  
Size: 95x90x80mm.

Further reduced from \$45.00  
UNDER HALF PRICE!  
- LIMITED QUANTITY

only \$35.00



Our competitor's prices are  
going through the roof!

## Sealed Lead-Acid batteries at baffling prices

The LCR series is a new type of  
sealed lead-acid rechargeable  
system. Withstands rough  
operating conditions, overcharge  
and overdischarge. Perfect for  
portable equipment,  
standby use, photographic,  
and security equipment.

Low internal resistance  
(40mohm)

■ Low self discharge (64%  
capacity after 12 months)

■ Excellent for standby use.

Expected float life  
greater than  
8 years

6V/1.2AH

only \$16.50

6V/3.2AH

only \$23.50

## Compo packs

And better value than ever! 1.5kg  
kilos of useful and hard to get  
components including:


- Diodes
- Transistors
- Capacitors
- Resistors
- Ferrites
- Potentiometers
- Edge connectors
- Switches
- Zeners
- 240VAC motor
- Relays etc., etc.

only 100 Packs available

at only \$15.50 +

P&P \$5.00

Worth at least \$60 - satisfaction  
guaranteed or your money back.



## Plessey Nickel Cadmium charger



Plessey has developed a charger  
specifically for professional users  
of ni-cad batteries. The A100 will  
charge single or multiple cells (up  
to 20) with capacities from  
100mAh to 7Ah at a charge rate  
of 10% of their rated output.  
Accelerated charging at higher  
currents is also possible.

■ will charge single cells or packs  
up to 20 cells

■ 7 switch selected, constant  
current charge rates - 10, 50, 100,  
120, 200, 400mA and 800mA

■ 240VAC operation

■ Extensive protection against  
short and open circuit

■ Automatic overload against  
cut-out and cut-in

Normally selling for \$216.00, but  
we have obtained limited stocks  
at massive savings.

only \$69.95

## Plessey Charger Cases

All aluminium construction, matt black  
cover, ready punched for switches,  
terminals, LED indicator. Perfect for  
small projects. 80mm(H) x 140mm  
(W) x 150mm (D).

only \$10 each

## SHERIDAN ELECTRONICS PTY. LTD.

164-166 Redfern St., Redfern NSW 2016.

Phone (02) 699 5922, 699 6912.

Mail Orders to: PO Box 229 Redfern NSW 2016.

**Note:** We accept Bankcard, Mastercard & VISA. However, we  
cannot give quantity discounts on Credit Card purchases or account  
orders. Minimum for account orders is \$50.00. Minimum order is  
\$10.00 exclusive of postage and packing. All prices include Sales Tax.  
Large and overweight articles sent Skyroad Freight Forward

**ALL PRICES ARE FOR THIS MONTH ONLY OR UNTIL STOCKS ARE SOLD.**

## Mail Charges:

\$5.00-\$9.99	\$3.50
\$10.00-\$24.99	\$4.50
\$25.00-\$49.99	\$6.50
\$50.00-\$99.99	\$8.00
\$100 or over	\$9.00

Large and overweight articles  
sent Skyroad Freight Forward.

## Trading Hours:

Mon-Fri	9am - 5.30pm
Thurs.	9am - 6.00pm
Sat.	9.30am - 1.00pm

## MANUFACTURERS

We buy large and small parcels of  
surplus ICs, transistors, capacitors and  
related electronic stock. Immediate  
settlement.

contact:  
**Mike Sheridan**



# DC Electronic Fuse

*Have you ever experienced trying to service existing equipment or get a new project operational, only to keep blowing fuses? Well, this low cost project is the answer.*

by **PETER HARRIS**

It is simple to build, easy to use, and should become a very useful piece of test equipment for the professional's workbench or the hobbyist's "shack".

It features fast and slow blow settings, manual reset button, LED "fuse tripped" indicator, two current ranges 0-1A and 0-10A fully adjustable via a pot and calibrated scale, and operates off a single 9V battery.

By the way, the Electronic Fuse has been designed by Altronics Distributors, of Perth WA, and this firm is able to supply complete kits for the project.

## How it works

The circuit can be broken up into four sections. These are:

1. Current Sense
2. Comparator
3. Trip and relay driver
4. Power Supply and Inverter

These will now be described in turn.

The current sense section comprises the low value resistors, and the current range switch SW4. With the switch in the 10A position, the input current will flow in through the relay contacts, through the switch and through the two 0.1 ohm resistors, back to the output terminal. When current flows through these resistors, a small volt drop is produced across them. The actual voltage will be  $I_{in} \times 0.05$  which equals 0.5 volts at 10 amps.

This small voltage appears across the 100 ohm trimpot RV1 which can be adjusted to calibrate the unit. With the switch in the 1A position the current flows through the two 1 ohm resistors. This means that to produce the same voltage drop, the current is reduced by a power of ten i.e., one tenth of the value of the 10A range or 1A. Note that the in-circuit resistance is now 0.5 ohms, not 0.05 ohms.

The comparator section comprises IC1, RV2 and associated components. The comparator works by comparing the two voltages at the inverting and the

non-inverting inputs. When the voltage on the non-inverting input exceeds that of the inverting input, the comparator switches its output high. The opposite input action will cause the output to go low again.

The reference voltage is fed into the non-inverting input (pin 3), and the current sense voltage is fed into the inverting input (pin 2). When the current sense voltage exceeds the preset level from RV2, the output of IC1 switches low.

The reference voltage is derived from the 5.1V zener diode ZD1, which feeds a voltage divider comprised of a 15k resistor and RV2 in a parallel with a 1.8k resistor. The maximum voltage available to the comparator is 0.47 volts. This means that the voltage at pin 2 must exceed 0.47V before the IC turns off. The 100 ohm trimpot RV1 is used to set the current sense voltage to exactly the same as the reference voltage. This sets the full scale current trip to 10A (or 1A in the case of the 1 ohm resistors).


The purpose of the 1.0uF capacitor (C4) between pin 6 and pin 2 is to provide high frequency feedback, to keep the system stable and to provide some noise immunity.

The trip and relay driver section is that associated with IC2a and SC1. When the output of the comparator switches low, the output of the inverter



*The completed unit, housed in a compact Jiffy box.*



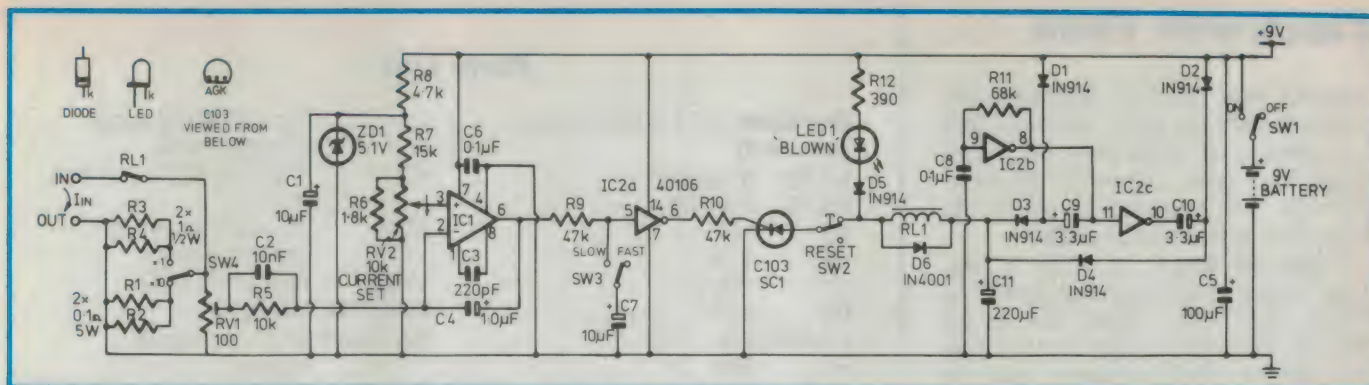

As you can see, the circuit is fairly straightforward, with two ICs and an SCR.

switches high (IC2a), which switches the SCR on. The only way to reset the SCR (i.e., turn it off) is to remove the voltage on the anode. This is done with a push to break switch. The SCR provides the earth for the "blown" or trip indicator LED and the relay.

The "slow blow" feature of the circuit uses the time constant formed by the 47k resistor R9 and the 10uF capacitor C7. Initially the capacitor is charged (output of IC1 high). When the comparator switches low, the capacitor begins


to discharge via the 47k resistor. When the voltage drops to 1/3, the inverter changes state and thus trips the SCR. The time can be adjusted by changing the value of the capacitor: the larger C7, the longer the delay before the fuse will trip.

The final section is the power supply and charge pump. The power for the circuit is derived from a 9V battery, and is decoupled by the 100uF (C5) and the 0.1uF (C6) capacitors.

Because the circuit runs on 9V, a

standard 12 volt relay will not work. As a 6V/10A relay is both expensive and hard to obtain, a small charge pump converter has been used to bring the 9V up to about 15V. The charge pump is formed from IC2b and IC2c, and associated components.

The pump works as follows. IC2b is configured as a CMOS square wave oscillator. The 68k resistor R11 charges the 0.1uF capacitor C8 until the upper hysteresis limit is reached, at which point the output goes low. The 0.1uF

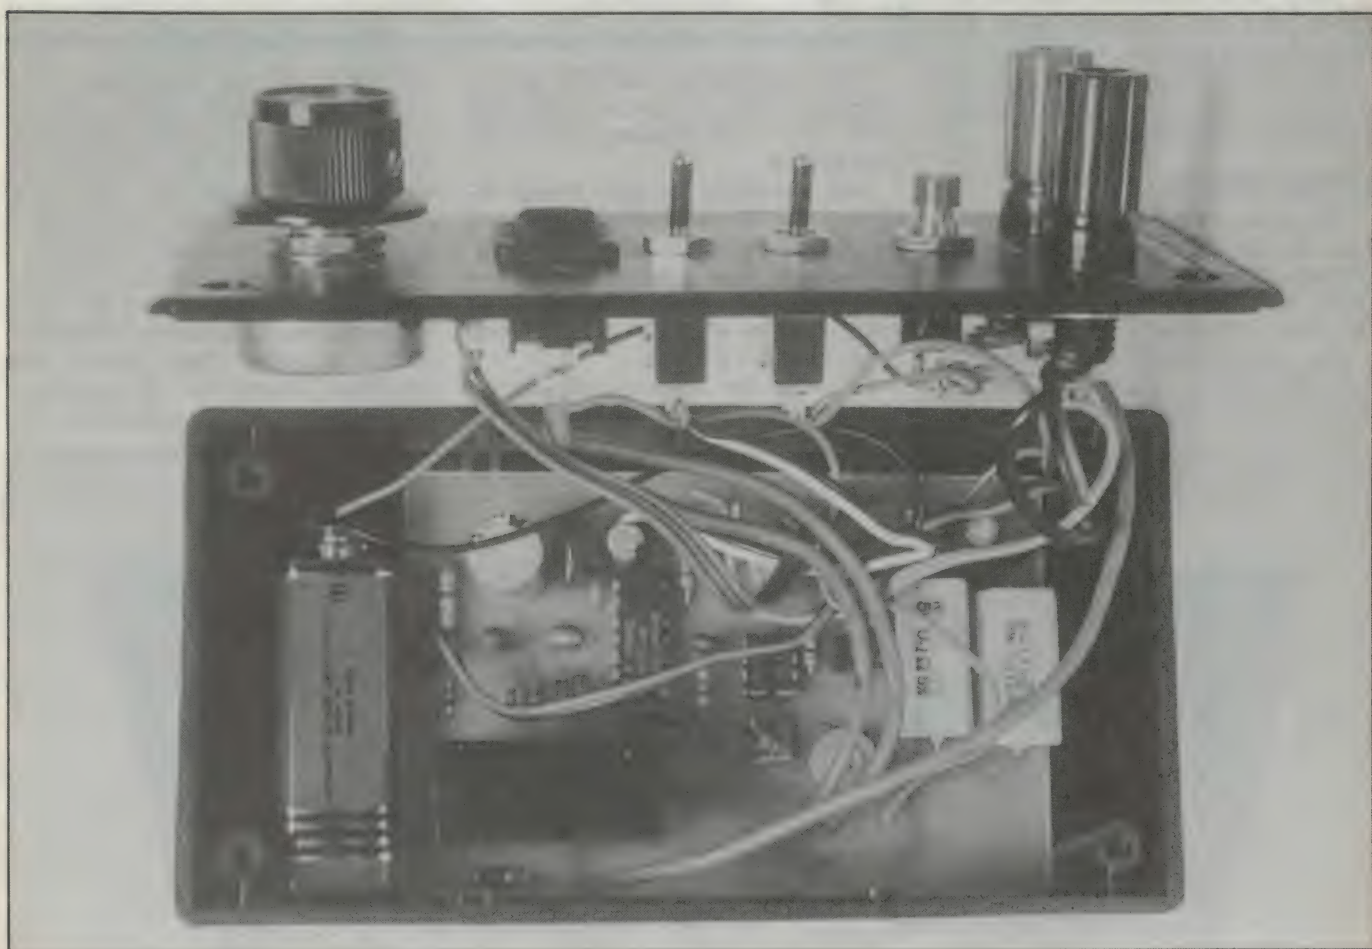

Inside the case, with most of the parts visible.



## Electronic Fuse

capacitor now starts to discharge, and continues until the lower hysteresis limit is reached — at which point the output swings high again, and so the process is repeated. The frequency at which this happens is approximately 68Hz.

When the output of IC2b is low, 3.3uF capacitor C9 is charged to 9V via 1N914 diode D1. When the output switches high, the voltage on the negative side of 3.3uF capacitor goes to +9V. This effectively "jacks up" the positive side to +18V (due to losses this voltage is about 15V). IC2c does exactly the same thing, but its output is 180 degrees apart, i.e., while one capacitor is charging, the other is supplying the load.

Both sides of the pump feed the 220uF capacitor C11, so that this develops enough charge to activate the relay (the charge pump does not have enough current capacity to drive the relay directly). Because the charge pump cannot supply much current, the voltage on the 220uF capacitor will drop to about 9V when the relay pulls in, but this is OK 9V will hold the relay in, but not enough to pull it in.

Note that the relay is wired such that it does not draw current until the circuit trips. This extends battery life.

### Construction

The construction of the Electronic Fuse has been greatly simplified by its mechanical design. It has been designed to fit into the Altronic H 0203 Jiffy Box, which measures 67 x 130 x 42mm.

The printed circuit board (PCB) just snap fits into the jiffy box, eliminating the need for spacers etc.

### Parts List

#### Resistors (All 1/4 watt unless specified)

R1,R2	0.1Ω 5W
R3,R4	1Ω .5W
R5	10k
R6	1.8k
R7	15k
R8	4.7k
R9,R10	47k
R11	68k
R12	390Ω
RV1	100Ω horizontal mount trimpot
RV2	10k linear

#### Capacitors

C1,C7	10uF/16V RB electrolytic
C2	.01uF green cap
C3	220pF ceramic
C4	1.0uF tantalum
C5	100uF/16V RB
C6,C8	0.1uF green cap
C9,C10	3.3uF/35V tantalum
C11	220uF/25V RB electrolytic

#### Semiconductors

D1,D2,D3,D4,D5	1N4148/1N914
D6	1N4001/2 etc.

ZD1	5.1V 400mW zener
SC1	C103/2N5064
IC1	CA3130 FET input op amp
IC2	40106/74C14 hex schmitt trigger
LED1,	Red 5mm LED

#### Switches & Relays

SW1,SW3	SPDT miniature toggle
SW2	Push to break momentary push button
SW4	SPDT 10A Rocker
RL1	SPDT 10A

#### Hardware

1 x Red binding post
1 x Black binding post
1 x Knob
1 x Battery snap
2 x Solder plugs
1 x PCB coded K-2535
1 x LED mounting bezel
1 x H-0203 jiffy box, punched and silk screened
Rainbow cable;
heavy duty hookup wire; solder, etc.


Prior to assembling the PCB just try snapping it into position to ensure that it fits. If it needs adjusting, now is the time to do it.

Start assembling the PCB by first installing the 1/4 and 1/2 watt resistors. Next insert the diodes, paying particular attention to their polarity. A point to note is that the 5.1V zener diode in some instances resembles a small signal diode, so take care here.


Following the diodes come the capacitors and the two ICs. Once again

take care with the orientation of the electrolytic capacitors and the ICs. Finally insert the SCR (again watch orientation), the trimpot, the relay, and the 5W resistor. With the 5W resistors, space them off the PCB by about 3mm or so, for better heat dissipation.

Once all components have been installed and soldered, check your soldering. Make sure you have not bridged or shorted adjacent tracks. Ensure that you have soldered to all component pads. Having satisfied yourself that all is

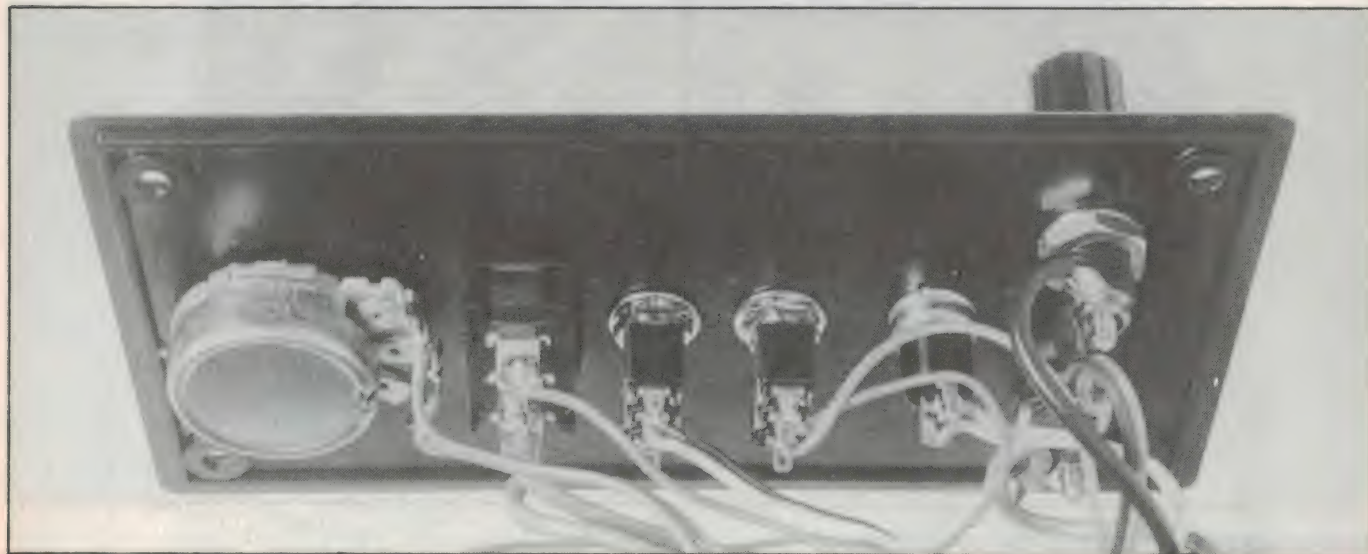



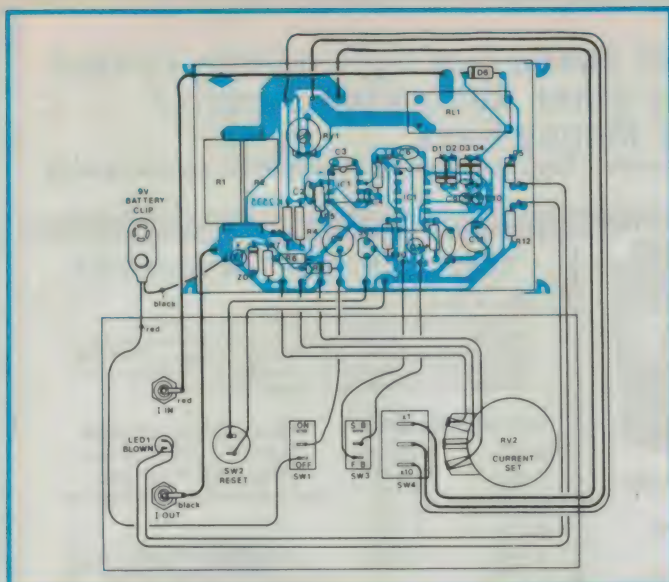

Specifications	
Current Rating	0-1A DC 0-10A DC fully variable
Max Voltage Rating	24V DC at 10A
Supply Voltage	9V alkaline cell
Trip Time	Fast Blow at 200% of rated current approx .75 seconds Slow Blow at 200% of rated current approx 2.5 seconds
Reset Time	Approx. 1 second — depends on battery condition
Accuracy	At half scale depends on calibration At full scale, 10% of indication
Terminals	Binding post/banana sockets

OK, place the PCB aside for the time being.

Next comes the front panel. This is simplified with the Altronics kit, as all holes are pre-punched and it is just a matter of positioning the parts as shown on the wiring diagram. Note: We used the Red terminal for the IN and the Black terminal for the OUT.

When mounting the binding posts, cut the non threaded section off with a pair of cutting pliers so that they will clear the PCB and power resistors. Do not use your side cutters, as they may break.

The rest of the front panel is straight forward and should not present any problems.

Finally comes the wiring. Following the wiring diagram carefully, wire the unit, using the appropriate size insulated hookup wire. Use heavy gauge wire for all the high current circuitry. This is indicated on the drawing. All the rest of the circuitry uses rainbow cable.

It is important not to make the connecting wires too long. Otherwise it will be difficult to fit everything into the box once it is all completed.

## IMPORTANT NOTE!

Please note that the project described in this article is designed to protect equipment and experimental circuits connected to a low voltage DC power supply. It is NOT intended to replace a fuse or circuit breaker in AC circuits operating at any voltage level.

It should not, in any circumstances, be connected directly to the 240V power mains.

With the wiring completed snap the PCB into the box towards one end. This leaves room at the other end for the battery which can be secured in a number of ways. In our prototype we used Blue Tac. Sponge rubber is also ideal, or it can be left as is and the pot will stop it travelling too far.

All that remains now is the set up and test procedure.

To use the electronic fuse, simply remove the equipment or circuit's existing fuse from its holder and clip the electronic fuse across it, connecting the IN terminal to the unfused side, and the OUT to the fused side of the circuitry. This can be determined by removing the fuse and switching the unit on. Then, by using your multimeter, measure the voltage on both sides of the fuse holder. The side that registers a higher reading is the IN side of the fuse.

Having connected the electronic fuse into the circuit, select the maximum current desired, switch the electronic fuse on and hit the reset button. With this done, switch the suspect unit on. If the suspect unit endeavours to draw more current than selected, the electronic fuse will trip.

**NOTE:** It is important that you connect the input to the fuse the correct way around, otherwise damage may result.

It should be noted that the electronic fuse is not a precision instrument, in the sense that if you dial up 500mA, it may in actual fact be 450 — 550mA. But its tolerance rating will be superior to that of a normal glass fuse.

To calibrate the completed unit you can either use a current limited power

supply or a standard power supply with a current meter.

Turn the fuse on and rotate the current control fully anti-clockwise. Set the trimpot for the mid position and the fast/slow blow switch to "slow".

If you are using a current limited supply, set its current limit to 0.5A.

Set the fuse to the 1A range and rotate the current control fully clockwise. Then connect the positive lead to the input terminal and the negative lead to the output terminal.

The relay should not trip. Now rotate the current control back until the relay clicks in; this proves that the unit works. Rotate the current control to the 1A position and reset the fuse, by pressing the reset button for a second. (Note that it takes about a second to charge the 220uF capacitor).

Continued on page 141

## “C” Compilers for Single-chip micros

**"C" Cross compilers for PC/XT/AT  
and VAX hosts by IAR for:**

★ 8051	★ 68HC11
★ 6301/6801/6803	★ 64180

**FEATURES:**

- ★ ANSI "C" standard
- ★ IEEE 32 bit floating point
- ★ Trig. exp. and log. functions
- ★ Easy interface to assembler
- ★ Produces compact, romable code

**Package includes compiler, assembler, universal linker, librarian and run-time library.**

**MACRO DYNAMICS** PTY LTD

*The Development System Specialists*

80 Lewis Rd., Wantirna South 3153.  
Tel: (03) 220 7260 Fax: (03) 220 7263



FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007

FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007



## Altronics Will Deliver Any Of These Quality Products To Your Door Faster Than Any Other Australian Supplier Or Your Money Back

(Within 24 Hours To Every Capital City and Suburbs - Allow Additional 24 - 48 Hours For Country Areas)

### SAVE \$\$\$\$ SAVE \$\$\$\$ Great Little PA Amplifier

This natty little amplifier includes some remarkable features which, until now have only been available on very expensive commercial items e.g. Balanced Mic Input. This enables you to run very long microphone leads without troublesome interference or hum pickup. **Balanced line output** - This enables you to run the speaker lines right alongside the microphone line without instability. **Constant voltage design** allows you to switch on one speaker circuit or all circuits together without any noticeable variance in output sound level.

**Output Power is a genuine 30 watts into either 100V line or 4 Ohms.**

A 2000 ..... **\$259**




**Super Compact Transformer**  
Delivers 12, 15, 24, 27, 30V  
At Up to 10 Amps  
Just The Shot for 12 & 24V  
Supplies & Charging;  
Circuits

### Multipurpose 120VA Transformer

Another Quality Transformer from Altronics. The M 2175 is wound on expensive grain oriented steel. Look at the size! Just 110mm Wide by 65mm High by 65mm Wide. Weight 1.25Kgs. M 2175

Primary 240V  
Secondary 1 0-12V @ 5A, 15V @ 4A  
Secondary 2 0-12V @ 5A, 15V @ 4A

1-9 **\$39.95** 10Up **\$35.00ea**



**Solder**  
200g Reel  
**\$7ea**

10 or More **\$6**




T 1200

### 20MHz Logic Probe

Input Z 1M Ohm. TTL Logic Hi LED greater than 2-3V. Logic 0 Lo LED Less than 30% Vcc. Min Detectable pulse width 30 nSec. Cat. Q 1272


**\$29.95**



### Horn Relay

12-16V coil 20 Amp  
Contacts **\$4130**

1/2 Price **\$3.75**

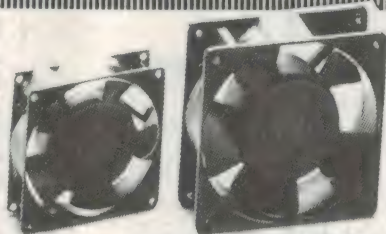

**Rugged Ultra Quiet- Now With Metal Diecast Frame**

### 240V High Specification Computer Fans

Durable Die Cast Aluminium Venturi PBT Plastic impeller of 94V-0 material. Shaded pole motor.

**80mm x 80mm x 32mm**


Air Flow 45 C.F.M. Input Power 16W Speed 2300 RPM Noise Level 31 dba. Cat. F 1020

**\$24.50ea 4 or More \$22.50**

**120mm x 120 x 38mm**

Air Flow 80C.F.M. Input Power 25W Speed 2600 RPM Noise Level 43 dbA. Cat. F 1030

**\$24.50ea 4 or More \$22.50**



### Fan Finger Guards

F 1022 (for 80mm Fan) **\$1.50**

F 1032 (for 110mm Fan) **\$1.50**

### 10 Watt Twin Cone Speaker 8" (200mm)

Great for PA, Background Music and HiFi extension use. Over 90,000 sold in Australia. Cat. C 2000

1-9 **\$12.95**

10 Up **\$11.00ea**



### 150W HiFi-PA Piezo

144.8 x 54mm Rectangular Piezo Horn Speaker suitable for HiFi and Sound Reinforcement. Full 90 deg. horizontal dispersion angle • Freq. Res. 3 to 40KHz •  $R_{in}$ : 110db @ 2.8V Cat. C 6120

**\$18.95 4 Up \$17**



### Toroidal Power Transformers

#### Why a Toroid?

• Smaller size and weight to meet modern "slimline" requirements • Low electrically induced noise demanded by compact equipment • High efficiency enabling conservative rating whilst maintaining size advantages. • Lower operating temperature • Simple, quick single bolt mounting.

#### 160 Watt Models

Cat.No.	SEC.V
M 3050	12 + 12
M 3055	18 + 18
M 3060	25 + 25
M 3065	30 + 30
M 3070	35 + 35
M 3075	40 + 40
M 3080	45 + 45

These are the Genuine English TOROIDS as Specified in various Electronics Australia Projects



**Dimensions & Weight**  
160 VA Models 110 Diam. 45mm H. 1.8Kgs. Leads 200mm  
300 VA Models 125 Diam. 45mm H. 2.5Kgs. Leads 200mm

**\$59.95ea**

5 Up **\$55.00ea**

#### 300 Watt Models

Cat.No.	SEC.V
M 3085	12 + 12
M 3086	18 + 18
M 3088	25 + 25
M 3090	30 + 30
M 3092	35 + 35
M 3100	40 + 40
M 3105	45 + 45

**\$69.95ea**


5 Up **\$65.00ea**

### Engineers Multimeter

**\$10 Off This Month**

Includes Continuity Buzzer

20,000 Ohms/Volt DC • 8,000 Ohms/Volts AC. Mirror back-  
ed scale • Overload protected. 10 amp DC current range.  
Unique carry handle doubles as a bench stand.



**RANGES**  
DC Voltage 2.5, 10, 50, 250, 1000V  
AC Voltage 10, 50, 250, 1000V  
Decibels -8db to +62db  
DC Current 5, 50, 500mA  
Ohm meter 0-6 meg.  
Ohms in 3 ranges, 50 Ohms centre scale.  
Size 135 x 91 x 39 mm

Includes Battery Tester

Q 1018

Normally **\$39.95**

**Now \$29.95**


### Why Risk Unnecessary Heart Attack?

Heart disease strikes down many people in their early 40's (or even 30's). The tragedy remains that had such victims been alerted, remedial medical, physical and dietary action could have been prescribed to avoid illness and in many cases restore full bodily health. X 3055

### Blood Pressure and Heart Rate Monitor

#### Features:

- Non-Microphone Measurement System
- LCD Readout
- Blood Pressure Monitor
- Pulse Rate Monitor



**Why Pay \$150?**

X 3055 **Only \$110**



BANKCARD HOLDERS — PHONE 008 999 007 FOR NEXT DAY JETSERVICE DELIVERY

## Get a System for Mum and the Kids Full Security System



Fantastic system for this price. Frankly we were amazed at the performance of this very compact system.

Very simple to connect and operate - New Technology has enabled very compact overall dimensions (master unit only 180 x 100 x 65) hence ideal for concealing among book shelves etc.

S 5310 ~~\$99~~ \$75

### Look At The Features

EXIT DELAY 30-35 secs. ENTRY DELAY 10 secs. DC SOURCE AC adaptor 240/9V DC Supplied BATTERY BACKUP 9V Nicad rechargeable- additional cost \$5024 \$14.50. AUTO RESET 3 minute operate cycle and auto reset RANGE Reliable to 30ft. (9M) LOW BATTERY INDICATOR included.

### Accessories Included for the One Low Price

4 Sets Reed Switches for Window/Doors. 1 Roll fig. "8" cable. 1 External Type Horn Speaker. 1 AC/DC plug pack adaptor. Now there is now excuse for not Protecting yourself, your family and all your hard earned possessions!

### Strobe Signal Lamp

Uses Xenon Strobe tube for High energy strobe flash output at a rate approx. 1 per second. Fantastic light energy output for the DC power used. DC input 12V 320mA Dimensions 97 dia. 90H

S 5450 RED  
S 5455 BLUE

Were \$24.50  
NOW \$19.00ea

Australia's Greatest  
Nicad Bargain

## MICRON NICADS

1-9 \$3.50  
10-99 \$2.95  
100up \$2.45  
Why Pay \$5?

## Magazine Binders for Your EA's and ETI's

Holds 12 magazines, each on a spring out wire rod. Just the shot for each years set of EA's ETI's or any of your favourite magazines. Cat. B 9999

\$8.50

## Phone Double Adaptor 1/2 Price

P 0995 \$4.50

## Sealed Lead Acid Batteries

These rugged high performance batteries are ideally suited for systems where uninterrupted DC power is required i.e. Security Systems, Computers, Solar Power Systems etc.




### Three Models To Choose From

S 5065 12V/1.2AH \$22.95  
S 5067 12V/2.7AH \$34.50  
S 5069 12V/4.5AH \$45.00

Fantastic for Heatsink Cooling with Amplifiers, Power Supplies, Inverters Etc.

## DC Brushless Fan

Electronically commutated DC Motor ensures low vibration and ultra Long Life  
120 x 120 x 38mm



Voltage 24V DC  
Current 330mA  
Speed 3100 RPM  
Air Flow 23 C.F.M.  
Noise Level 32dbA


F 1040

\$29.98

4Up \$28.00ea

## Quality Long Life Hand Tools

All stainless steel construction with insulated handles. Ideal for the hobbyist and tradesman alike.



Diagonal Cutter T 2700 \$9.95  
Flat Nose Plier T 2710 \$9.95  
Needle Nose Plier T 2720 \$9.95  
Curved Needle Nose Plier T 2730 \$9.95  
Buy the set of 4 for Only \$30 and Save

## Mylar Stereo Phones With Dynamic Mic


Simply Brilliant Mylar Stereo headset and Dynamic Mic combination. Phones 30-18KHz 28 Ohms, 6.5mm stereo Jack Max. Input 400mm Mic. 84db, 600 Ohms, 6.5mm Mono Jack

\$32.50 NOW \$29.50

C 9050



## New Model IRD Has Fantastic Range Infra Red Movement Detector With Two Mode Lens



### Features:

- Lens simply 'snaps' to either wide angle (range 40 feet) for normal use or Normal angle (range 80 feet plus) for corridor applications.
- Snazzy integral mounting bracket allows corner 90 deg. mounting as well as normal surface mount. (This is a fantastic feature as these work best in corners and are visually unobtrusive)
- 12V DC Powered
- Built-in test lamp
- Alarm output SPDT 30V 1a

S 5301

Why Pay \$150 or More

Our Price \$99ea


10 or More \$90ea

N.B. These professional detectors use state of the art circuitry to achieve ultra reliability in operation. They are currently specified by several "Name" commercial Security Companies.

## Precision Electronic Fet Multimeter For Laboratory Or Workshop

Going Up  
Next Shipment  
\$89.95 Be Quick

- 10 Meg Ohm input • 12 Amp DC and AC Current Ranges • Centre zero Pointer Adjust for + and - readings
- Single Range and Polarity Reversing switch • Power on LED indicator
- Transistor Tester inbuilt • P-P calibrated scale.

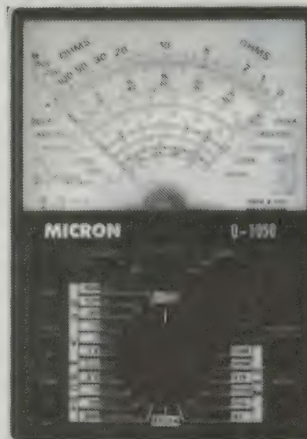

We're absolutely delighted with our laboratory FET VOM. The Q 1050 breaks new ground for an advanced, precision analogue meter of this quality below \$100. The Q 1050 has the advantage of digital multimeters i.e. insignificant circuit loading, high accuracy etc. without the misleading and erroneous readings that DVM's are famous for.

DC VOLTS  
Ranges—0-0.3, 1.2, 12, 30, 120, 300, 1200V—0-0.1, 0.5, 1, 5, 15, 60, 150, 600V at Centre 0  
Input Impedance—Approx 10M Ohm, 3M Ohm at 300mV range  
Rated Accuracy—2.5% DC and 3.5% AC full scale on all ranges

AC VOLTS  
Ranges—RMS 0-3, 12, 30, 120, 300, 1200V—Peak-peak 0-4, 33, 64, 330, 840, 3300  
Input Impedance—Approx. 1M Ohm 80PF 2.5M Ohm on 3V Range

Rated Accuracy—±0.5% —5MHz • 3%—dB— -10dB—+63dB at all AC ranges

DC CURRENT  
Ranges—0-0.1 uA, 0.3, 3, 30, 300mA, 12A

Potential Drop—300mV  
Rated Accuracy  
Within ± 2.5% full scale, all ranges

AC CURRENT  
Ranges—0-12A  
DC RESISTANCE  
Ranges—RX1 1K Ohm  
RX10 0-10K Ohm  
RX100 0-100K Ohm  
RX10K 0-10M Ohm  
RX1M 0-100M Ohm

Centre Zero Pointer Setting  
Allows + and - Readings

Q 1050 \$79.95

Going Up Next Shipment  
\$89.95 Be Quick

## High Definition Computer Monitor New 2 DIN Series 4

The New 2 DIN Computer Monitor has a high performance Non Glare CRT designed to reduce eye strain and improve concentration. Coupled with the non-glare screen is a rock solid Video display and high resolution characters.

### SPECIFICATIONS:

Screen Green Phosphor - Non glare 14  
Power On/Off, Contrast, Brightness  
Rear Controls Vertical size, vertical hold.  
Bottom Controls Horizontal hold, horizontal position.  
Input Impedance 75 Ohm/10K switch selectable  
Bandwidth 18MHz  
Resolution 900 lines at centre screen  
Input/Output Connector RCA  
Input Composite Video 1V P-P

D 1115 \$229 This Month \$199


Definitely Australia's Best Value In a  
High Resolution Monitor



BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007 FOR NEXT DAY JETSERVICE DELIVERY



Save Up To 50% On Top Quality  
D Series Connectors!  
**Fantastic Value**  
**D Series Computer  
Connectors, Gold Plated  
Professional Series**  
Items Marked \* are 1/2 Price or Less



**DB9**

WERE NOW

P 3000 Male 9 Pin	2.95	1.95
P 3010 Female 9 Pin	3.25	1.60*
P 3020 Male PCB Rt/L	3.75	3.60
P 3030 Female PCB Rt/L	4.50	3.25
P 3040 Male PCB mnt.	2.95	2.85
P 3050 Female PCB mnt.	3.95	3.25
P 3090 Backshell cover	1.95	1.29

**DB15**

P 3100 Male 15 Pin	3.25	2.50
P 3110 Female 15 Pin	3.85	1.90*
P 3120 Male PCB Rt/L	4.35	2.95
P 3130 Female PCB Rt/L	5.50	2.75*
P 3140 Male PCB mnt.	3.85	1.90*
P 3150 Female PCB	4.85	2.40*
P 3190 Backshell cover	2.20	1.10*

**DB25**

P 3200 Male 25 Pin	4.95	2.45*
P 3210 Female 25 Pin	5.50	2.75*
P 3220 Male PCB Rt/L	4.95	3.95
P 3230 Female PCB Rt/L	6.90	3.45*
P 3240 Male PCB mnt.	4.95	2.45*
P 3250 Female PCB mnt.	6.25	3.10*
P 3290 Backshell cover	2.20	1.10*

## PROFESSIONAL SERIES RACK CABINETS

Now your preamps, Amps, Control Modules Monitor  
Panels etc. can look every bit as good as Technics  
Nakamichi and other top manufacturers.



### ALL ALUMINIUM CONSTRUCTION

**FEATURES:** These beautifully crafted rack cabinet boxes will give your equipment a real 1st class appearance with removable top and bottom cover panels • All dimensioning conforms to the International Standard • Natural or Black finish • Ventilated lid • Deluxe finish front panel • Individually cartoned • Supplied in Flat Pack Form - Easily assembled in minutes - **Side Elevations:** D=254mm C (Internal Chassis Height) • B (mounting Bolt Centres).

**SIX NATURAL AND BLACK FINISH MODELS** — The Black or Natural finish cabinets are each available in 44mm, 88mm or 132mm high models. Mounting hole centres conform exactly to International Racking Specifications both vertically and horizontally.

Cat. No.	Finish	A	B	C	Were	Now
H 0401	Natural	44	34	38	\$59.95	\$50
H 0402	Natural	88	57	82	\$69.95	\$62
H 0403	Natural	132	89	126	\$85.00	\$79
H 0411	Black	44	34	38	\$59.95	\$52
H 0412	Black	88	57	82	\$79.95	\$70
H 0413	Black	132	89	126	\$89.95	\$80

## High Quality — High Power Ratings Polypropylene Loudspeakers

Virtually all the famous "Name" loudspeaker makers now use Bextrene or Polypropylene Cones with their drivers. The advantages are considerable - less cone flexing or "break up", improved bottom end response and reduced enclosure sizes.

One of the problems of course, has been the high cost of P-P drivers. Fortunately, with Altronics direct import prices, you can now be the owner of any of these fine speakers for a fraction of what you'd expect.

**Note:** the conservative power ratings, the massive magnets employed and high order sensitivity specifications with these fine Drivers.

**Brief Specifications** (All 8 ohm Voice Coil Impedance)

### 6 1/2" Woofer/Midrange 30 Watt RMS-50 Watts Max

C 3055 **\$24.50**

Frequency Response 10-3000Hz Resonant  
Frequency 36Hz Sensitivity (1M/1Watt) 87db (+  
or -2db) Voice Coil 25mm Nett Weight 900gm  
Electromagnetic Q .48 Magnet 280 gm.

### 10" Woofer 60 Watt RMS 100W Max.

C 3065 **\$65.00**

Frequency Response 10-3000Hz Resonant  
Frequency 30Hz Sensitivity (1M/1Watt) 92db (+  
or -2db) Voice Coil 38mm Nett Weight 2650 gm  
Electromagnetic Q .23 Magnet 836 gm.

### 8" Woofer 60 Watt RMS 100W Max

C 3060 **\$49.50**

Frequency Response 10-3000Hz Resonant  
Frequency 33Hz Sensitivity (1M/1Watt) 90db (+  
or -2db) Voice Coil 38mm Nett Weight 2200 gm.  
Electromagnetic Q .4 Magnet 836 gm.

### 12" Woofer 100 Watt RMS 150W Max

C 3070 **\$99.00**

Frequency Response 10-2000Hz Resonant  
Frequency 23Hz Sensitivity (1M/1Watt) 93db (+  
or -2db) Voice Coil 38mm Nett Weight 3620 gm  
Electromagnet Q .22 Magnet 1410 gm.

## High Energy Rack Case

The use of Super Heavy Duty Heatsinks as Rack Case sides now allows a myriad of Amplifiers, Power Supplies, Battery Chargers etc. to be built in an "Off the Shelf" rack case.

**Fantastic for Stereo Amplifiers**—Each Heatsink will accommodate an audio output stage of approximately 120W with normal efficiency and dissipation.

**A Great Chassis for Heavy Duty Power Supplies and Battery Chargers.** We suggest the mounting of Rectifier Bridge or diodes on one Heatsink and the Regulator devices on the other.

Order With Either Black Or Natural Anodised Front Panels

H 0417 Natural Anodised Front Panel **\$89.00** H 0418 Black Anodised Front Panel **\$89.00**

**Specifications:**  
Heatsinks Altronics H 0590 Front Panel 3 unit Rack size 480mm x 132mm x 3mm Base 1.0mm steel, ventilation slots provided Top Cover 1.0mm steel, ventilation slots provided **Internal Dimensions** 125 x 370 x 250mm **External Dimensions** 130 x 440 x 252mm plus standard front panel **Finish** Black anodised aluminium plus powder coat black top/base.

## Nifty Little Chassis Maker and Pan Brake Bender

Make Your own  
Chassis and Cases  
and Save a Fortune


**Please Note:** This product is a genuine Pan Brake Bender allowing you to make quite complex chassis boxes, lids, trays etc. - It is made from solid steel and is not to be confused with inferior Non Pan Brake simple benders currently sold by our competitors.

**Value Plus**

T 2400 ..... **\$99.95**

## Brilliant Solar Panel Array 18V @ 400mA

Fantastic for Trickle Charging 12V Battery Systems

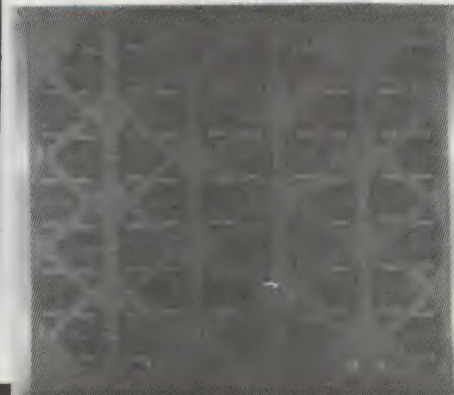

18V at up to 600mA under ideal sunlight conditions. Intended for charging 12 volt systems such as Car, Caravan and Boat batteries etc.  
Cat. A 0220

**Was \$119  
Now \$99**




BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007 FOR NEXT DAY JETSERVICE DELIVERY

## Superb Eleco Wireless Microphone System uses Dual Diversity Receivers for Long Range, Noise Free Pure Fidelity Reproduction.

Now Available  
In Australia For  
Less Than  
\$1,000

Altronics proudly release the Eleco  
System - Used Worldwide by Entertainers  
i.e. Rolling Stones, Dire Straites,  
Tina Turner and 1000's more!

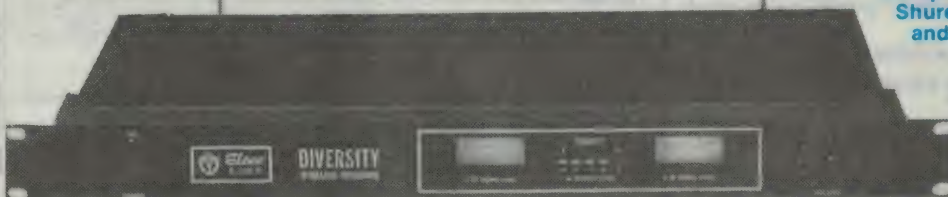

Unique  
Microphone  
design completely  
Eliminates  
"Dangling"  
Antenna



Breathtaking performance without signal drop-out or noise interference. The Eleco Wireless Microphone System is virtually the ultimate in an Entertainers Microphone system (or for any roving microphone application for that matter).

All the annoying wireless microphone characteristics such as "drop out", static and noise are completely eliminated by use of **auto switching dual diversity receivers**. The output of each receiver is continually monitored, with the strongest and clearest signal always selected. **Dynamic Range exceeding 100 db** is obtained by employment of a Patented special Parabola level compressor and Dynamic expander.

The operating range is a minimum of 50 metres (often this can be extended to 200 metres and more in normal circumstances).

Several Frequencies are available to alleviate cross interference when two or more systems are used in proximity.

**Brief Specifications** Frequency 202.1, 202.9, 203.7 MHz (Please specify if you have a preference)

**Mic Carrier Power** 50mW (Max) **Mic Antenna** built-in **Dynamic Range** over 100db **S/N Ratio** better than 90db **Frequency Response** 20Hz to 16KHz + or - 3db **Mic Battery** 4 x AA cells **Battery Life** over 24 hours continuous operation. **Receiver Sensitivity** 12db/micro volt for 60db S/N ratio **Pre emphasis/De emphasis** 50us. **Receiver output** unbalanced 6.3mm phone jack and balanced 3 pin cannon type. **Output Level** (adjustable) Unbalanced 0-2.5V Balanced 0 to + or - .3V into 600 ohms. **Receiver Power Supply** 200 - 260VAC.

### Prices

- (A) Dual Diversity Receiver \$729.00
- (B) Entertainment Microphone (hand held type) \$349.00
- (C) Lavalier Type Microphone \$349.00

**Bonus Offer SAVE \$78 Choose Receiver and Either Microphone For Just \$999**

Please Note 3 different operating frequencies are available (you will need to specifically nominate desired frequency only if the equipment is being used in proximity with other Eleco Systems on the 200MHz band).

### Frequencies

C 0111	Dual Diversity Receiver	202.1MHz	\$729
C 0113	Dual Diversity Receiver	202.9MHz	\$729
C 0115	Dual Diversity Receiver	203.7MHz	\$729
C 0121	Entertainment Microphone	202.1MHz	\$349
C 0123	Entertainment Microphone	202.9MHz	\$349
C 0125	Entertainment Microphone	203.7MHz	\$349
C 0131	Lavalier Microphone	202.1MHz	\$349
C 0133	Lavalier Microphone	202.9MHz	\$349
C 0135	Lavalier Microphone	203.7MHz	\$349

## AT LAST Design Quality Weather Proof Speakers And Sound Columns By Redford

- Rugged extruded aluminium construction • Superb powdercoat industrial paint finish • Engineered in Australia • Excellent reproduction • Superior to imports — Yet just a fraction of the price!

Altronics proudly announce the release of the superb **Redford Weatherproof Speaker and Sound Column Range**. Imagine a wide range speaker system which is highly directional and with efficiency approaching that of reflex horns!

**Redford** is the solution for high quality sound reproduction outdoors. The Five Models to choose from "Fill the Bill" from applications on boats to high grade paging and music entertainment installations.

### RUGGED EXTRUDED CONSTRUCTION

These vibration free enclosures are constructed from die extruded heavy gauge aluminium and finished with incredibly durable industrial powdercoat enamel. The speaker ends are sealed via gaskets and tough moulded "LURAN S" UV resistant end caps. The end result is "Good Looks" together with assured rugged durability for the Australian environment.

### EXCELLENT REPRODUCTION

The drivers have been chosen for wide range, low distortion, mid range "presence" (essential for high grade vocal work) and high efficiency in general. **Power Capacity** for short term use, the drivers will safely handle 150% of rated power. Acoustic wadding is used to dampen Bass resonance. **Weather Proof Construction and use of "Doped Cones"** Foam plastic and cloth is sandwiched between Baffle and Front Grill to prevent water ingress. A first for **Redford** is the use of a patented cone moisture repellant process for all models.



Wide Range  
Weatherproof Extension  
Speakers For Your Stereo  
System

Great For The Back  
Patio, Swimming  
Pool, Games Room,  
Den, Pool Room Etc.

Dimensions 260mm wide  
x 170mm high x 150mm D.  
(Mounting brackets are  
included)

### 10 Watt 16 Ohm (Max 15 Watt)

Single dual doped cone driver 16 ohm impedance is employed to give a generally correct volume balance with main speakers - an added bonus is your amplifier load is kept to respectable limits!! Great for back patio, Den, Boat Deck etc.

C 0938	White	\$99ea	\$190 per Pair
C 0940	Black	\$99ea	\$190 per Pair

### 20 Watt 8 Ohm (Max 30 Watt)

Use 2 special dual doped cone drivers for those wanting a bit more umph!

C 0943	Black	\$139ea	\$260 per pair
C 0944	White	\$139ea	\$260 per pair

### 100 Volt Line Models For Use With Professional PA And Music Systems

Using a "Doped" wide range drivers and fitted with grain oriented steel line transformer Output cable allows connection to 10W/5W/2.5W with 10 watt models, 20W/10W/5W with 20 watt models and 40W/20W/10W with the 40 watt versions.

C 0941	10W/100V line Black	\$119ea	\$220 per pair
C 0942	10W/100V line White	\$119ea	\$220 per pair
C 0945	20W/100V line Black	\$169ea	\$299 per pair
C 0946	20W/100V line White	\$169ea	\$299 per pair
C 0950	40W/100V line Black	\$225ea	\$399 per pair
C 0955	40W/100V line White	\$225ea	\$399 per pair


BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007 FOR NEXT DAY JETSERVICE DELIVERY



## Great Test Gear At Bargain Prices

### 150MHz Frequency Counter

A frequency counter is invaluable for the accurate alignment and testing of many modern electronic circuits.



#### SPECIFICATIONS:-

**Frequency Range** 10Hz - 150MHz  
**Gate Time** 1 sec, 6 sec.  
**Accuracy** +/- 1 count  
**Max. Input** 20V P-P  
**Sensitivity:-**  
 • 10Hz - 30 MHz 25mV - 100mV  
 • 10MHz - 150MHz 100mV - 300mV  
**Power requirement** 9V DC at 100mA

Use Our 9V Plug Pack M 9004

Q 1520 ..... \$199.00

### Audio Frequency Generator

Often in testing audio circuitry it is necessary to have an accurate and adjustable audio signal source available. This little generator even allows you to test 455KHz IF stages!




#### SPECIFICATIONS:-

**Frequency Range** 10Hz - 1MHz  
**Accuracy** +/- 3% + 2Hz  
**Output Waveforms** Sine/Square  
**Output Level** Sine: 8V RMS  
 Square: 10V P-P  
**Output Attenuator** 0-20 db, -40 db and fine adjust.

Q 1540 ..... \$249.00

### RF Signal Generator

An RF signal generator is an absolute must when it comes to radio servicing. With provision for both internal and external modulation this generator is a winner.

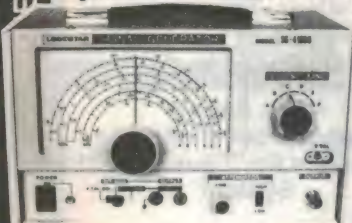

#### SPECIFICATIONS:-

**Frequency Range** 100KHz - 150MHz  
 In 6 Ranges  
**RF Output Level** 100mV RMS  
**Accuracy** +/- 3%  
**Modulation:-**  
 • Internal (30% Depth) 1KHz  
 • External 50Hz - 20KHz  
 • Crystal Locked Oscillator

Q 1550 ..... \$199.00

### Brilliant Auto Ranging Digital Multimeter

Autorangeing with Memory Function for Relative Measurements

Q 1075 Only \$99.95

**Free** Select either a carry Case or Holster this Month with your Q 1075 at no charge

#### Specifications

**DC Voltage: Ranges** 5(200mV, 2V, 20V, 200V, 1000V) **DCV Accuracy** 0.5% + 1 DGT  
**AC Voltage: Ranges** 4 (2V, 20V, 200V, 750V) **ACV Accuracy** 0.75% + 5 DGTs  
**Input Impedance** 10M Ohm Min.  
**DC Current: Accuracy** 20mA—0.75% + 1 DGT  
 10A-1.50% + 5DGTs



#### Holster

What's this? For want of a better name we've named this thick rubber "cliparound" protector a "Holster". Great protector for field use, dropping on concrete floors etc.

Q 1077 \$9.50

#### Carry Case

Keep your Labtech DMM looking like new for years!

Q 1076 \$9.50



## EA's Greatest Amp Project In 10 Years

### 'Sixty-Sixty' Integrated Amplifier Kit

(EA May, June, July '86)

#### Features:

• 60 watts per channel into 8 ohm loads • Very low noise on all inputs - better than CD performance • Very low distortion • Excellent headroom • Tape monitor loop • Tone controls with centre detent and defeat switch • Mono/stereo switch • Toroidal power transformer • Easy-to-build construction • Very little wiring.

#### Performance Specification

**Power Output** — 8 ohms 62W Distortion - Less than .0% at 1kHz. **Frequency Response** - Phono Inputs - RIAA/IEC equalisation within + - 0.5db from 40Hz to 20kHz  
**Line Level Inputs** — -0.5db at 20Hz and -1db at 20kHz **Input Sensitivity** - Phono 1kHz -4.3mV • Line Level - 270mV. **Hum & Noise** - Phono - 89db • High Level Inputs - 103db. **Tone Control** - Bass - + -12db at 50Hz Treble - + -12db at 10kHz. **Damping factor** - At 1kHz and 30Hz - greater than 80 **Stability** — Unconditional.



K 5060 \$299

Beginner Constructors Can Build this Amplifier Kit — It looks terrific and will last you a lifetime. **Save \$200 or More** on comparable performance commercial units.

"This New Amplifier offers a standard of performance far ahead of anything we have previously published and ahead of most commercial Integrated Stereo Amplifiers".

"It is half to one third of the cost of an imported Amplifier with equivalent power output and performance". Says Leo Simpson Managing Editor Electronics Australia Magazine.

The reproductive purity of these speakers simply amazed us. The secret, of course is the DANISH VIFA Drivers. VIFA drivers are used in many top selling imported systems such as Bang & Olufsen, Rogers, Mission, Jamo, DCM Timewindow etc.

### Build These Fantastic New Playmaster HiFi Loudspeakers

See Electronics Australia Sept '86

\$449

full kit K 5090

If your budget won't run to the \$600 to \$800 needed for a fully imported pair of equivalent speakers, these are the ones to go for.




Exhilarating Sound Performance

### Brilliant Digital Headphones

#### Incredibly Comfortable

• Utilizes newly developed flat disk vibrator copper clad aluminium wire voice coil and Samarium cobalt Magnet. The resultant reproduction is outstanding. • Impedance 45 Ohms. • Maximum input 400 mW  
 • Frequency Response 20Hz to 20KHz.

C 9010 ... \$39.50





FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007

## LOOK Great Projects To Build



### Fantastic New Kit From EA Super Large LED Display Module (Display 150 x 60)

Need to produce an LED display that can be seen from a long way off? This single digit 153mm high seven segment LED display module is just what you need. It can be used as a replacement for both common anode and common cathode LED displays, can be either multiplexed or DC driven, and can be provided with a decimal point on either the right or left.

External DC Supply Required 20 - 24V at 150mA

K 1225 \$49.95

### This Natty Single Button Security Lock Is Just The Shot For Your Garage, Workshop, Wine Cellar Or Front Door

#### 4-Digit Combination Lock

This electronic combination lock has a four digit security code which is entered using a single pushbutton switch. For added security, each number of the code must be entered within certain time restraints. Once the correct code has been entered, the circuit triggers a solenoid operated door catch to unlock the door.

Altronic Kit Housed in sturdy Jiffy Box.

K 1925 ..... \$35.00




Excludes Solenoid Door Catch  
(Available from your local Security Store)

#### TRANSISTOR ASSISTED IGNITION WITH DWELL EXTENSION

Dead easy to build and (even better) there are only 3 electrical connections required to the car wiring system.

K 4010 ..... \$39.50




## The Power House Arrives Massive 600 Watt Inverter

Operates from 12 or 24 Volt systems via internal wiring connections

Big brother to our 300W Model this brilliant design can be internally connected for either 12 or 24V operation. Full 600 watt output — and that will power a fantastic array of appliances e.g. Lighting, Electric Motors, Electric drills, Hi Fi, TV Sets, Computer. An absolute must for House Power or for the Truck, Tractor etc.

K 6770 Complete Kit \$399.00  
K 6775 Fully Built & Tested \$499.00

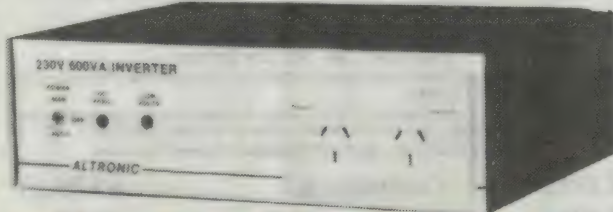

With Soldering Stations Costing \$150 and More, This Represents Excellent Value


### Temperature Controlled Soldering Station

(EA Sept. '86)

Controls the temperature of your standard soldering iron. Suitable for irons rated from 20W—75W - Standard soldering iron plugs straight in, no need for modification.

The Altronics Kit comes complete — Pre-punched and silk screened. K 6400

\$35.00



#### Zener Tester

Used with your multi-meter - Reads exact zener voltage up to 60V. K 2620

\$12.50

### Save A Bundle On Those Dangerous Pesticides

#### Build EA's Great Ultrasonic Pest Repeller


EA's "Pest Off" generates frequencies between 23KHz and 64KHz claimed to be the best for driving off most vermin and beasts. K 1600



\$39.95

### Blowing Fuses Blowing Your Cool? You Need The Electronic Fuse

K 2535 \$32.50




All you do is clip the unit across the DC fuse holder (fuse removed), dial up the required current (max. 10A) and if the circuit draws more than this then the circuit "trips" or opens. Thus power is removed from the device.

Features: Fast blow - slow blow setting • Manual reset button • LED fuse tripped indicator • Operates off 1 single 9V battery (not supplied) • Two current ranges 0-1A & 0-10A • Any current setting available up to 10A • Current Settings easily adjustable via a pot and calibrated scale. • Housed in a rugged Jiffy Box.

A Must for prototyping and service work. No Electronic workshop should be without one.

#### Video Enhancer

Sharpens up your picture when Copying Video to Video



Here's a simple but effective video enhancer that is super easy to build at a fraction of the cost of commercial models. Unit sharpens picture detail, and can actually improve the quality of a copy by amplifying the top end of the video signal. K 5825

\$42.50

#### Screecher Car Burglar Alarm

This alarm drives off wouldbe thieves with an ear splitting modulated tone. Once activated it is near impossible to stay within the confines of the car.

Features: Entry Delay • Exit Delay • Alarm Timer • Lamp Flasher • Three second soft alarm reminder. Piezo siren produces modulated tone of 110db at 1 metre. Simple to build and install. Two Sensor Inputs

#### Ultrasonic Movement Detector


This Ultrasonic Movement Detector provides added protection against illegal entry via an open window etc. Connects directly to an alarm with a normally open input. Detects any movement up to 3 metres within an angle of 30 degrees. Will operate directly off 12V i.e. Car Battery etc.



K 4400  
\$29.50

#### Mosfet Power Amp Module 150 Watt

Here is a high power, general purpose power Amplifier module suitable for HiFi, guitar and PA applications employing sturdy, reliable MOSFET's in the output stage.

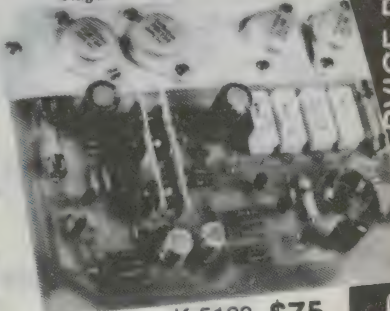

K 5120 \$75

#### SPECIFICATIONS:

##### Power Output

150W RMS into 4 Ohms

100W RMS into 8 Ohms

(At onset of clipping)

##### Frequency Response

20Hz to 20KHz +0 -0.5db

10Hz to 60KHz +0 -3db

(Measured at 1 W and 100W Levels)

##### Input Sensitivity

1 Volt RMS for full output

##### Hum

98db below full output

##### Noise

114db below full output


##### Total Harmonic Distortion

0.006% @ 1KHz 12W

0.03% @ 10KHz 12W

##### Stability

Exceptional (tested to full output driving 3.3uF into short circuit at 10KHz).



#### DIGITAL PHOTO TIMER \$79.50

This classy digital timer allows precision timing for photographic processing from 1 second up to 9 minutes 59 seconds in 1 second increments.

Features: Large easy to read LED displays Hold switch which interrupts timing and focus switch which bypasses the timer settings. K 1850



K 4360  
\$39.95

FOR NEXT DAY JETSERVICE DELIVERY

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007



# Excellent Kit Projects to Build



K 3300

**\$165.00**

## Laboratory Power Supply

3-5 Volts at up to 5 Amps

Designed by Electronics Australia, this supply has been one of our most popular kits. Our version incorporates refinements and is now housed in an attractive, tough "ABS" instrument case. This all new compact version has been made possible by the use of a high efficiency Toroid Power Transformer. So you win four ways - less heat, less weight - Greatly enhanced appearance and easier to build - Remember the Altronics Kit is fully drilled and punched.

## Beat Triggered Strobe

Add Some Life To Your Next Party

Designed by Australian Electronics Monthly. Flashes in time to your music. Will also work as normal strobe. Exclusively customised by Altronics into our H 0480 Instrument Case, making construction a breeze and improving stability and overall appearance. Includes silk screened panel.



K 5790 ..... **\$59.95**

Two Tube Option For Increased Power

K 5795 ..... **\$9.95**


## FANTASTIC HI TECH - HI SPEC Audio Oscillator and Function Generator

This Ultra low distortion oscillator is comparable with the very best laboratory standard sine wave oscillators. As well as having very low distortion it has excellent envelope stability, square wave output and output metering

### 2 Models to choose from (metered and unmetred)

- Frequency range 10Hz - 100KHz in 4 ranges • Output level 3V RMS max adjustable
- Attenuator 0db, -10db, -20db, -30db, -40db, -50db plus fine adjustment • Output impedance - 600 ohms unbalanced • Output waveforms - sine and square.

All components mount on one single PCB making it a breeze to Construct  
**Save \$200 and More by Building this Fine Kit Project**

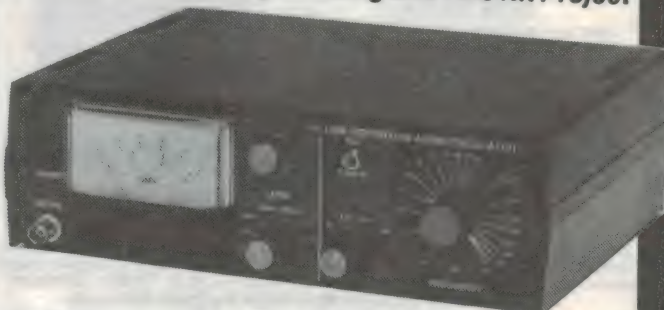

K 2540 Complete Kit with Front Panel Metering **\$155**

K 2545 Complete Kit Without Metering **\$139**

## 300 Watt Inverter With Auto Start

Operates From 12V Car Battery



Just think how handy it would be to have 240 Volt AC Mains Power when camping or for your boat or Caravan.

**Auto Start** draws power from your battery only when appliance is plugged in and "turned on". i.e. battery can be left permanently connected if desired.

Thermal Over Load. Current Regulated. Current Overload

K 6752 Complete Kit **\$229.00**

K 6754 Fully Built & Tested **\$329.00**

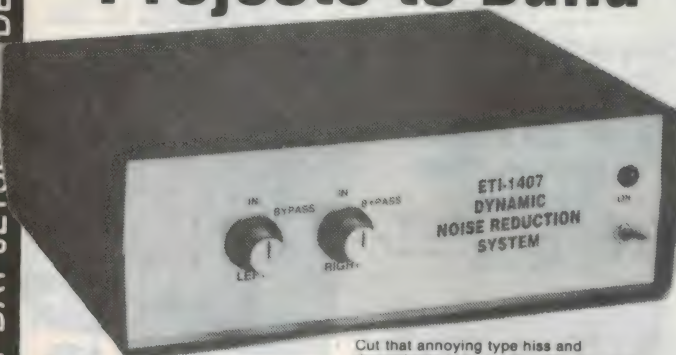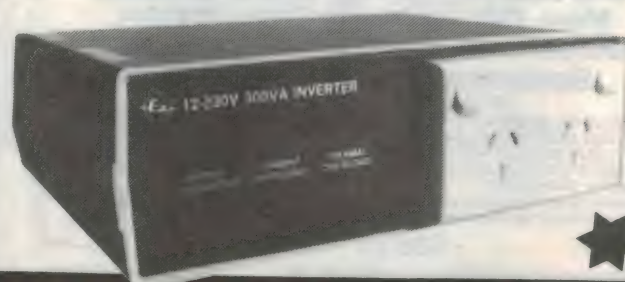

**Stunning Design Makes Your Tape Machine Sound Like A CD Player**

## Dynamic Noise Reduction System

(See ETI Dec. 88)


Cut that annoying type hiss and dramatically increase dynamic range of your cassette recordings with this Dynamic Noise Reduction System. It. This fantastic system improves signal to noise of your tape deck by up to an incredible 18dB without treble attenuation. It also expands dynamic range, allowing greatly improved recordings from compact disc players.

K 5575 ..... **\$99.00**

## EA Dual Tracking Power Supply

The Ideal Power Supply For The Audiophile Experimenting with Linear Op Amp Designs

- Floating Ground • Meter Switchable V to A • Voltage adjustable to within 10mV • Output + or - 1.3V to + or -22V at 2 Amps +5V @ 1.0 Amps

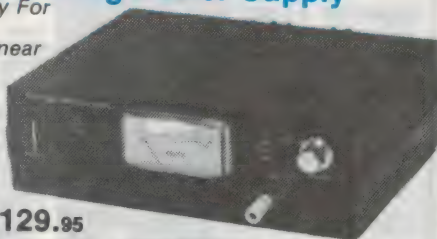

**\$129.95**

**Check Appliances And Electrical Wiring**



## Build This 1000V Megohm Meter

(1985 Successor to the "Megger")

It uses a transistor inverter to produce a regulated 1000V DC supply which is applied to the insulation under test. Insulation resistances between 2M Ohm and more than 2000 Ohm can be measured.

K 2550 (See EA July/85)

**Just \$55**

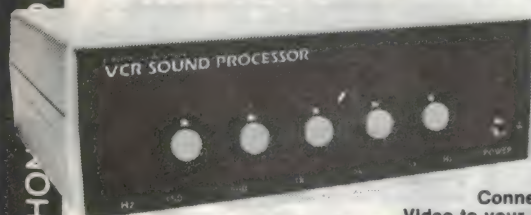

## VCR Sound Processor

Connect your VHS or Beta Video to your home Stereo System via this superb Stereo Simulator

Now a quite phenomenal enhancement to your VCR audio quality and impact realism can be achieved by feeding the Video sound O/P through your home HiFi system via. EA's simply brilliant VCR Sound Processor. Not only does it give simulated stereo but the inbuilt 5 stage graphic equaliser provides tonal depth for added realism and listening enjoyment.

K 5820 ..... **\$59.95**

**12/240V Inverter for Small Appliances**  
Low Power Design also Works as a Battery Charger

**\$79.50**



The inverter is ideally suited to powering low wattage mains appliances from the car battery while camping. This considerably improves the comfort level of the civilised camper. Similarly, it has uses in boating. Typically, it can be used to power an electric shaver, electric blanket, electric can opener or a 40W light bulb. Alternatively, back in the home (or still on the camp site). Frequency sensitive items such as belt or idler driven turntables can be powered at a very precise crystal controlled frequency for accurate sound reproduction. If speed variation over a small range is required, then a switch is provided to change from the crystal base 50Hz signal to a variable oscillator. K 6705

FOR NEXT DAY JETSERVICE DELIVERY

ALTRONICS TOLL FREE 008 999 007

BANKCARD HOLDERS — PHONE

FOR NEXT DAY JETSERVICE DELIVERY

ALTRONICS TOLL FREE 008 999 007

BANKCARD HOLDERS — PHONE




BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007 FOR NEXT DAY JETSERVICE

BANKCARD HOLDERS — PHONE ALTRONICS TOLL FREE 008 999 007 FOR NEXT DAY JETSERVICE

## Bench Top Power Supply

3-30V to 1 amp Max. with variable current limit

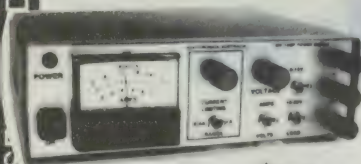

**\$79.00**

### FEATURES:

• Output 3 to 30V at 1A • Short circuit protected • Load switching • Current limiting. Dual scale meter • Housed in our Deluxe "ABS" instrument case

### SPECIFICATIONS:

• Output Voltage - 3 to 30V • Output Current - 0 to 1 amp (fully variable) • Load Regulation - Better than 0.2% from 0 to full load • Output Ripple - Less than 2mV RMS Cat. K 3210

## Transistor Tester

For In Circuit Testing

**\$17.50**



"NO NEED TO UNSOLDER SUSPECT TRANSISTORS"

### FEATURES:

• Tests both NPN and PNP transistors in circuit at the touch of a switch • Tests Diodes and SCRS as well • No need to switch between NPN and PNP—its automatic. Two LED indicators are used to show condition of device being tested.

**Altronics Kit Feature** - "ABS" jiffy box and test leads supplied. Cat. K 2530



### Low-Cost Unit

Checks Values from 1pF - 100uF

## Upgraded Digital Capacitance Meter

The readout consists of a bright 4-digit LED display and the full scale readings for each range are 9999.9nF and 99.99uF. No adjustments are necessary when taking a reading. You simply connect the capacitor to the test terminals and select the appropriate range. The circuit can accurately measure capacitance down to one picofarad (1pF). This is made possible by the internal nulling circuit which cancels any stray capacitance between the test terminals or test leads. So when you measure a 5pF capacitor, the unit will display 5pF.

K 2522 ..... **\$79.00**



174 ROE STREET, PERTH  
FOR INSTANT SERVICE

PHONE ORDER  
TOLL FREE  
008 999 007

PERTH METRO  
AND A/HRS  
(09) 328 1599

### ALL MAIL ORDERS

P.O. Box 8350, Perth Mail Exchange  
Western Australia 6000

### PACKING & DELIVERY CHARGE

**\$3.00 DELIVERY AUSTRALIA WIDE**  
- We process your order the day received and despatch via. Australia Post. Allow approx. 7 days from day you post order to when you receive goods. Weight limited 1Kgs.

**\$6.00 OVERNIGHT JETSERVICE** - We process your order the day received and despatch via. **Overnight JetService Courier** for delivery next day. Country areas please allow additional 24-48 hours. Weight limit 3Kgs.

**\$8.00 HEAVY SERVICE** - For deliveries exceeding 3kgs and less than 10kgs—allow 7 days for delivery

**\$10.00 HEAVY HEAVY SERVICE** - All orders of 10Kgs. or more must travel Express Road - Please allow 7 days for delivery.

**INSURANCE** - As with virtually every other Australian supplier, we send goods at consignee's risk. Should you require comprehensive insurance cover against loss or damage please add 1% to order value (minimum charge \$1). When phone ordering please request "Insurance".

**TOLL FREE PHONE ORDER** - Bankcard Holders can phone order toll free up to 6pm Eastern Standard Time. Remember with our **Overnight JetService** we deliver next day.

## Altronics Resellers

Chances are there is an Altronics Reseller right near you - check this list or phone us for details of the nearest dealer.

**Blue Ribbon Dealers** are highlighted with a ■. These Dealers, generally carry a comprehensive range of Altronics products and kits or will order any required item for you.

**Don't forget our Express Mail and Phone Order Service** - for the cost of a local call, Bankcard, Visa or Mastercard holders can phone order for same day despatch.

**Please Note:** Resellers have to pay the cost of freight and insurance and therefore the prices charged by individual Dealers may vary slightly from this Catalogue - in many cases, however, Dealer prices will still represent a significant cost saving from prices charged by Altronics Competitors.

## MORE ALTRONICS DEALERS WANTED

If you have a Retail Shop, you could increase your income significantly by becoming an Altronics Dealer. Phone Colin Fobister (09) 328 2199 for Details.

### WA

#### COUNTRY

##### ALBANY

BP

Electronics ■ ..... 412681

##### ESPERANCE

Esperance

Communications 713344

##### GERALDTON

K.B. Electronics

& Marine ..... 212176

##### KALGOORLIE

Todays

Electronics ■ ..... 212777

##### KARRATHA

Daves

Oscitronics ..... 854836

##### MANDURAH

Lance Rock

Retravision ..... 351246

##### NEWMAN

Watronics ..... 751734

##### WYALKATCHEM

D & J Pease ..... 811132

### NT

#### ALICE SPRINGS

Ascom

Electronics ..... 521713

Farmer

Electronics ..... 522967

### ACT

#### CITY

Bennett Commercial

Electronics ..... 805359

Scientronics ..... 548334

### SA

#### CITY

Electronic

Comp & Equip. 2125999

Force

Electronic ■ ..... 2122672

#### SUBURBAN

##### BRIGHTON

Brighton

Electronics ■ ..... 2963531

##### CHRISTIES BEACH

Force

Electronics ■ ..... 3823366

##### ENFIELD

Force

Electronics ■ ..... 3496340

##### PROSPECT

Jensen

Electronics ■ ..... 2694744

#### COUNTRY

##### MT. GAMBIER

South East

Electronics ..... 250034

##### WHYALLA

Eyre

Electronics ■ ..... 454764

### TASMANIA

#### HOBART

George Harvey ■ ..... 342233

#### LAUNCESTON

Advanced

Electronics ..... 315688

George Harvey ■ ..... 316533

Nichols

Radio TV ..... 316171

### VICTORIA

#### CITY

Active

Wholesale ■ ..... 6023499

All Electronic

Components ..... 6623506

#### SUBURBAN

##### ASPENDALE

Giltronics ..... 5809839

##### CHELTENHAM

Talking

Electronics ..... 5502386

##### CROYDEN

Truscott

Electronics ■ ..... 7233860

##### PRESTON

Preston

Electronics ..... 4840191

#### COUNTRY

##### BENDIGO

KCJohnson ■ ..... 411411

##### MORWELL

Morwell

Electronics ..... 346133

##### SWAN HILL

Cornish Radio

Services ..... 321427

### NSW

#### CITY

David Reid

Electronics ■ ..... 2671385

#### SUBURBAN

##### BLACKTOWN

Wavefront

Electronics ..... 8311908

##### CARINGHAH

Hicom

Unitronics ..... 5247878

##### LEWISHAM

PrePak

Electronics ..... 5699770

#### COUNTRY

##### ALBURY

Webb's

Electronics ■ ..... 254066

##### COFFS HARBOUR

Coffs Harbour

Electronics ..... 525684

##### GOSFORD

Tomorrows

Electronics ■ ..... 247246

##### NEWCASTLE

Novacastrian

Elect. Supplies ■ ..... 621358

##### NOWRA

Ewing

Electronics ■ ..... 218412

##### ORANGE

Fyfe

Electronics ..... 626491

##### RAYMOND TERRACE

Alback

Electronics ..... 873419

##### TENTERFIELD

Nathan Ross

Electronics ..... 362204

### WINDSOR

M & E Electronics ■

Communications ..... 775935

### WOLLONGONG

Newtek

Electronics ■ ..... 271620

Vincom

Electronics ..... 284400

### QUEENSLAND

#### CITY

Delsoud P/L ..... 8396155

#### SUBURBAN

##### FORTITUDE VALLEY

Fred Hoe & Sons

Electronics ..... 2774311

Economic

Electronics ..... 523762

##### PADDINGTON

Jacques

Electronics ..... 3698594

##### SLACKS CREEK

David Hall

Electronics ..... 2088808

##### TOOWONG

Techniparts ..... 3710879

#### COUNTRY

##### CAIRNS

Electronic

World ..... 518555

##### BUNDABERG

Bob Elkins

Electronics ..... 721785

##### GLADSTONE

Supertronics ..... 724321

### MACKAY

Philtronics ■ ..... 578855

### NAMBOUR

Nambour

Electronics ..... 411604

### PALM BEACH

The Electronic

Centre ..... 341248

### ROCKHAMPTON

Electron

World ..... 278988

Access Electronics

(East St.) ..... 21058

Purely Electronics

(Shopping Fair) ..... 280100

Xanthos

Electronics ..... 278952

### TOOWOOMBA

Hunts

Electronics ■ ..... 329677

### TOWNSVILLE

Solex ■ ..... 722015



**Better and Faster Service Than Any Other Australian Supplier or Your Money Back**

Jack O'Donnell  
M/Director



# Voltage & continuity checker

*This handy voltage and continuity checker probably belongs in every toolbox. It tests AC and DC voltages and also continuity in wires and cables.*

by HENK MULDER

Those amongst us who have ever tried to find their way into the electrical system of their car, motorbike or boat know the problem: is this point or wire at 12V or at earth? The better equipped technician gets his voltmeter out, and crawls under the dashboard with the test leads. But while you're concentrating on keeping the test probes at the right spot, you'll find it very difficult to read the voltmeter at your side.

This is just one of the problems you can encounter when working on electrical installations. Often the only important thing when working in cars or boats etc. is to know whether a certain point

is "active" or not. Also the polarity can be of importance. When doing measurements in such environments, precision is generally not required.

When working on 3-phase AC power systems, one would like to make the distinction between inter-phase (415V), line (240V) and neutral or earth, but measuring actual changes in the mains voltage is generally not relevant, and often in fact can only be distracting.

Another important thing in electrical installations is the measurement of continuity of wires. After a modification or installation of wiring has been completed, it is vital to test the new installation

in order to find out whether there is an inversion of wires, or perhaps wires missing.

If you have ever worked in an installation environment, then you will know that this environment does not exactly resemble an electronic test laboratory where you can take off your jacket before you put the probes of a four-digit voltmeter on a car battery to test the polarity.

In real-life installation work one could be on top of some wobbly worn-out steps, or within a few centimetres of a growling engine. Often there is not much time for reading scales, if at all.

So it is that today's electricians are often equipped with commercial voltage checkers which only read out the general voltages like 12V, 240V, 415V etc. The great advantage of these checkers is that they only take a glance at the display to read the voltage. Some of the better testers are also equipped for continuity testing.

The major problem with these commercial voltage & continuity checkers is the price, around \$75. For lot of people this is just a bit too much.

As these voltage & continuity testers really are very handy, we decided to cut down the price by designing our own.

The voltage & continuity checker described here measures AC & DC voltages in the ranges: 6V, 12V, 24V, 48V, 110V, 240V and 415V. There is also a polarity indication, and in case of AC, both polarity LEDs will light up.


Whenever a voltage is measured, there is also a "beep" tone.

The continuity tester is selected by a switch. The continuity of a wire is indicated by an audiovisual signal: both a beep and a glowing LED.

As said before, we have tried to cut the commercial price of these voltage & continuity checkers. We succeeded in doing so, for you'll be able to build our checker for less than thirty bucks. That even includes the battery for a change!

## **Danger: HIGH VOLTAGE!**


Similar warnings should be stuck on any project involving mains, of course. In

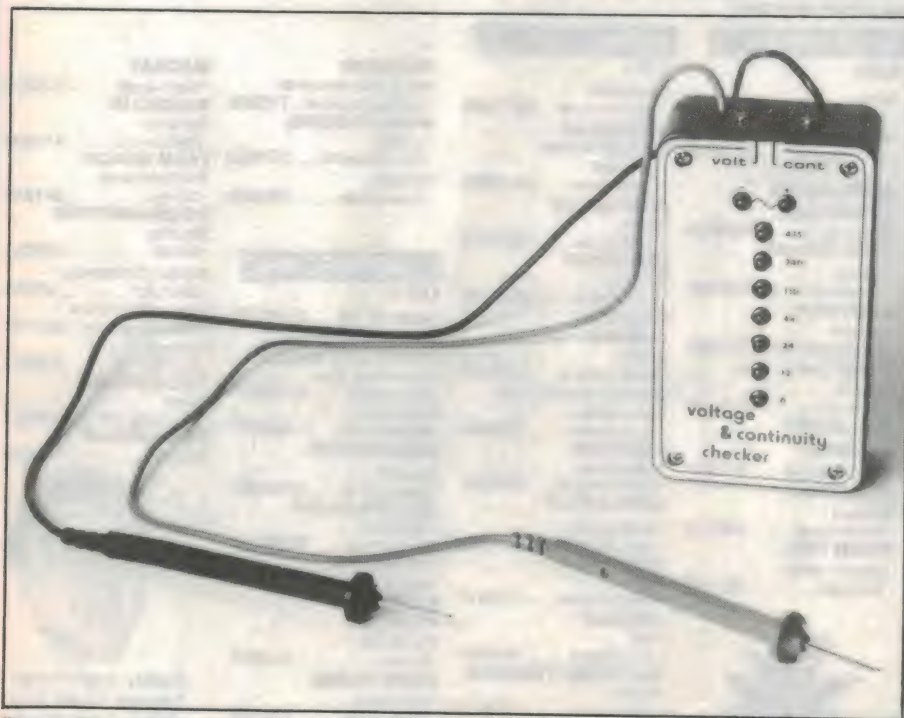

**The voltage & continuity checker: a useful tool for installation and servicing work.**



$\text{E}_A$

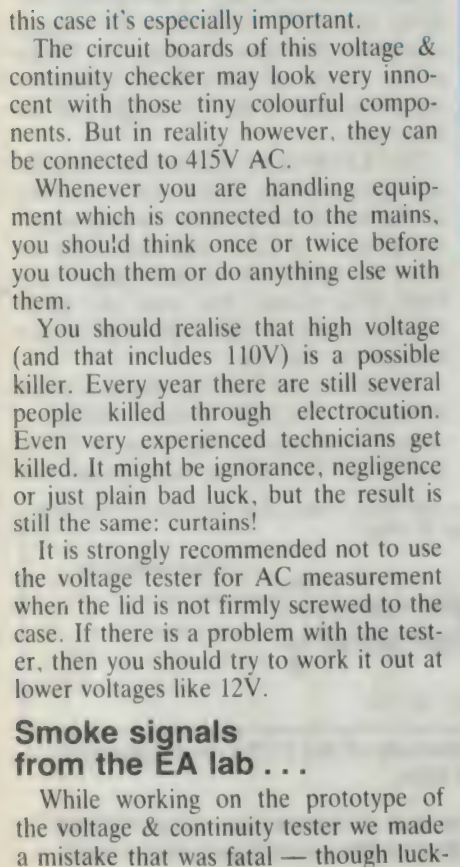

ily only for the prototype itself. As the mistake was not too obvious, we would like to explain what happened. It might save you, your tester and other expensive equipment from the consequences of making a similar mistake.

The prototype was built on a breadboard and was ready to be tested. As a supply we used a benchtop power supply rather than a 9V battery. Everything worked fine for the lower voltages. When we got to the stage of testing AC 240V we heard an explosion and saw smoke escaping from a carbonised breadboard . . .

After the crowds had disappeared, we had a closer look at the prototype and the test set-up and tried to figure out what had happened.

The source of the problem was the power supply we had used, our own

ELECTRONICS Australia, November 1987 89



when connecting oscilloscopes to mains carrying circuits. Most CRO's have the ground of the probe inputs directly connected to the chassis and thus to the earth.

If you connect the ground of the probe to a mains carrying part in a circuit, then you will create a short circuit with the accompanying spectacular but dangerous effects. Your probe may not be the first to partly evaporate!

## The circuit

The circuit of the voltage & continuity tester can be split up in five parts: an input rectifier, a voltage divider circuit, a display unit, a power supply and an oscillator.


Most of the circuitry belongs to the voltage tester so we'll start explaining the circuit for the voltage tester. S1 is therefore in position 1.

When the test probes are put on a voltage source, the measured voltage is rectified by the full-wave rectifier (D1, D2, D3 and D4). The resulting voltage can contain a large ripple, as the original voltage could be AC, and is therefore filtered by C1.

The rectified voltage is eventually compared to a reference by the op amps which drive the display LEDs. These op amps could not of course handle the high voltage of the mains, so to suit the op amps, the rectified voltage is divided down to lower voltages by a set of dividers (one for each range).

The reference to which this rectified voltage is compared is 2.2V and this means that the output of each branch of the divider network must be arranged to produce 2.2V for the voltage this branch is supposed to measure. This voltage should be a bit higher actually, to prevent the voltage tester being too critical. The actual output voltage of each branch is about 2.6V for its corresponding voltage.

The divider network works in two steps. First the input voltage is roughly halved by R32, the 100k resistor at the negative input. In the next stage (R4 to

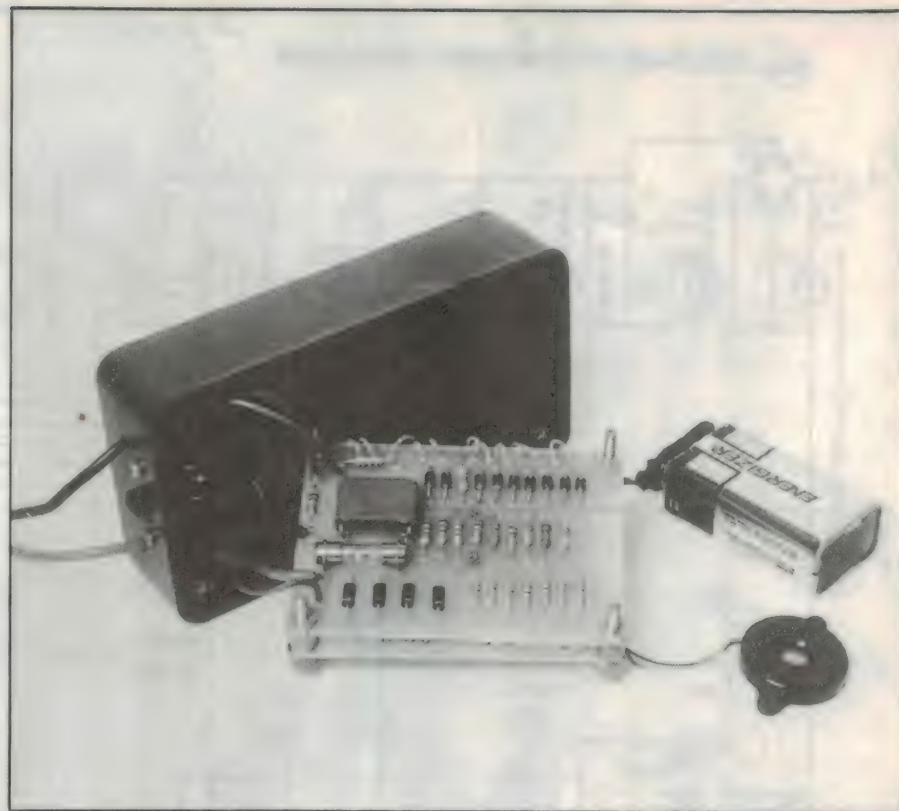

**Exploded view of the checker. The PCB sandwich lays loose in the case. Also note that the fuse is mounted with two wire straps.**

R16) the remaining voltage is divided down to 2.6V. The various branches give different division factors, as they're geared for different voltages.

The zener diodes (ZD3 to ZD9) limit the output of the divider network. When 415V AC is measured, the rectified voltage is almost 300V. This high DC voltage would result in high voltages at the outputs of the divider network even after it has been divided down to a lower level. So to protect the op amps, these zener diodes have been added to the network.



The resistor/zener diode combinations R1/ZD1 and R2/ZD2 give a polarity signal to the display unit.

The op amps of the display unit compare all the input signals from the divider network against a 2.2V refer-

ence. The normal output state of these op amps is high, a bit less than 8V. When the input signal of an op amp exceeds the 2.2V level, then the output concerned goes low, to about 1V. Those at the output of the polarity indicators are connected to the 9V supply rail via a resistor.

The LEDs at the outputs of the voltage indicators are linked (via a resistor) to the output of the next op amp stage. As a result, a LED will only light up when the output of the next stage is still high. This means that only the LED corresponding to the highest measured voltage will light up.


Transistors Q1 and Q2 function as an electronic ON/OFF switch. When a voltage is measured, the base of Q2 is driven via R3. Q2 in turn drives the

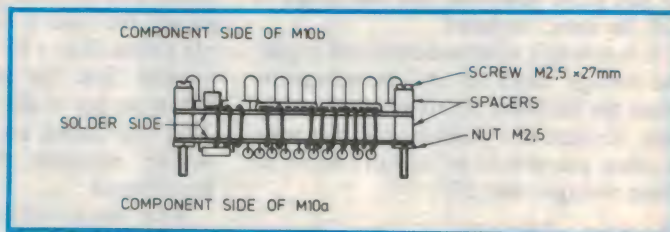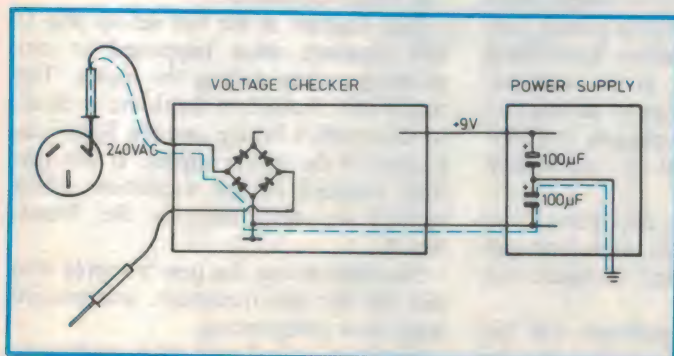

**The PCB assembly consists of the PCBs, eight spacers and four screws and nuts.**

**Fig.1: (left) This set up was disastrous for our prototype. The coloured line indicates the current path (refer text).**



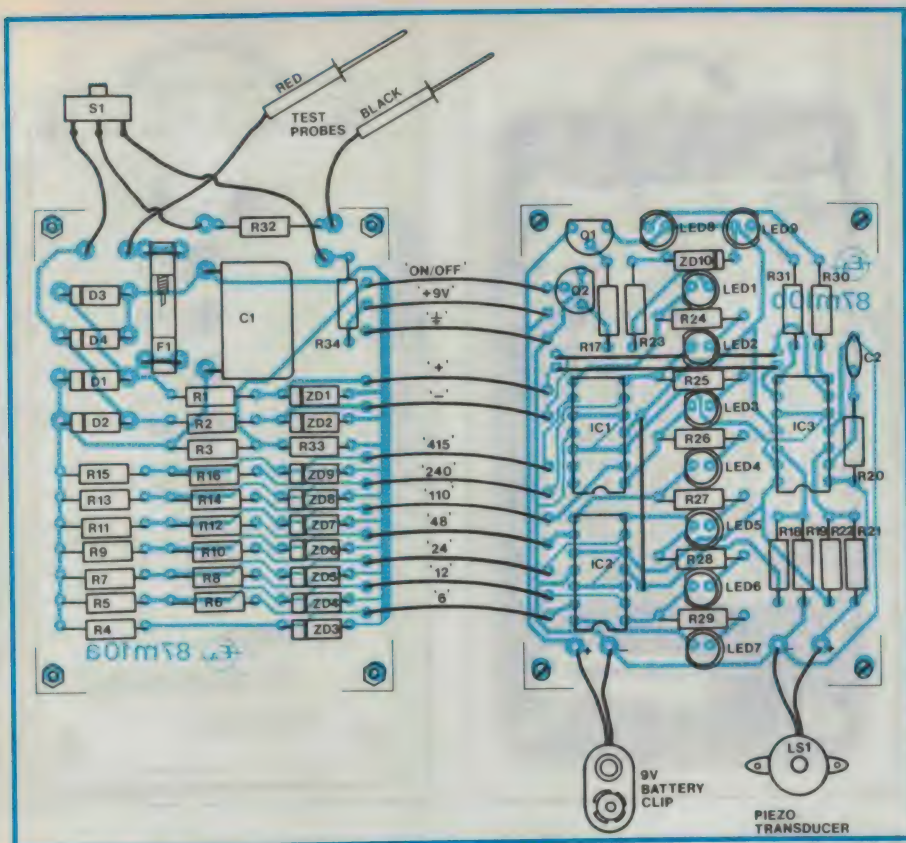

**Assemble the tester according to this wiring diagram. Note that not all the LEDs have the same orientation.**

base of Q1, which becomes conductive. The voltage drop over Q1 is very low, only about 100mV. The 2.2V reference is derived from the 9V supply and is buffered by op amp IC3d.

Op amp IC3a is wired as a Schmitt-trigger oscillator and generates a 2.5kHz signal to drive the loudspeaker, actually a piezo transducer. As this beep-generator is directly wired to the 9V supply rail, a tone will sound as long as there is power on the supply rail. This will be whenever a voltage is being measured.

So far we have been talking about the voltage tester. Let's put the switch in position 2 and look at the continuity tester. In this position, the 9V of the battery is fed to one of the probes. When a connection is made between the probes, the base of Q2 is driven by this 9V through R34, R32, D1 and R3. This switches Q1 on and the beeper indicates the continuity measurement.

When measuring continuity, the voltage at the divider network is about 4.5V. As a result, also the 6V LED and the "+" LED will light up. Incidentally the "-" will also light up for one second.

## Construction

To keep the voltage & continuity tester as small as possible, we have used all the space inside a small jiffy case. As

a result the tester consists of two printed circuit boards (PCBs), stacked on top of one another. The PCBs are coded 87m10a and 87m10b and each measure 53 x 72 mm.

The display LEDs are directly mounted on the top PCB and the two PCBs form a "sandwich". The two

layers are held together by four screws and are separated by spacers.

This "sandwich" lays loose in the jiffy case. The length of the four screws has to be adjusted so that the PCB assembly fits tightly in the case when the lid is screwed on. We have not used screws which penetrate the walls of the case, for safety reasons.



The construction of the PCBs is quite uncomplicated. Starting with 87m10a, the divider network, you first mount the resistors, the diodes, the capacitor and finally the fuse.

The fuse should in principle never blow. The only time that things can go wrong is when there is an accidental solder or copper bridge where it should not be. As this won't happen in most cases, a fuse holder is redundant. Accordingly, we soldered the fuse directly to the board with two wire straps.

Now the second PCB (87m10b) can be made up. Start mounting the wire links, followed by resistors, the zener diode, the ICs, the transistors and the capacitor. Take care with the orientation of the components.


Before mounting the LEDs, the lid of the jiffy case has to be prepared. Several holes have to be drilled. The easiest way to get the holes in the right place is to make a photocopy of the panel artwork and to stick that to the lid with sticky tape. Having done so you can easily drill the holes for the LEDs with a 5mm drill.

To mount all of the LEDs at the same height you should put the LEDs into place without soldering and assem-

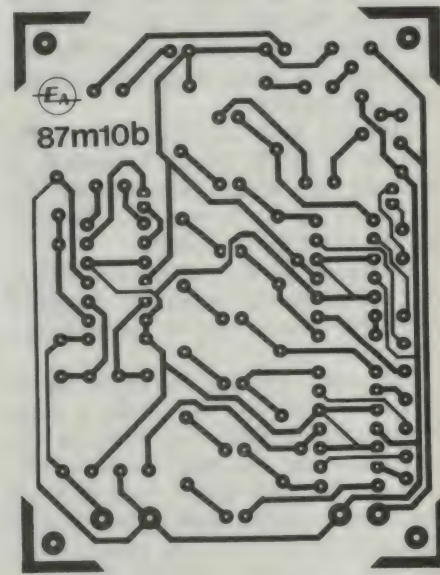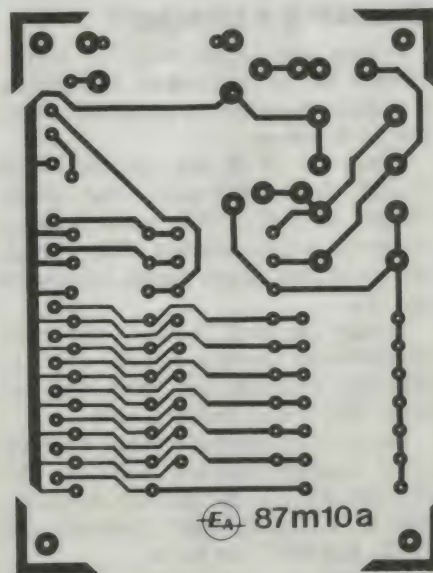

**An actual size reproduction of the PCB artwork.**



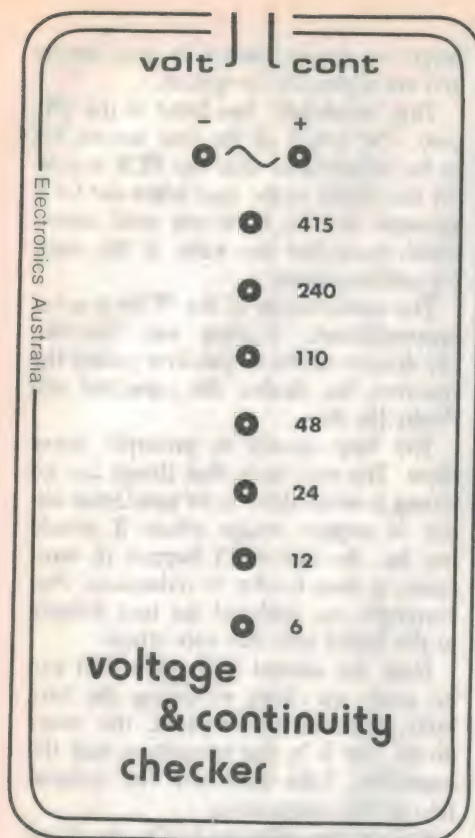

The actual size panel artwork.


ble the display PCB with the lid, using the proper spacers. Note that the lid is laying loose on the four screws. Place the lid on a flat working surface with two bits of PCB (or something similar) under the sides of the lid. Now push the LEDs down to the working surface which projects them about 2mm out of the lid and solder them.

You can now take the lid and the PCB apart and connect the two PCBs by wiring the links. The links should be about 20mm long. Also connect the battery clip, the piezo transducer and the wires for the switch.

The test leads are fed through the case, so two holes have to be drilled. In our case they were 2.5mm, but this depends on the leads you use. Also cut out the space for the switch.

To ensure good isolation and safety, the switch should preferably be glued inside the case so that no metal screws need to be used.

The panel artwork has been reproduced, so that you can make it from aluminium Scotchcal. The holes for the LEDs and the mounting screws of the case can be made with a 5mm drill, or use a sharp hobby knife after sticking the panel on the box. The tester should now be ready for assembly. Feed the test leads through the holes, make a knot in them at 50mm from the ends and solder them to the divider network

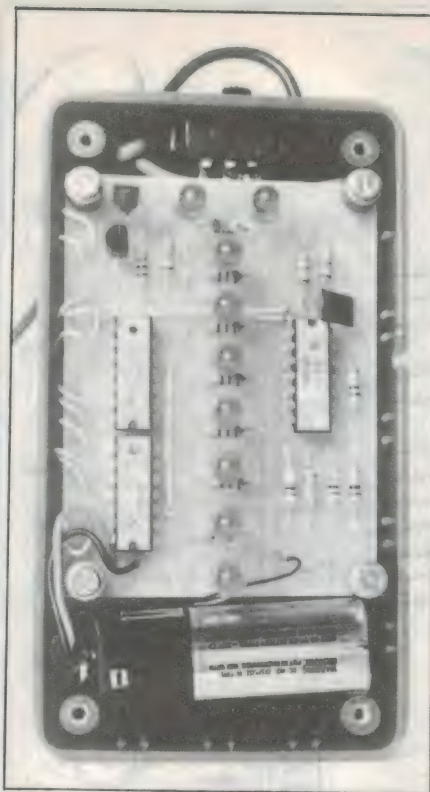

A look inside the checker...

PCB. Fold the two PCBs together with the copper sides inside, and assemble the boards.

The last step is to solder the wires to the switch, connect the battery and screw the lid on the case. The piezo transducer is placed on the bottom of the case. Put a bit of foam between the transducer and the PCB; this will improve the sound.

### Checking a checker?


It may sound a bit much but even a checker has to be checked. In our case it is quite important as accidental shorts can be disastrous.

When the PCBs are assembled you should check thoroughly for solder bridges or faulty PCB tracks (copper bridges or hairline cracks). Also recheck the orientation of the diodes, transistors and ICs.

Testing the final checker, start with the continuity checker. Put the switch in the right position and short the test leads. The beeper should sound.

The voltage checker should then be tested starting with low voltages: 6V, 12V and 24V. If the checker works alright at the low voltages, then you can try the real stuff, the mains.

Just be sure you observe the usual precautions when making checks on mains wiring. We don't want to lose a single reader!

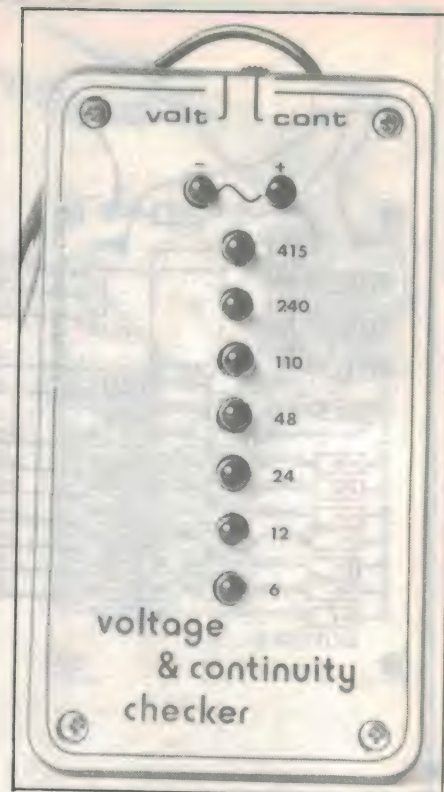

... and with the lid safely attached.

### Parts list

- 1 PCB coded 87m10a, 53 x 72mm
- 1 PCB coded 87m10b, 53 x 72mm
- 1 plastic utility case 30 x 60 x 110mm (Tandy)
- 1 piezo transducer, should be less than 5mm high
- 1 switch SPDT
- 1 fuse, 100mA
- 1 pair of test leads
- 1 9V battery snap
- 1 9V battery, 216 or similar

### Semiconductors

- 3 LM324 quad op amp
- 1 BC557 PNP transistor
- 1 BC547 NPN transistor
- 9 8.2V zener diodes
- 1 3.3V zener diode
- 4 1N4007 diodes (1000V)
- 9 LEDs, 5mm red

### Capacitors

- 1 47nF/630V capacitor, metalised polyester
- 1 8.2nF capacitor, greencap or similar

### Resistors (5%, 0.25W unless noted)

- 1 x 100k, 0.5W, 5%
- 6 x 270, 3 x 560, 1 x 10k, 1 x 15k, 1 x 27k, 1 x 33k, 1 x 56k, 5 x 100k, 1 x 150k, 1 x 270k, 1 x 470k, 1 x 820k, 10 x 1.2M

### Miscellaneous

- screws, nuts, spacers, hookup wire, solder etc.



# Ready for the BIG ones in 88?

What a year on TV! The Bicentenary — think of the coverage that'll have. And the Olympics — sensational!

Is your TV antenna system up to it?

If it's typical of most, it's not (up to it, that is!). Probably put up when TV started (that's over thirty years ago!); the antenna's probably broken, corroded or bent, the lead-in's probably pretty suspect too.

Fix them — before '88. And get ready for the Big Events of '88!

## The Right Antenna for YOUR Area . . . at the Right Price!

### ALL PACKS ONE SPECIAL LOW PRICE: \$39<sup>95</sup> EA!!!

That's right: DSE's special VHF/UHF antenna pack suiting EVERY local area translator in Australia! We've put together a number of special antenna packs to ensure that no matter what combination of VHF & UHF bands, or polarities, you're covered! Don't know which one you need? Ask us!

(Note: Many areas do not yet have local area translators. In that case the L-4025 antenna will normally suffice).

Specific Area Packs:

Most areas: Combination VHF/UHF band IV (SBS) L-4001  
Canberra: Two antennas in pack (VHF & band V UHF) L-4002  
Newcastle/Wollongong: Two antennas in pack L-4003  
Ballarat: Special channel 3 & 6 VHF Antenna L-4006  
Bendigo: Special channel 1 & 8 VHF Antenna L-4007  
Albury: Special channel 1 & 4 VHF Antenna L-4008

Order by phone: 24 hour despatch through DSXpress.  
CALL TOLL FREE (008) 22 6610 (Sydney Area, call 888 2105)



### More than one TV?

Don't just connect them together: it doesn't work! Use a splitter for optimum performance — sets won't interfere with each other.

Cat L-4472

**\$5<sup>45</sup>**



### Two Antennas?

UHF & VHF Antennas don't need two lead-ins. Save money by using a diplexer — one lead in is much more convenient (saves madly swapping leads!) Cat L-4470

**\$4<sup>95</sup>**

### Cable:

DSE stocks top quality TV cable in both 75 ohm coax and 300 ohm twin lead.

75 Ohm — Air dielectric, low loss cable for external/internal installations. Dual shielded (foil/braid) with UV stabilised outer cover. Cat W-2082

300 Ohm — UV stabilised twin flat ribbon, low loss. Cat W-2070

### Need more Signal?

We have two amplifiers which might solve your problems . . .



### Masthead Amp

Especially for long range viewing, a masthead amp often works wonders. Amplifies signal right at the antenna — away from the noise — for best possible results. Complete with mains supply. Cat L-4200

**\$75**



### In-line Amp

Especially suitable for multi-set use, great for VCR signal amplification. Simply plugs into output of VCR, splitter, etc. and lead to TV plugs into it. Mains power adaptor required. Cat L-4202

**\$29<sup>95</sup>**

### Need that extra range on VHF?

For country viewing (deep fringe area) or where signal levels are very low (shielded, etc) you'll probably need one of the "big guns": the phased array. High gain, high performance on all high VHF channels. Suitable for horizontal or vertical mounting. Cat L-4025


**\$99**



### How About FM Radio?

For best results an outside FM antenna is essential. Ours is specially designed for the FM band, can be erected in either polarity. 300 ohm type. Cat L-4064

**\$34<sup>95</sup>**



### Coax Extension Lead

Perfect for wall socket to TV, VCR to TV, etc. 1.2m coax lead with male plugs both ends. Cat L-4506

**\$4<sup>50</sup>**

### Wall Sockets for Coax Cable

Two different types to choose from for that really professional installation: **Skirting board type** — Small and unobtrusive Cat L-4504

**\$4<sup>95</sup>**



**Wall Plate type** — fits over standard wall box, can also be used as 75 ohm splitter for second or third TV. Cat P-2042

**\$4<sup>35</sup>**



# DICK SMITH ELECTRONICS

PTY LTD



# Build (or give!) a Kit this Kitmas...

Kits make great gifts: beats a pair of sox anytime!

## Dick Smith's own Fun Way Into Electronics

Here's great value: the Fun Way One gift box. All the components needed to build any of the projects in Fun Way One... and the book is included too! All this for under \$25! Cat K-2605  
Projects to build include:  
Dog & Cat Communicator  
Beer Powered Radio  
Morse Code Practice Set  
Crystal Sets  
Mini Amplifiers And much, much more **\$24<sup>50</sup>**




## Fun Way One Project Packs

Two project packs to allow you to build any of the kits. Project Pack One allows you to build any of the first ten kits in Fun Way One. Project Pack Two gives you the additional components required to build any of the 20 kits (needs Pack one too!) Note - Fun Way One book is NOT included with these kits.




Fun Way One: Project Pack One Cat K-2600 **\$8<sup>95</sup>**



Fun Way One: Project Pack Two Cat K-2610 **\$9<sup>95</sup>**

## Fun Way TWO

Ready for something more advanced? Fun Way Two has another twenty projects to build - all on modern printed circuit boards. And we even teach you how to solder!



Fun Way Two Bonus Pack includes the Fun Way Two book, a quality soldering iron, a pack of solder, a nine volt battery, AND the most popular kit in Fun Way Two: the Wireless Microphone. Cat K-2620 **\$26<sup>95</sup>**


## Fun Way THREE

The real professionals! Build the Fun Way Three kits and you'll be ready to tackle most projects. The Fun Way Three Bonus Pack includes the Fun Way Three book and not one, but TWO popular Fun Way Three kits: the Cricket and the Mini Amplifier. Great value! Cat K-2670 **\$29<sup>95</sup>**



## One, Two and Three Gift Box

If they're really into electronics, they'll LOVE the gift box. It has kits to build from all three Fun Way books: nearly one hundred dollars value for only \$59.95! Build a flashing brooch, a wireless microphone, cricket, mini amplifier and more. Cat K-2680 **\$59<sup>95</sup>**




## And the really big one... Get the Jumbo Gift Box!

Over thirty great projects to build from all three Fun Way books. And the books are included! Over \$120 worth of goodies crammed into this value-packed box. Any kid from 6 to 60 would think it was Christmas. (Now that sounds like a good idea!). Cat K-2690 **\$99<sup>95</sup>**

## How do you test a Zener?

Let's see. Out with the power supply. Work out the series resistor. Get the voltmeter and put it across the zener. Turn on the supply. Woops! Wrong resistor. One cooked Zener... Or you can build the Zener Diode Tester. Very simply and accurately checks Zeners without danger. Especially handy in the service lab when the markings are worn off! Cat K-3051 **\$29<sup>95</sup>**




## Look Mum. No Bike!

Bikes (the vroom vroom variety) are, unfortunately, very vulnerable. Don't become the victim of a very vulnerable vroom vroom. Fit a bike alarm to your bike and it'll scream its head off if some light fingered larrikin tries to lift it. Easy to build, easy to fit - suits most bikes. Cat K-3249 **\$39<sup>95</sup>**

## And one for the Car, Too!

Police statistics are staggering: and your car could be next. Build this simple alarm and the odds are back on your side. It's very easy to make, operates on "voltage drop" principle so no holes are needed for key switches, etc. It works! Cat K-3250 **\$16<sup>95</sup>**



**DICK SMITH ELECTRONICS**  
ESTD 1970

ORDER BY PHONE: TOLL FREE  
DSXpress ON (008) 22 6610  
For 24 hour despatch


## Or the Deluxe Job

The ultimate in protection! One of the best alarms around - better than most commercial units. Includes its own siren output (doesn't rely on car horn), has provision for back-up battery... and it's about the best investment you could make for your car. Cat K-3252 **\$79<sup>95</sup>**



## Add an Ignition Killer for 100% Protection

Nothing's worse than a car that misbehaves. Especially if you're trying to knock it off. Imagine. It starts, but very soon splutters and stops. Bill Sykes thinks the car's crook and goes off searching for another! You return to your car, reset the ignition killer - and drive away! Cat K-3255 **\$22<sup>95</sup>**



## Want a GREAT AMPLIFIER?

Build yourself a MOSFET AMP. It's great! And our value-packed kit makes it even greater! 42 watts per channel into 8 ohms - with professional specs and features. Comprehensive step-by-step manual included to make it easy on you. Compare it to commercial amplifiers at three and four times the price! Cat K-3515 **\$219**



## 70cm YAGI KIT

Build your own Yagi for UHF. This 13 element design is simple to construct (all the hard work is done for you!) Strictly while stocks last. Cat K-6305 **\$29<sup>95</sup>**

**\$29<sup>95</sup>**



## 70cm Phasing Harness

Want to stack a couple of Yagis for more gain? Use this ready-made Phasing Harness. At UHF every uB (microBel - as distinct from dB) is a help - so help yourself! Cat K-6299 **\$10<sup>95</sup>**



**While stocks last!**




# Do it Yourself!

The poor old hobbyist or engineer wanting one-off pcb's: prototype boards from the manufacturers have been horrendously expensive, making your own always lacked that professional quality!

## DATAK

Until now! Dick Smith Electronics is proud to introduce you to the "Datak" range of US-made pcb materials. Top quality, easy to use, make a professional product... yet extremely good value. What more could you want?

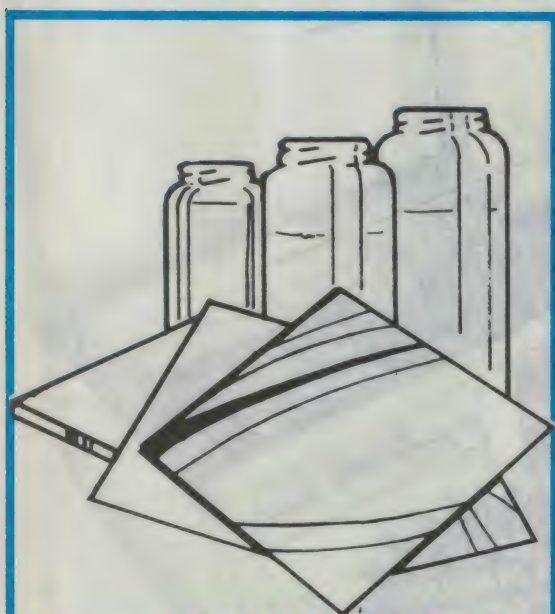

### Complete Photo Tech PCB Kit

It's so simple! This kit contains everything the hobbyist or workshop could want to make pro-quality PCB's: 125 x 150mm still printing frame, pos-neg film, film processing pack, yellow filter, 100g negative acting etch resist, resist developer, blank pcb's, dry concentrated etchant, 1:1 resist patterns and tapes and, best of all, COMPLETE INSTRUCTIONS.

Cat N-5700

**\$104<sup>95</sup>**

### Individual Components to Build Up or Replenish your Packs.

#### Photofilm Sheet

Makes film positives from magazine art, 1:1 patterns on film, etc. Two sizes available: 125 x 150mm (6 sheets) Cat

N-5705 **\$18<sup>85</sup>**

200 x 275mm

(2 sheets)

Cat N-5709

**\$48<sup>85</sup>**

#### Film Processing Chemical Pack

Processes either of above photofilm sheets.

Cat N-5909

**\$11**

#### Tin your PCB pattern

Avoid oxidation & contamination of patterns: tin them without mess or electricity. Soluble powder puts bright tin plate over copper of pcb, ready for soldering. Cat N-5730

**\$12<sup>55</sup>**

#### Circuit Fix-It

Damaged PCB? Fix it easily and simply with this one. Pure copper pads, sheets on self-adhesive carrier to allow virtually any repair. Cat N-5900

**\$62<sup>95</sup>**



#### Dry Transfers for Panels, projects

Choice of three types for that real "factory made" appearance.

(1) Switches and Marks 2 sheets each of black and white. Cat N-5750

**\$11<sup>95</sup>**

(2) PCB pads, fingers, etc. DIL, surface mount and component donuts all in one handy pack. Cat N-5766

**\$19<sup>95</sup>**

(3) Targets. A must for accuracy in pcb making especially on double sided boards! Cat N-5820

**\$7<sup>95</sup>**

#### Contact Printing Frame

**\$35<sup>65</sup>**

Pro quality frame makes negs or pos up to 225 x 300mm, from film pattern or even direct from printed magazine pages. Contains spring loaded steel exposing frame with glass, backboard, yellow filter & instructions.

Cat N-5710

#### Yellow Filter

215 x 295mm yellow filter for exposing Datak light-sensitive products to pcb patterns. Full instructions included with

master kit. Cat N-5711

**\$10<sup>45</sup>**

#### Burnishing Tool

Sure beats using the old ball-point pen! Professional quality results demand a professional approach. Aluminium ball one end, flat pastic the other. Cat N-5715

**\$10<sup>45</sup>**



#### Photoresist Made Easy

Spray pump of negative photo resist (118ml) ready for coating blank pcb's. Easy to use, no tight tolerances required for heating, etc. Cat N-5907

**\$18<sup>95</sup>**



#### Resist Developer

Suitable for above resist. 473ml tin.

Cat N-5905 **\$11<sup>95</sup>**



• NSW • Albury 21 8399 • Bankstown Square 707 4888 • Blacktown 671 7722 • Blakehurst 546 7744 • Bondi Junction 387 1444 • Brookvale (Warringah Mall) 93 0441 • Campbelltown (046) 27 2199 • Chatswood Chase 411 1955 • Chullora 642 8922 • Gore Hill 439 5311 • Gosford 25 0235 • Hornsby 477 6633 • Liverpool 600 9888 • Maitland 33 7866 • Miranda 525 2722 • Newcastle 61 1896 • North Ryde 88 3855 • Parramatta 689 2188 • Penrith (047) 32 3400 • Railway Square 211 3777 • Sydney City 267 9111 • Tamworth 66 1711 • Wollongong 28 3800 • ACT • Fishwick 80 4944 • VIC • Ballarat 31 5433 • Bendigo 43 0388 • Box Hill 890 0699 • East Brighton 592 2366 • Coburg 383 4455 • Essendon 379 7444 • Footscray 689 2055 • Frankston 783 9144 • Geelong 43 8804 • Melbourne City 670 9804 • Richmond 428 1614 • Ringwood 879 5338 • Springvale 547 0522 • QLD • Brisbane City 229 9377 • Buranda 391 6233 • Cairns 311 5151 • Chermside 359 6255 • Redbank 288 5599 • Rockhampton 27 9644 • Southport 32 9863 • Toowoomba 38 4300 • Townsville 72 5722 • Underwood 341 0844 • SA • Adelaide City 232 1200 • Beverley 347 1900 • Darlington 298 8977 • Elizabeth 255 6099 • Enfield 260 6088 • WA • Cannington 451 8866 • Fremantle 335 9733 • North Perth 328 6944 • Perth City 481 3261 • TAS • Hobart 31 0800 • NT • Stuart Park 81 1977

Order by phone: 24 hour despatch through DSXpress.  
CALL TOLL FREE (008) 22 6810 (Sydney Area, call 888 2105)

## DICK SMITH ELECTRONICS



IT HAD  
TO HAPPEN!

# BUILD-IT-YOURSELF 'AT' COMPUTER!

At last! The perfect opportunity for the hobbyist to build the perfect computer. . . Perfect because it has in it what YOU want! All the features of the "AT" - blinding speed, high expandability, and so on - but you put it together yourself - and \$ave!

There's more: each board or module comes with a full 12 month warranty PLUS individual, professionally prepared manuals - no Jinglish to decipher!

And best of all, you don't have to buy it in one hit: add what you want, when you want it (and when the pocket allows it!)

## Look at the features:

### SUPERB QUALITY HINGED CASE

"Baby AT" case in heavy gauge steel, heavily covered in damage-resistant bone crinkle finish. The lid is hinged and locks up for instant internal access - no more undoing screws! Large enough for expansion - but features a footprint of just 430mm square! Cat X-1005

ONLY \$175

### 200W POWER SUPPLY

Completely pre-assembled - even to the on/off switch and input sockets! Simply slots into place in cutouts provided in case. Heavily plated steel case for minimum RFI with integral whisper-quiet fan. 200W capacity is ready for . . . anything! Cat X-1010

ONLY \$275

### "BABY AT" MOTHERBOARD

Again, completely pre-assembled. No risk of dry joints - you just connect appropriate cables (as described in detailed manual included). On-board capacity for 1Mb RAM and 8 slots for expansion in true "AT" format. Offers 6, 8, 10 & 12MHz speed (switch & software selectable) giving outstanding software compatibility PLUS blinding speed when you need it, and time & date memory with battery back-up. Cat X-1000

JUST \$995

### PLUG-IN CARDS

Cards for the various graphic standards, printer ports, serial ports, etc etc. Choose the one that suits your requirements - and remember, you can always upgrade later!

CGA plus Parallel Printer Card Cat X-2010 \$129

MGA plus Parallel Printer Card Cat X-8141 \$149

EGA Card with Hercules compatibility Cat X-2013 \$399

Serial/Parallel/Game Card Cat X-2012 \$139

### DISK CONTROLLERS

Your choice of hard/floppy or floppy disk controller card: choose the one that suits your needs best. Both plug in to motherboard.

Floppy Controller (2 disk drives 1.2Mb or 360Kb) Cat X-2014 \$129

Hard/Floppy Controller (2 of each) Cat X-2008 \$399

### DISK DRIVES

Also include appropriate cables.

1.2Mb Floppy Disk Drive Cat X-2200 \$269

20Mb Hard Disk Drive Cat X-2203 \$795

(Other higher capacity Hard Disks available if required)

### KEYBOARDS

Two types available:

84 Keys with top quality "Alps" keyswitches Cat X-3820 \$129.00

101 Keys - with numeric keypad Cat X-3821 \$149.00



## WHERE ELSE BUT

**DICK SMITH  
ELECTRONICS**

PTY LTD

DSEB450/RT1087



# Bargraph

## Multimeter

Finally, an LCD Multimeter which accurately shows analog-type readings! All those essential dynamics that are often lost on a DMM... often it's not so much a reading you're after as the change in readings!

But there's more: the information is displayed in "bar graph" format for instant recognition and ease of reading. And if you need to expand the scale, it's a simple one-button operation to go to a 10x magnification!

Plus a data hold function (last reading retained), a maximum hold function (highest reading retained & marked, but readings continue), diode check & continuity, etc, etc: it's one of the best general purpose multimeters available today — simply because it does everything better!



**\$149**

- 105 step LCD bargraph display giving 1% resolution on any scale (eg 10 volts on 1000V range with mag pressed).
- Fast 10/second sampling rate for virtually instantaneous display (much faster than most digitals).
- Automatic positive or negative indication
- DATA Hold key freezes reading immediately previous to pressing. This can then be magnified (by up to 10:1) for a more accurate and precise reading.
- 6 DC ranges (down to 100mV with virtual 1mV sensitivity), 4 AC ranges, 5 resistance, 3 DC plus diode check and continuity ranges.
- Single input terminals mean no swapping of leads when you change to different scales. Fully shrouded test leads supplied, with full instructions.

Cat Q-1777

### Specifications:

DCV: 100mV, 2.5V, 10V, 50V, 250V, 1000V, 5Mohm impedance

ACV: 10V, 50V, 250V, 750V (minimum 5k/V, 25k/V on 10V)

DC: 2.5mA, 25mA, 250mA

Res: 250 ohms, 2.5k, 25k, 250k, 2.5M

Cont: 250 ohms max, continuity beeper approx <100 ohms

Diode: Test current approx 0.5mA, reads  $V_f$  on display

Measuring Method: dual integration mode

Sampling: 10 times per second

Power: 1.5V (AA) x 2

Battery Life: Approx 800 hours or more.

Size: 145 x 86 x 34mm (w x h x d)

Weight: Approx 250g (inc batteries).

**Available exclusively from  
Dick Smith Electronics**

**ORDER BY PHONE: TOLL FREE  
DSXpress ON (008) 22 6610  
For 24 hour despatch**

**DICK SMITH  
ELECTRONICS**

PTY LTD




# Just for the Kiwis!

## Super Special Phone Accessories!

### Phone Plug

High quality modular phone plug. Accepts standard 4-wire phone cable. Cat F-9001




### Move the Phone

18 foot Extension Cord with plug and socket! Cat F-9008




### Double Adaptor

For when you want to run an answer service or a spare phone. Cat F-9002




### 50' Cord Caddy

Take the phone into any room with this 50' extension cord. Caddy keeps it neat and out of harm's way! Cat F-9020




### Phone Connecting Tool

If you're working with phone cable for installation, repair... whatever — you need one of these! Makes it easy! Cat F-9025



### 4 Core Phone Cable

Bargain priced colour coded cable as used for telephone connections. Cat W-2120



## Repair Kit With Multimeter

Everything for quick and easy wire repairs! Kit comes with Multimeter, Crimp Tool, Pliers, Screwdrivers, Tape, Crimp Lugs and more! Cat T-4832



## 12V Piercing Cable Tester!

Great value for auto electricians or home users! Tests 12V cables without disconnection. Even doubles as a battery tester! Cat Q-2000



## What's your Vice?

If it's not one of these fantastic Arlec Mini Vices then you haven't got the best! Every workshop needs one! Cat T-4748




## Fantastic!

\$14<sup>95</sup>

## Low Cost Transformer

Ideal for hundreds of projects! 240 volt, 50Hz primary with 1A secondary tapped at 6.3, 7.5, 8.5, 9.5, 12 & 15 volt. Cat M-2155




## Value Packed AM CB!

For the CB'er who wants it all! Maximum power, performance and features with the Maxon 21 AM CB. Comes with mic, full mounting hardware and instructions! Cat D-1447

\$295

## Supersaver Supertool!



Save \$30!! The incredible Arlec Supertool — it grinds, polishes, drills, mills and erases! The perfect work companion. Cat T-4754

WAS \$129

NOW! \$99

## Quality Autoranging DMM

It even has a memory! Ideal for the service technician or the hobbyist. Great range, fantastic features! Cat Q-1516



\$129

## Huge Saving!

Save \$50! The incredible Playmaster 200 Hi-Fi Mosfet Amp kit is the best build it yourself design ever published! Enormous 100 watts per channel and the best performance figures you're likely to see! Cat K-3516



WAS \$699

NOW \$649

## 4.5 Digit with Data Hold

Yes it holds the reading till you clear it! Fantastic for problem solving work. With 20A AC/DC range! Professional quality at a DSE price! Cat Q-1600



\$249

## Teach Yourself Electronics!

With FunWay 1 you won't only learn the fundamentals of electronics but you'll have FUN and build yourself some fantastic projects. There's no soldering! Cat K-2605



\$29<sup>95</sup>

## The Electronic Receptionist!



The most advanced Telephone Answering Machine calls any messages to any predetermined number to advise 'call waiting'. You won't believe what it'll do! Cat F-6147

\$595

## 'The Answer' TAM Tape

Telephone answer machines are usually boring — but not anymore! With this fantastic tape you get 10 funny TAM messages and 10 not so funny. Change it every day! Cat F-9050

\$29<sup>95</sup>

## Your Best Reception Yet!

### Rugged Antenna Base

Great value! 5/16" antenna base with 3 metre cable and PL259 assembly — ready to fit! Cat D-4055

\$29<sup>95</sup>

### 30cm Rubber Duckie

Does the right job without advertising it! With standard 5/16" thread base for use with most mounts. Cat D-4063

\$24<sup>95</sup>

### Black Mounting Base!

Waterproof when properly installed! Includes coax mounting plate and 5/16" mounting stud. Cat D-4056

\$9<sup>95</sup>



### Flexible Base Spring!

Designed for standard load 1/4 wave mobile whips. Saves breaking the antenna on those low car parks, trees, etc! Cat D-4500

\$16<sup>95</sup>



### 150cm Pretuned Antenna

Pretuned helical is just right for vans and larger vehicles. The big gun for big performers! Cat D-4060

\$49<sup>95</sup>

### Universal Mirror Mount!

Allows you to mount your antenna on the roof rack or mirror. Made from plated steel! Cat D-4512



\$9<sup>95</sup>

### 95cm Pretuned

The great 'all rounder'! Flexible fibreglass tapered whip with standard 5/16" base. Cat D-4061

\$29<sup>95</sup>

### Boot Mount

Made from stainless steel the boot mount lets you mount your antenna on the boot without scratching the duclo! Cat D-4515

\$39<sup>95</sup>



### Adjustable Helical!

Approx. 90cm long with top loaded helical winding and adjustable stub! Allen key included for SWR adjustment. Cat D-4062

\$39<sup>95</sup>

### Root Rack

Quality square frame roof rack with antenna mount! The 'No Holes' way to do it! Cat D-4521

\$29<sup>95</sup>



• Auckland City (09)38 9974 • Avondale (09)88 6696

• Christchurch (03)50 405 • Dunedin (024)74 1096 • Hamilton (071)39 4490

• Lower Hutt (04)66 2022 • Newmarket (09)393 192

• Papatoetoe (09)278 2355 • Porirua (04)37 6654 • Tauranga (075)87 071

• Wellington (04)73 9858

DSXpress Phone Orders: (09) 392 997

**DICK SMITH ELECTRONICS**


PTY LTD



## PRODUCT REVIEW:

# The Bit Blitzer 12E automatic modem

Always hankered for one of those fancy auto-dialling, auto answering modems to go with your personal computer, but found the price too daunting? Your wait might well be over...

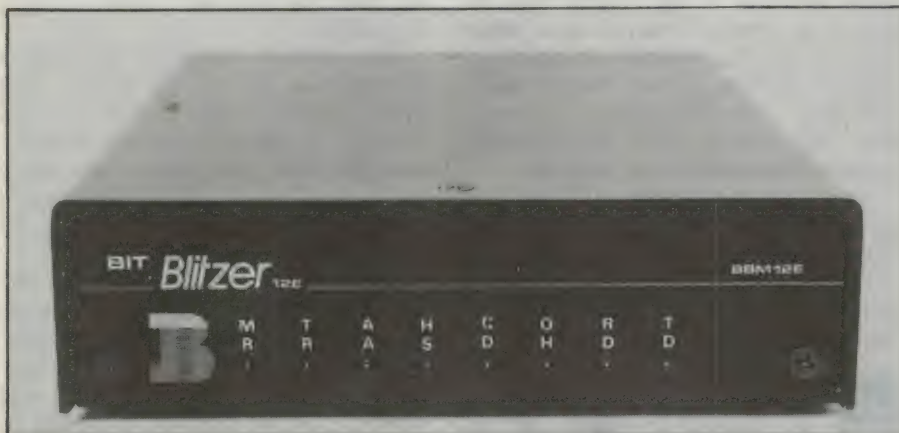

How much would you expect to pay for a Hayes-compatible automatic modem with the facility to operate in full duplex mode at both 1200bps (V.22) and 300bps (V.21)? Until very recently, you wouldn't get much change out of \$800.

That's why our ears immediately pricked up when the marketing people at Dick Smith Electronics asked if we'd like to check out a new modem they've just added to their range — offering these features for only \$399! Needless to say we got them to send one over straight away.

It goes under the somewhat fanciful name of "Bit Blitzer", and as you can see from the picture it comes in a neat but solid little black anodised aluminium box measuring only 190 x 133 x 40mm. This is just big enough for a standard Telecom Colorfone to sit on top, if you're really short of desk space. The Blitzer is made in Hong Kong, we discovered, by a firm calling itself Bank-sia Information Technology (BIT).

To emphasise that it's fully automatic, there are essentially no manual controls at all. On the front panel, there's simply a row of LEDs to indicate operating modes and the status of various signal

and control lines. At the back there's a socket for the 12V DC power input, a DB-25 connector for the RS-232C serial cable from your computer, and a couple of the compact "modular" telephone sockets — one for the line cable from the Telecom phone socket, and the other for an optional phone. A matching 12V plug pack is supplied, plus a cable to connect the modem to the Telecom line socket.

There's also a very easy to follow driving manual, without a trace of the half-expected Chinglish.

Actually it's not quite right to say that there aren't *any* manual controls. If you turn the Bit Blitzer upside down, you find a little window in the case providing access to a 10-pole DIP switch used to configure the various operating modes and parameters. Alongside there's also a convenient data panel, explaining each switch's function and its action in each position.

Basically the 10 switches control the operation of RS-232C handshaking lines like DTR, DSR and CD; whether the modem is to operate to CCITT or Bell (US) standards; whether the internal speaker is to have high or low volume; and various aspects of its operation in

automatic mode.

We took a peek inside the case, and discovered a very neatly made PCB which occupies virtually the entire area. Literally everything is mounted on the board, too; there's no conventional wiring at all. The board isn't all that crowded, either. Fairly obviously all of the built-in "brains" is housed in a pair of fancy LSI chips; apart from these there's only a few "glue" chips plus the usual passive parts, line coupling transformer and dialling relay. All very neat and tidy.

Using the manual as a guide, we had no problem in configuring the Blitzer and hooking it up to an IBM PC. In fact it turned out to be somewhat easier than some of the simpler manual modems we've tried.

We gave it a try with the prize-winning Australian data communications program Supercom2, designed to work with Hayes-compatible automatic modems. It worked with the Blitzer exactly as expected, and the Blitzer itself seemed to perform just as it should, responding without a murmur to the Hayes AT command set. In short, we couldn't fault it.

No doubt about it, an automatic modem is certainly a lot more convenient than the old manual clunker we ourselves have been using. There's no fiddly switching, no looking up the numbers and manual dialling — just the pleasure of pressing a few keys, and waiting while the Blitzer does it all for you!

So if you're looking for an automatic modem that does just about all the right things but won't break your personal bank, the Bit Blitzer is well worth considering. It seems to us excellent value at the quoted price of \$399.

About the only thing the model 12E won't do is operate at the split 1200/75 baud rate (CCITT V.23) used by Telecom's Viatel and other videotex services — and I'm told there's another model coming shortly that will do this as well. Needless to say, though, it'll be a little more expensive. (J.R.)



# Semiconductor Devices

by JIM ROWE

## 1 — Introduction

This is the first of a series of short articles designed to provide an easy to read introduction to the various kinds of semiconductor device and their basic principles of operation.

We won't be going into a lot of solid state theory or maths. The idea is to give you just the essential concepts, which are generally all that are needed for both the hobby enthusiast and the working technician. They're also a good starting place if you do want to go into things more deeply. Those who do want to go a little deeper into solid state theory might like to refer to my book *Fundamentals of Solid State*, copies of which are still available via our Reader Services department.

I thought we'd start the ball rolling this month with a few general points about semiconductors, and introduce some of the jargon.

Basically all semiconductor devices depend on the peculiar electrical behaviour of *crystals* formed from a group of chemical elements and compounds known as — you guessed it — *semiconductors*. As the name itself suggests, these are different from normal metallic conductors like copper, silver or gold. In fact pure semiconductors like silicon or germanium often have more in common with insulators such as the ceramics, than they do with normal conductors.

Actually most semiconductor devices are based not on pure or *intrinsic* semiconductor crystals, but on crystals into which have been introduced tiny amounts of other elements, known as dopants. The effect of these is to modify the electrical behaviour of the crystal dramatically, making it a much better conductor — but in two different and almost "opposite" ways.

One kind of dopant element, called a *donor*, creates an excess of conduction electrons in the crystal, allowing it to conduct a current in much the same way as do metals — with electrons going from negative to positive. The resulting semiconductor crystal is known as *N-type material*.

But the other kind of dopant, called

an *acceptor*, creates a shortage of valence electrons in the crystal. This allows it to conduct current in a rather different way from metals, via positively charged electron gaps or "holes" which effectively flow from positive to negative. This type of doped semiconductor crystal is known as *P-type material*.

Now a uniform chunk of either kind of doped semiconductor crystal isn't all that exciting by itself. The really interesting things generally only start to happen when we create different N-type and P-type regions alongside each

other, in the same crystal.

What happens when we do this is that the *junctions* formed between the adjacent regions turn out to have all sorts of interesting electrical properties. They generally conduct current much better in one direction than the other, for example, so that a simple P-N junction can form the basis for a diode detector or rectifier.

The current conducted by such a junction can also be affected by light falling on the crystal, allowing it to be used as a photodetector. Conversely, with the right construction, a junction can be made to *produce* light when it conducts a current — making possible the LED and the semiconductor laser.

The current conducted by one forward-biased junction can also be made to influence the behaviour of another, reverse biased junction nearby — causing it to conduct, when it otherwise wouldn't. As we shall see later, this effect makes possible the bipolar transistor.

A reverse-biased junction can also be made to control the current conduction of a narrow uniform region nearby, to produce the basic effect used in the junction FET or field-effect transistor.

There are a lot of other semiconductor devices that you'll come across nowadays, and we'll try to cover most of the main ones in this series. The main thing to bear in mind is that just about all of them are based on the behaviour of an interaction between N-type and P-type regions formed inside crystals of semiconductor material. And in most modern devices the basic semiconductor material is either the element *silicon*, or (much less frequently) the compound *Gallium Arsenide*.

Early devices were made from the element *germanium*, but this proved to be not nearly as satisfactory as silicon.

How are the various N-type and P-type regions formed in a crystal of silicon? In a variety of ways. Traditionally, one of the most common is to expose slices or *wafers* of the crystal to a hot vapour containing molecules of the dopant element, for some hours. This causes dopant atoms to penetrate into the crystal a short distance, a process



**Probing a newly-made experimental chip, to check its performance.**  
(Courtesy IBM)



known as *diffusion*. Another way is to bombard the surface of the crystal with molecules of the dopant element, by turning them into electrically charged ions and accelerating them using an electric field. This much faster and more modern technique is known as *ion implantation*.

In both diffusion and ion implantation, the area of the crystal surface to be doped is defined by masking, using patterns which are photo-etched into a protective layer of silicon dioxide (quartz) or silicon nitride previously grown on the surface.

By performing a number of different masking and diffusion or ion implantation steps, using both donor and acceptor dopants, it is possible to produce quite a number of adjacent N-type and P-type regions in the crystal, as desired. This is how a great many semiconductor devices, both discrete and integrated, are made.

By the way, the active part of most semiconductor devices must be made from quite lightly doped N-type or P-type material, to allow it to be turned into the various regions required. But because lightly doped semiconductor material is a relatively poor conductor, heavily doped (and therefore low resistance) material is used to make up the bulk of the crystal. The lightly doped layer used to form the active regions is generally grown on the surface of the heavily-doped wafers of crystal, in a way which ensures that it continues the same crystal structure. This is known as *epitaxial growth*, and the lightly doped layer is quite often called the epitaxial layer.


A single wafer of silicon is used to make hundreds, sometimes thousands, of individual devices. After the sequence of masking, diffusion and ion implantation steps has been used to create the regions forming each device (all made at the same time), the wafer is sliced into individual chips or *dice* using a very thin diamond saw. The dice are then packaged into the final devices — diodes, transistors, integrated circuits (ICs) or whatever.

If you open up a typical device, you'll find that the actual die that forms its active "works" is generally quite tiny — often only a millimetre or two square. Even the largest microprocessor and memory ICs are rarely more than about 10mm square. The rest of most devices is protective package, plus pins to connect it with the outside world.

Next month, we'll look at the simplest semiconductor device: the junction diode.

# OSCILLOSCOPES

## DUAL TRACE 20 MHz

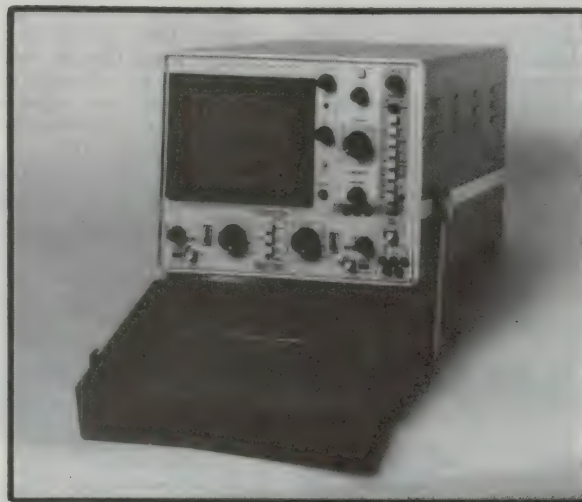

**Model 3132 \$683 (Plus S/T)**

(Includes Two Probes)

- \* 2mV/div calibrated sensitivity \* 5" CRT
- on both channels
- \* DC — 20 MHz Bandwidth
- \* X-Y Operation
- \* Algebraic Addition and Subtraction
- \* 40 ns/div to 0.2s/div timebase
- \* 14 Trigger Functions
- \* Triggering to 40 MHz
- \* 2 Modulation
- \* 10 × Div Display
- \* Component Comparator
- \* DC Source Triple Output




**SCIENTIFIC DEVICES AUSTRALIA PTY. LTD.**

MELBOURNE  
SYDNEY  
ADELAIDE

(03) 579 3622  
(02) 958 8064  
(08) 255 6575

## FUNDAMENTALS OF SOLID STATE

Inside this book you'll find a wealth of basic information on the theory and operation of semiconductors — diodes, transistors, thyristors, FETs and integrated circuits. It's for anyone who wants to know that little bit more about solid state devices and the way they work.



plus \$1.00  
post and handling

Send your order to:  
Freepost No.4  
Federal Publishing Book Sales,  
PO Box 227  
Waterloo NSW 2017








# Know your Test Instruments

BASIC PRINCIPLES OF THEIR OPERATION AND USE

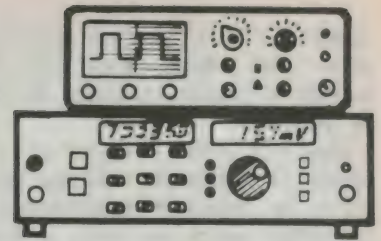

## 1 — The Oscilloscope

The oscilloscope is one of the most useful and versatile instruments in modern electronics. It is essential to almost any practical work in electronics and it is therefore important to have a clear idea of how it works.

by PAUL GRAD

The oscilloscope provides a means of "looking" at what is happening to the voltages and currents in a circuit. Also called *cathode ray oscilloscope*, *CRO* or simply *scope*, it displays, on a fluorescent screen, a clear, "frozen" image of a voltage waveform between any two points of a circuit.

The image is displayed as a graph of voltage plotted against time. This can be any of the many types of waveform which appear in modern electronics, such as sinusoidal, square, or sawtooth waves. Besides being able to see the waveform, the user can read off the display much useful information, including voltage levels, the changes that may take place in them and the time rate of these changes.

Fig.1 shows the basic idea: the voltage is plotted in the vertical or "Y" direction, while the horizontal or "X" direction is a plot of time in either seconds, milliseconds, microseconds or even nanoseconds or picoseconds.

The basic principle of operation of an oscilloscope is fairly simple. An electron gun produces a fine stream of electrons aimed at a fluorescent screen. The gun has a heated cathode which is the source of the electrons, and which is similar to the cathode in a normal thermionic valve. The cathode, heated by a current passing through it, emits electrons into the space around it. These are attracted toward a positively charged anode, passing through a hole into the rest of the gun assembly. The gun also has a system of cylindrical and disc electrodes to control and guide the electrons into a narrow beam.

A pair of parallel, flat and horizontal plates, just ahead of the gun, are effectively connected to the two points of the circuit under test. The voltage variation between the two points in the circuit to be examined is therefore replicated between these plates, which causes the electrons to be deflected vertically, either up or down from their

path, before hitting the screen.

Because of their effect on the electrons, these plates are called vertical deflection plates.

Another pair of parallel, flat but vertical plates, is connected to a time-base generator which applies a sawtooth sweeping voltage horizontally across the path of the electrons. This voltage increases linearly to a certain maximum value, then drops abruptly back to its initial value and starts another cycle. Its effect is to spread the up and down motion of the electron beam, produced by the circuit voltage. This sweeping frequency is adjustable over a wide range, by controls in the timebase generator circuit.

These plates are called the horizontal deflection plates. In older scopes they used to be placed ahead, but in modern scopes they are placed after the vertical deflection plates, to give the electron stream maximum susceptibility to the Y deflection.

Without the action of the deflecting plates the electron beam from the gun would strike the centre of the screen and cause only a small bright dot to be visible there.


If only the vertical deflection plates were in action the electrons would produce only a vertical line on the screen, which could be steady or intermittent, depending on the frequency of the circuit voltage under test.

Conversely, if only the horizontal deflection plates were active only a continuous horizontal line would appear on the screen.

Naturally, if the circuit voltage under test is too high the electrons will be deflected right into the glass neck of the tube and nothing will be visible on the screen.

The height of the wave pattern on the screen allows the user to measure the amount by which a voltage under test is changing. The time it takes for a change to take place can similarly be determined from a knowledge of the time period of the sweeping timebase waveform.

Most oscilloscopes have an amplifier

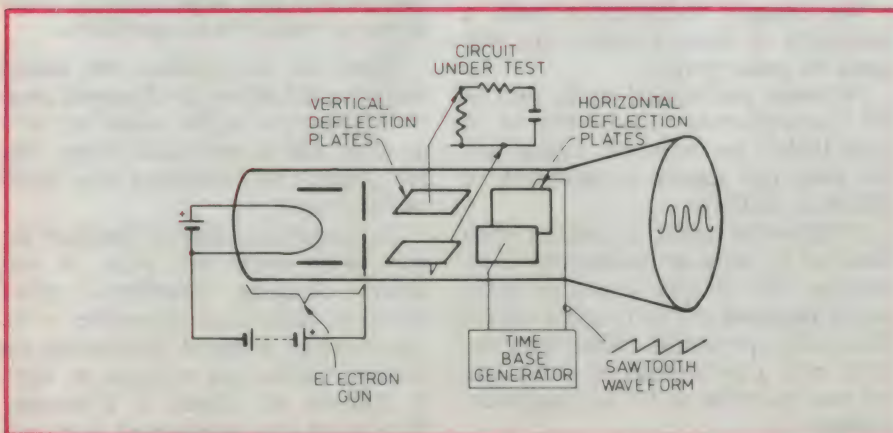

The diagram shows the main elements of a typical oscilloscope.



called the "Y" or "vertical" amplifier to allow small voltages to be made large enough to produce a visible deflection on the screen.

Most also include "trigger" or "sync" circuits to enable the timebase generator to be locked or synchronised with the voltage under inspection, so that the screen pattern is held steady.

As a measuring instrument the oscilloscope distinguishes itself mainly in that it is necessary to adjust and balance various controls to enable an accurate representation of the voltage waveform to be examined.

For example, the voltage under test produces a signal in the oscilloscope which has to be adjusted through two completely separate channels, one the amplifier for the Y plane and the other the triggering and timebase for the X plane.

Modern oscilloscopes are often extremely versatile and may indeed be too sophisticated for their intended use, for which a simpler and cheaper instrument may suffice.

It would be a good idea to read carefully the instruction manual of an oscilloscope before buying or using it.

One of the scope's crucial parameters is its bandwidth, which is the frequency range of voltages to be tested over which the scope can respond with accuracy and clarity.

Both the amplifier for the test voltage in the Y direction and the triggering mechanism of the time base generator in the X direction, must be fast enough to cope with the frequencies of the voltages to be measured.

Besides, for each scope type there is a minimum value of the amplitude of test voltage for which accurate displays can be obtained.

The test voltage goes through a circuit including an amplifier to ensure that the deflection of the electron beam on the screen is large enough for easy and accurate reading of the display.

The actual value of the test voltage amplitude can be deduced from the position to which it was necessary to turn the adjusting attenuator knob to obtain the desired deflection.

A scope is designed so that maximum deflection of the display — allowing best reading accuracy — occurs for a range of test frequencies, provided the test voltage amplitude is large enough.

As the test frequency increases, there comes a point beyond which no adjustment succeeds in achieving maximum deflection of the electron beam on the display screen. It is, of course, possible



***This is a 20MHz oscilloscope, suitable for professional work such as TV troubleshooting. (Courtesy of Dick Smith Electronics)***



***This 6.5MHz scope is of the cheaper kind. It is suitable for audio work. (Courtesy of Dick Smith Electronics).***

to continue using the scope for higher frequencies, at less than maximum deflection and therefore less than the maximum reading accuracy achievable with it, but up to a point.

For any given test voltage amplitude the limit of a scope's usefulness is reached, by definition, at the frequency for which the amplitude of the displayed signal has fallen to 0.707 of the value of the maximum deflection on the screen (a 3dB reduction). That frequency is, by definition, the oscilloscope's bandwidth.

The bandwidth is also the main parameter determining the price of an oscilloscope.

The cheaper oscilloscopes, with a bandwidth of about 6.5MHz, are adequate for audio work.

For more professional work, such as TV troubleshooting, bandwidths of at least 15MHz are required. Digital and RF work can require a bandwidth of 50MHz to 100MHz.

An important aspect to consider when choosing or using an oscilloscope is insulation. The cheaper scopes are often poorly insulated and their casing usually affords little protection. When using the scope near a transformer or power line the user could be in for an unpleasant surprise.

Modern-day scopes originated from

the cruder but similar devices used by a number of researchers at the turn of the century to study the discharge of electricity through gases. It was with such a device that J.J.Thompson in England first obtained an accurate value for the ratio between the charge and the mass of an electron.

Modern TV tubes work on similar principles to those of an oscilloscope but use magnetic deflection, instead of the electrostatic deflection used in oscilloscopes, which would not suit the much larger voltages needed for a TV tube.

A number of refinements have been incorporated into some modern oscilloscopes to extend their capabilities.



There are, for instance, the storage scopes, which allow the displayed image to be preserved on the screen for up to an hour, and in some cases longer. This also permits superimposing two images on the screen.

To record and display transient signals which occur only once, or very slowly changing waveforms, which would be difficult or impossible to display directly, a digital oscilloscope can be used. In this type of scope the signal is digitised and stored in a memory, from which it is reconverted to an analog signal and displayed on the screen. E



\_\_\_\_\_



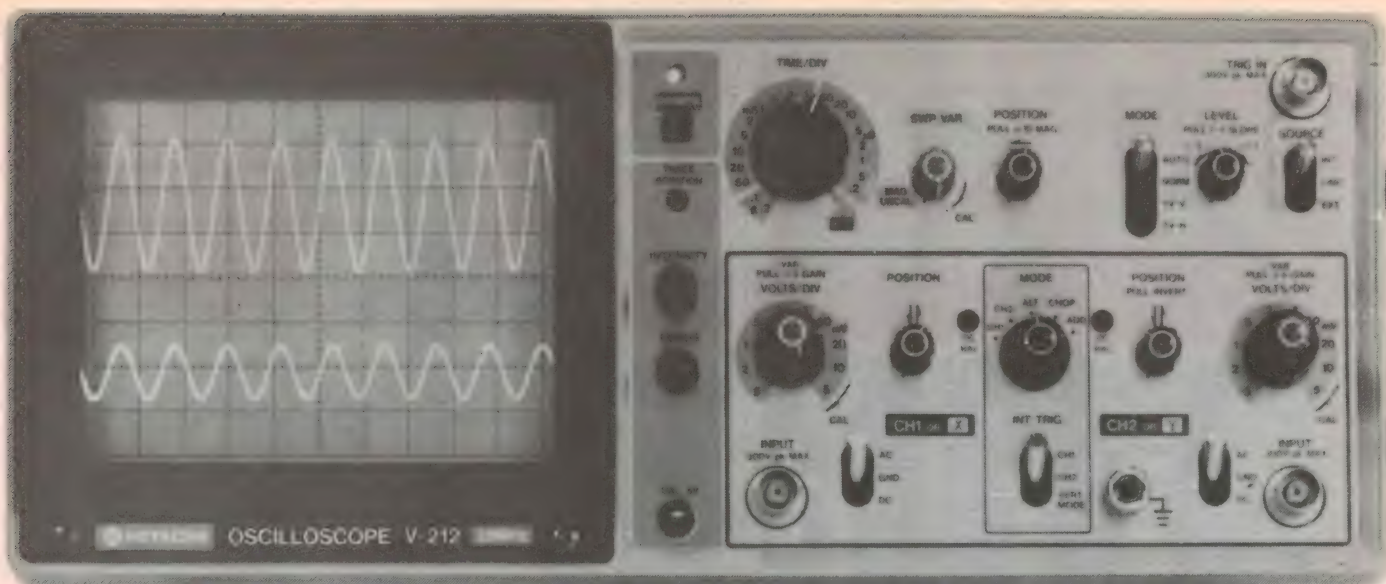

# HITACHI

## 20MHz/1mV

### \$830

Ex Sales Tax  
\$996 inc tax



*Wouldn't you pay a bit more for features like this?*

- ☐ Quality Hitachi engineering
- ☐ Two year Warranty
- ☐ Includes two quality Hitachi probes
- ☐ Tough all metal case and front panel
- ☐ Ideal for servicemen - small footprint and light weight (310x370x130mm 6kg)
- ☐ Extensive triggering facilities including TV sync and vertical mode for steady traces when input frequencies differ widely
- ☐ Free 55 page operating manual with circuit diagram

**Order now. Call**

**Sydney** (02) 648 5455 32 Parramatta Rd, Lidcombe 2141  
**Fax** (02) 647 1545 Telex AA24949 P.O.Box 14 Lidcombe 2141  
**Melbourne** (03) 480 0111 72-74 Chifley Drive, Preston 3072  
**Adelaide** (08) 354 0588 **Brisbane** (07) 277 4422  
**Perth** (09) 325 9333



## Bell Test & Measurement

The measure of quality

A Division of Bell-IRH Ltd (inc in N.S.W.)  
 Prices subject to change without notice

*So good we give the full Spec!*

Display CRT Graticule	6-inch rectangular. Internal, 8 x 10 div (1 div = 1 cm). Horizontal and vertical center lines further marked in 0.2 div increments, marking for measurement of rise time										
Accelerating Potential	2 kV.										
External Intensity Modulation	Voltage: 5V or more. Effective bandwidth: DC to 2 MHz. Max. input voltage: 30V (DC + AC peak).										
Vertical Deflection Sensitivity	5mV/div to 5V/div in 10 calibrated steps $\pm 3\%$ . 1mV/div, 2mV/div $\pm 5\%$ when using x5 magnifier. Uncalibrated continuous control between steps 1 : < 2.5.										
Bandwidth	DC to 20 MHz ( $-3$ dB).										
Rise Time	DC to 7 MHz ( $-3$ dB) when using x5 magnifier. 17.5 ns.										
MAX. Input Voltage	300V (DC + AC peak) or 500Vp-p AC at 1 kHz.										
Input Coupling	AC, GND, DC.										
Input Impedance	1M $\Omega$ approx. 25 pF.										
Display Mode	CH1, CH2 (normal or invert), ALT, CHOP, ADD										
CH1 Vertical Signal Output	Voltage: approx. 20mV/div into 50 $\Omega$ . Bandwidth: 50 Hz to 5 MHz ( $-3$ dB) into 50 $\Omega$ .										
X-Y Operation	CH1: X-axis. CH2: Y-axis.										
Sensitivity	5mV/div to 5V/div.										
Bandwidth	1mV/div, 2mV/div when using x5 magnifier.										
Phase Difference	DC to 500 kHz ( $-3$ dB). 3° or less from DC to 50 kHz.										
Horizontal Deflection	0.2 $\mu$ s/div to 0.2s/div in 19 calibrated steps $\pm 3\%$ .										
Sweep Time Range	100 ns $\pm 5\%$ when using x10 magnifier (20 ns and 50 ns uncalibrated). Uncalibrated continuous control between steps 1 : < 2.5.										
Trigger	Automatic (sweep runs in absence of a triggering signal and for signal below 30 Hz). Normal (sweep runs when triggered), TV-V, TV-H.										
Trigger Mode	CH1, CH2, V-MODE, External, Line.										
Trigger Source											
Trigger Sensitivity	<table border="1"> <thead> <tr> <th></th><th>20Hz to 2MHz</th><th>2MHz to 20MHz</th></tr> </thead> <tbody> <tr> <td>CH1 and CH2</td><td>0.5 div</td><td>1.5 div</td></tr> <tr> <td>External</td><td>20mV</td><td>800mV</td></tr> </tbody> </table>			20Hz to 2MHz	2MHz to 20MHz	CH1 and CH2	0.5 div	1.5 div	External	20mV	800mV
	20Hz to 2MHz	2MHz to 20MHz									
CH1 and CH2	0.5 div	1.5 div									
External	20mV	800mV									
Trigger Coupling	AC.										
Trigger Slope	+ or -										
Calibrator	Square wave. Voltage: 0.5V $\pm 3\%$ . Frequency: Approx. 1kHz.										
Power Supply	Voltage : 100/120/220/240 V $\pm 10\%$ . Frequency : 50/60/400 Hz. Power consumption : approx. 30 W.										
Ambient Temperature	Rated range of use: +10 to 35°C. Limits of operation: 0 to 50°C. Storage and transport: -20 to 70°C.										
Dimensions	310(W) x 130(H) x 370(D) mm. 12.2 x 5.1 x 14.6 in.										
Weight	Approx. 6 kg/13.2 lb.										
MTBF	20,000 hours for target value.										
Accessories Supplied	Two AT-10AJ1.5 probes, Fuse, Power cable, Operation manual.										



# The TELE-LINK Direct Connect Modem Pt.2

*Here is the conclusion to our modem project. Some hints are presented on operation of the modem, in addition to the all-important PCB and front-panel artwork.*

by MARK CHEESEMAN

## Using the Tele-Link


To use the modem the first thing to do is to disconnect the telephone from the wall socket, and plug the phone into the socket on the rear panel of the modem. Then plug the modem into the wall socket, making sure the line switch is in the 'phone' position.

Now select the baud rate which you wish to use. If you are dialling up a bulletin board, you would normally select the "originate" position of the baud rate switch. If the bulletin board uses 1200/75 baud (for example Viatel), then select the '1200RX' position.

After dialling the desired number,

wait until you hear the carrier of the remote modem — this sounds like a single audio tone. When you hear this, flip the phone/modem switch to modem and hang up the handset of the telephone. Wait for the 'carrier detect' LED to light before attempting to communicate. This should occur within a second or two of switching the modem on line.

If the LED doesn't come on soon after that, you should check that the baud rate switch is in the correct position. Note that if the modem at the other end is capable of selecting from many baud rates automatically (auto-bauding) then it will probably take longer than this unless the baud rate

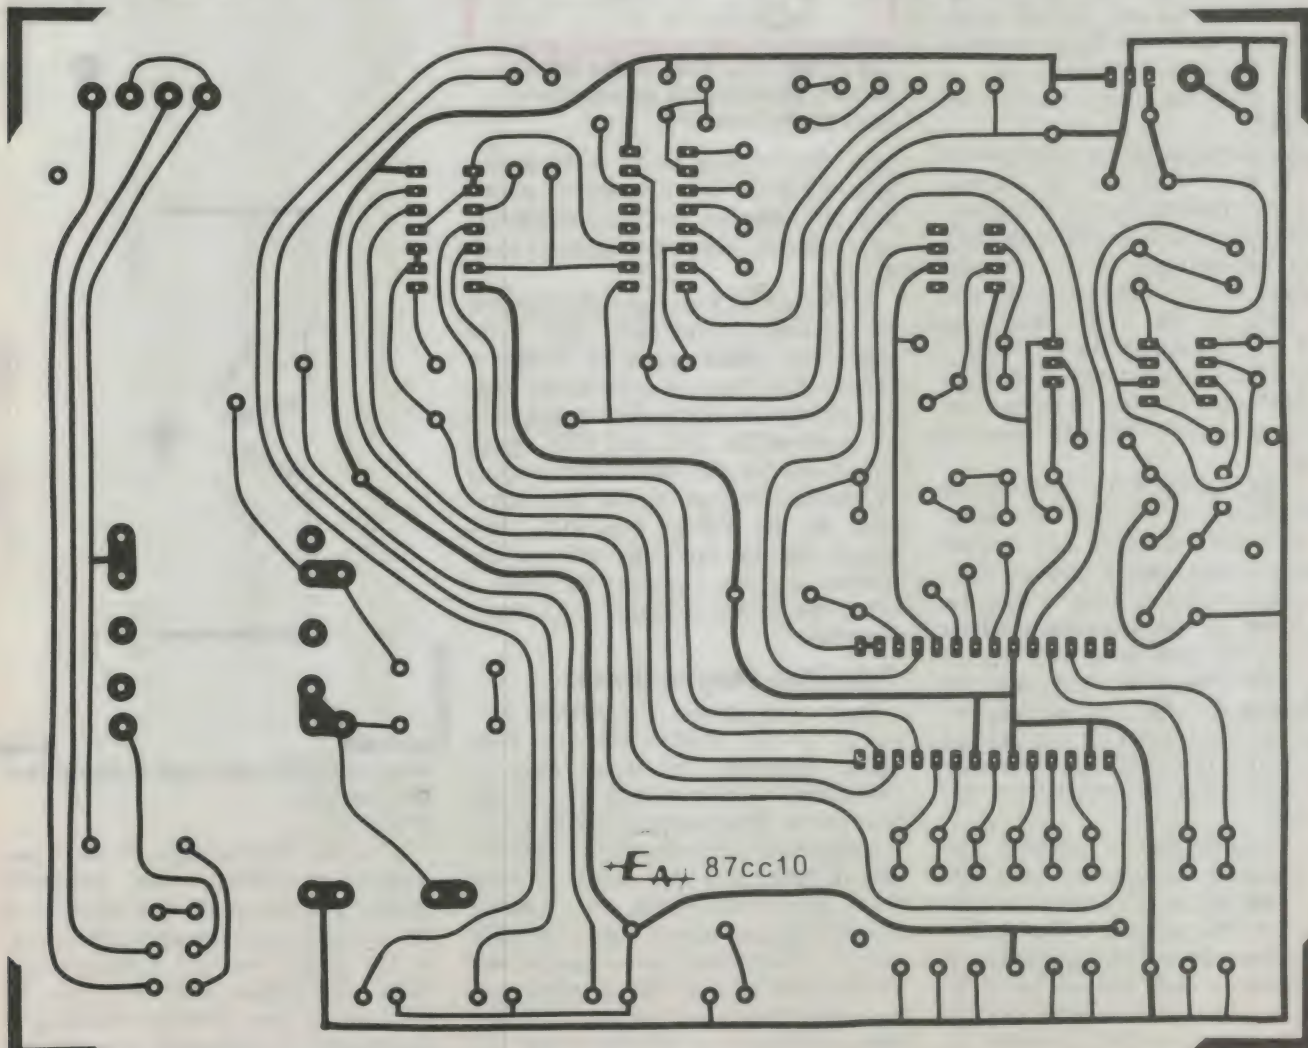

Here is a full size reproduction of the PCB layout.






which you are using is the first one which the other modem tries. When the DCD LED finally lights, press the return key a few times until something intelligent (such as the 'login' message of the remote computer) appears on the screen.

If you are using the modem to communicate with a friend, then set up the two modems so that one is on the originate position and the other is set to answer. Similarly, to use 1200/75 baud, the modem which will be transmitting most of the data should be set to '1200TX' while the other modem is set to '1200RX'.

For packet radio, tie the 'test' pad on the PCB to +5V to put the transmit and receive tones on the same frequency. This is permissible in this application because packet radio is only half-duplex. Since the Bell frequencies are normally used on the VHF bands, the Bell/CCITT pad should also be tied low to select the correct tones. The baud rate switch may be used as before, depending on which bands you intend to operate.

Note that the Am7910 is probably not a good choice for 300 baud HF operation, as it does not have any outputs suitable for connecting a tuning indicator, and it is rather difficult to tune the signal in by ear. However this is of no importance for 1200 baud VHF operation as the operation here involves AFSK using FM rigs, and the frequencies fed to the modem do not depend on the tuning of the receiver, but only on the accuracy of the modulator at the other end.

The Tele-link uses a minimal RS-232C interface, meaning that no handshaking lines are connected between the modem and the computer. This is due to constraints imposed by the number of level translators built into the MAX232 chip. However, a carrier detect (DCD) line is presented to the computer to allow it to determine that, at the very

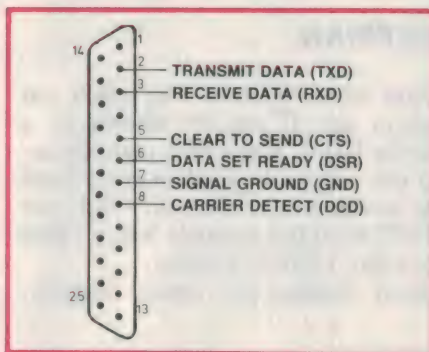

**The solder-side view of the DB-25 socket, showing the connections used in the Tele-Link.**

least, data is going to get as far as another modem. This assumes of course that the computer (or the communications software which it is running) reads this line.

DTR and RTS (signals which enable the modem) are internally tied to the active state, which causes the modem to believe that there is a computer connected any time that power is applied to the modem. The DSR and CTS signals (which indicate that the modem is ready to transfer data) are tied to their active state at the DB-25 connector. This means that the computer will see the modem as ready whenever the latter is connected to the computer, and power is applied.

### Telecom Regulations

Before any device is electrically connected to the Public Switched Telephone Network, the device must be submitted to Telecom Australia for authorisation. The modem presented here is designed to meet all relevant Telecom specifications. For this device to meet these specifications, the line isolation transformer and power supply plugpack must be Telecom approved models such as the ones used in the prototype. In particular they must comply with the relevant clauses of AS C126 and AS C100, and carry a Telecom authorisation.

TELE-LINK



PHONE

MODEM


DCD

RxD

TxD

POWER

BAUD RATE



**The actual size front-panel layout for the modem.**

It is the responsibility of each constructor to submit their completed modem to Telecom for authorisation, as the connection of unauthorized devices to the public switched telephone network is an offence under the Telecommunications act. Telecom Australia is empowered to disconnect unauthorised devices from the phone system.



# OPEN FOR BUSINESS:

Monday to Friday 8.30 am to 5.00 pm.  
Saturday Morning 8.30 am to NOON.

# A.C.E.

RADIO

## ELECTRONICS CENTRE

ESTABLISHED OVER THIRTY YEARS

10B/3 Kenneth Road, Manly Vale 2093

FAX: (02) 451 4170

Phone: (02) 949 4871

### ETONE SPEAKER SPECIALS

38 cm (15 inch) WOOFERS

Model	Size	Cone Type	V/Coil	Reson Hz	Freq Hz	Watts Rms	Price Ea or	2 for
4180	38cm	Hi-Fi	8 or 15 Ohms	30	30-3500	100	\$104.50 or	\$205.00
4310	38cm	Straight surround	8 or 15 Ohms	45	40-6000	60	\$108.00 or	\$212.00
4510	38cm	Straight surround	8 or 15 Ohms	45	40-6000	100	\$150.00 or	\$294.00
4350	38cm	Hi-Fi	8 or 15 Ohms	30	30-4000	120	\$127.00 or	\$251.00

Pack and Post for 1 speaker NSW/VIC \$8.75; Q/T \$13.50; NT/WA \$17.50; SA \$11.50  
Pack and Post for 2 speakers NSW/VIC \$15.00; Q/T \$23.00; NT/WA \$30.00; SA \$20.00

### ETONE 50 WATT RMS

#### A PAIR FOR \$60.95 OR \$34.95 EACH

- RUGGED TOP QUALITY HI-FI WOOFER 30cm 8 ohms
- 90 DAYS FACTORY WARRANTY • FOAM POLY SURROUND
  - STURDY SUSPENSION FOR RICH REPRODUCTION • 3.5cm VOICE COIL • FERRITE MAGNET • FREQ. RESPONSE . . . 35-4500Hz

P & P for 1 Speaker NSW \$4.80 VIC \$5.20 TAS \$6.25 WA/NT \$7.95 QLD/SA \$5.80  
P & P for 2 Speaker NSW \$5.50 VIC \$7.20 TAS \$9.95 WA/NT \$11.45 QLD/SA \$8.20

### POLYPROPYLENE CONE TOP QUALITY HI-FI WOOFERS

80hm Voice Coil — Foam Poly Surround —  
Sturdy Suspension — Fitted Moulded Gasket —  
Ferrite Magnet — 90 days factory warranty

Model	Size	Reson. Hz	Resp. Hz	Watts R.M.S.	Price Ea or	2 For
12 POL 12"	25	30-4000	80	\$47.50	\$89.00	
10 POL 10"	30	35-4000	80	\$42.95	\$79.95	
8 POL 8"	35	40-5000	50	\$36.95	\$68.95	

P & P for 1 Speaker NSW \$4.80 VIC \$5.20 TAS \$6.25 WA/NT \$7.95 QLD/SA \$5.80  
P & P for 2 Speaker NSW \$5.50 VIC \$7.20 TAS \$9.95 WA/NT \$11.45 QLD/SA \$8.20  
5" Polypropylene Mid-Range Speaker to suit above Woofers P.O.A.

### NEW FOR '87 CONVENIENT DISKETTE FILES \$18

Includes Lock + 2 keys

#### Features

- Capacity: 50 pcs 3-1/2" diskette
- High impact plastic lid and base
- Easy access handle for opening and carrying



**\$16 each**

P & P \$2.00

#### Features

- Double row display filling systems
- Protective racks for diskette separation
- Smoked PS plastic cover with lock
- High impact plastic lid and base
- Easy access handle for opening and carrying
- One hundred disk capacity 5-1/4" disk

★ UNBELIEVABLE ★



### SPECIAL

**2N3055**

**10 for \$13**

P & P \$2.00

### 3 WAY CROSSOVERS

200 Watts RMS  
Crossover Freq. 1KC and 5 KC  
12db/Octave

**\$34.95** P & P \$2.00



### COMPONENTS

Computer Keyboard Switches  
1" for \$2.00 P & P \$1.50

New PC Boards (no components)  
New PC Boards (components mounted)  
AS PER JULY ADVERT. P & P \$2.00

### ★ KONICA SPECIAL ★

Floppy Disks Single Sided  
3 1/2 MF/1DD \$52.50/Pk of 10

**\$52.50**  
**Pk of 10**

P and P \$2.00

### TOP QUALITY JAPANESE 5.25" MINI FLOPPY DISKS

"DUE TO PRICE WE CAN'T MENTION BRAND"

SUPER VALUE PACK OF 10 DISKS

**\$18.00 Pk**


P & P \$2.00

### KEYBOARDS

P & P \$5.00


**86 KEY QWERTY**

"Pre Loved" \$35.00 ea




**94 KEY QWERTY**

"Pre Loved" \$40.00 ea.



**109 KEY QWERTY "NEW"**

"Low Profile" \$55.00 ea.



### Video Modulator UM1233



P & P \$2.00


**RS data.**

#### Features:

- Good modulation linearity
- Pretuned to channel 36
- Low RF radiation
- Low current drain
- 750HM output from a standard phono socket
- Suitable for PCB mounting
- Data sheet available

**\$5**

## IBM\* TURBO AT COMPATIBLE

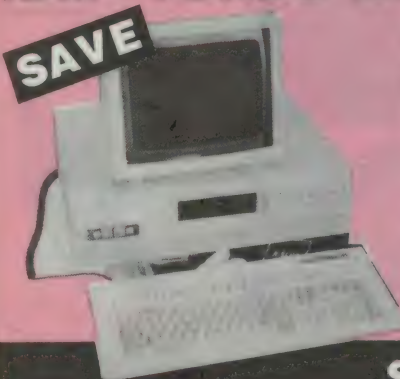

### PC/AT PERSONAL COMPUTER

AT Mainboard with 640K RAM 10 MHz  
EGA card.  
WDC HDD/FDD Control card.  
1 x 1.2MB Floppy Disk Drive  
1 x 20MB Hard Disk Drive  
84 Key AT/XT Keyboard case  
Manual

14" EGA MONITOR

**\$3,299**

## Graphic Printer CENTRONICS 8" TRACTOR FEED



LIMITED STOCK **\$149**

**SAVE**

**SAVE**

**GREAT VALUE**

WE STOCK A RANGE OF I.D.C. CONNECTORS

GATES "D" CELL BATTERIES

\$4.25 ea. P & P \$2.00

★ ★ ★ THIS MONTH'S SPECIALS ★ ★ ★

**FOR POSTAL INSURANCE ADD:** \$2.00 for parcel up to \$200.00 value plus  
\$1.00 for each additional \$100.00 value



# SERIES 5000

## INDIVIDUAL COMPONENTS TO MAKE UP A SUPERB HI-FI SYSTEM!

By directly importing and a more technically orientated organisation, ROD IRVING ELECTRONICS can bring you these products at lower prices than their competitors. Enjoy the many other advantages of RIE Series 5000 kits such as "Superb Finish" front panels at no extra cost, top quality components supplied throughout. Over 1,500 sold!

For those who haven't the time and want a quality hi-fi, we also sell the Series 5000 kits assembled and tested.



### POWER AMPLIFIER

WHY YOU SHOULD BUY A "ROD IRVING ELECTRONICS" SERIES 5000 POWER AMPLIFIER

• 1% Metal Film resistors  
**SPECIAL, ONLY \$399**  
**SAVE \$50**


Developed by ROD IRVING ELECTRONICS and is being supplied to other kit suppliers.

**SPECIFICATIONS:** 150 W RMS into 4 ohms (per channel)  
**POWER AMPLIFIER:** 100W RMS into 8 ohms (+/- 55V Supply)  
**FREQUENCY RESPONSE:** 8Hz to 20kHz  $\pm 0.4$  dB 2 Hz to 65kHz  $\pm 0.3$  dB. NOTE: These figures are determined solely by passive filters.

**INPUT SENSITIVITY:** 1 V RMS for 100W output  
**HUM:** 100 dB below full output (flat)  
**NOISE:** 116 dB below full output (flat, 20kHz bandwidth)  
**2nd HARMONIC DISTORTION:** -0.001% at 1 kHz (0.0007% on Prototypes) at 100W output using a -55V SUPPLY rated at 4A continuous -0.0003% for all frequencies less than 10kHz and all powers below clipping.

**TOTAL HARMONIC DISTORTION:** Determined by 2nd Harmonic Distortion (see above)  
**INTERMODULATION DISTORTION:** 0.003% at 100W. (50Hz and 7kHz mixed 4:1)  
**STABILITY:** Unconditional

Cat. K44771 ..... \$449  
**Assembled and tested \$599**  
packing and post \$10



### PREAMPLIFIER

THE ADVANTAGES OF BUYING A "ROD IRVING ELECTRONICS" SERIES 5000 PREAMPLIFIER

• 1% Metal Film resistors  
**SPECIAL, ONLY \$359**  
**SAVE \$40**

Save that dollar for commercial unit available that sounds as

**SPECIFICATIONS:**  
**FREQUENCY RESPONSE:** High-level input: 15Hz - 130kHz,  $\pm 0.1$  dB  
Low-Level input-conforms to RIAA equalisation  $\pm 0.2$  dB  
**DISTORTION:** 1kHz -0.003% on all inputs (limit of resolution on measuring equipment due to noise limitation)  
**S/N NOISE:** High-Level input, master full, with respect to 300mV input signal at full output (1.2V)  $\pm 92$  dB flat - 100dB A-weighted, MM input, master full, with respect to full output (1.2V) at 5 mV input 500Hz source resistance connected -86dB flat  $\pm 92$  dB A-weighted MC input, master full, with respect to full output (1.2V) and 200V input signal -71dB flat -75dB A-weighted.

Cat. K44791 ..... \$399  
**Assembled and tested \$699**  
packing and postage \$10



### THIRD OCTAVE GRAPHIC EQUALIZER

**SPECIFICATIONS:**  
**BANDS:** 2R Bands

**SPECIAL, ONLY \$209**  
**SAVE \$30**

Cat. K44590 ..... 1 unit: \$239  
..... 2 units: \$429  
packing and postage \$10




### SERIES 4000 SPEAKERS

8 Speakers ..... only \$549  
8 Speakers with Crossovers ..... \$795  
Speaker Cabinet Kit (complete) ..... \$395  
(Please specify cabinet to suit 7" or 8" mid range woofer)  
Crossover Kits ..... \$295  
Complete kit of parts (speakers, crossovers, screws, innerband boxes) ..... \$1,095  
Assembled, tested and ready to hook up to your system ..... \$1,295  
(Approximately 4 weeks delivery)

Errors and Omissions Excepted

### PARABOLIC MICROPHONE

Build a low cost parabola, along with a high gain headphone amplifier to help when listening to those natural activities such as babbling brooks, singing birds or perhaps even more sinister noises. The current cost of components for this project is around \$15 including sales tax, but not the cost of batteries or headphones. (EA Nov '83) 83MA11  
Cat. K83110 ..... \$14.95



### 1W AUDIO AMPLIFIER

A low-cost general-purpose, 1 watt audio amplifier, suitable for increasing your computers audio level, etc. (EA Nov '84)

Cat. .... \$9.95



### EA AM STEREO DECODER

AM stereo is now broadcast in Australia on an experimental basis. This add-on decoder works with the Motorola C-QUAM system (EA Oct '84) 84MS10  
Cat. K84100 ..... \$26.95



### PLAYMASTER 300 WATT AMPLIFIER

This module will deliver up to 200 watts into an 8 ohm load and up to 300 watts into a 4 ohm load. Comprehensive protection is included and a printer circuit board brings it all together in a rugged easy-to-build module. It can be built in either fully-complementary or quasi-complementary versions, so output transistor shortages should be no problem at all. (80PA6) (EA July '80)

Cat. K80060 ..... Normally \$109  
**SPECIAL, ONLY \$99**  
(Heatsink not included)

### SERIES 4000 STEREO PREAMP

This high performance project is designed to complement ETI's 50 watt low distortion amplifier module and forms part of a complete stereo system, the "Series 4000" project. (ETI 471) (Top Projects Vol. 6)  
Cat. K44710 ..... \$59.95

### GENERAL PURPOSE PREAMPLIFIER

A general purpose stereo preamplifier using a single LM382 IC which can be tailored for use with magnetic pickups, tape recorders or microphones by changing a few components. (ETI 445) (ETI July '76)  
Cat. K44490 ..... \$9.95

### OP AMP TESTER

The Op Amp Tester which could save you hours in agonising whether that old op amp that's been sitting in the draw for the last year (ETI April '85, ETI 183)  
Cat. K41830 ..... Normally \$26.50  
**SPECIAL, \$21.50**

### 150W MOSFET POWER AMPLIFIER

Here's a high power, general purpose 150W Mosfet Power Amp Module! Suitable for guitar and P.A. applications and employing rugged, reliable Mosfets in the output stage (ETI 499) (ETI March '82)  
Cat. K44990 ..... \$97.50  
(Heatsink not included)  
plus transformer ..... \$49.50



### SUPERB VIFA/EA 60+60 SPEAKER KIT!

The Vifa/EA 60+60 loudspeaker kit has been designed to completely outperform any similarly priced speakers. This is a 2-way design incorporating drivers which give a deeper, more natural bass response and 19mm soft-dome ferro fluid cooled tweeters which provide clear, uncoloured sound reproduction.

These Vifa drivers are identical to the ones used in such fine speakers as Mission, Rogers, Bang & Olufsen, Monitor Audio and Haybrook just to name a few. Some of which cost well over \$1,000 a pair!

The dividing network is of the highest quality and produce no inherent sound characteristics of their own; they simply act as passive devices which accurately distribute the frequency range between both drivers in each speaker.

The fully enclosed acoustic suspension cabinets are easily assembled. All you need are normal household tools and a couple of hours and you've built yourself the finest pair of speakers in their class!

### D19 TWEETER SPECIFICATIONS:

**Nominal Impedance:** 8 ohms  
**Frequency Range:** 2.5 - 20kHz  
**Free Air Resonance:** 1.700Hz  
**Sensitivity 1W at 1m:** 89dB  
**Nominal Power:** 80 Watts (to 5,000Hz, 12dB/oct)  
**Voice Coil Resistance:** 19mm  
**Voice Coil Resistance:** 6.2 ohms  
**Moving Mass:** 0.2 grams  
**Weight:** 0.28kg  
Cat. C10301 ..... \$38

### C20 WOOFER SPECIFICATIONS:

**Nominal Impedance:** 8 ohms  
**Frequency Range:** 35 - 6,000Hz  
**Resonance Frequency:** 39Hz  
**Sensitivity 1W at 1m:** 90dB  
**Nominal Power:** 50 Watts (12dB/oct)  
**Voice Coil Diameter:** 25mm  
**Voice Coil Resistance:** 5.5 ohms  
**Moving Mass:** 15 grams  
Cat. C10322 ..... \$89

Cat. K86092 (speakers only) \$379  
Cat. K86091 (complete kit) ..... \$449



### MIDRANGE HORNS

Use these quality, all metal, Piezo tweeters for great top end sound in your band speakers, disco sound system, etc. Rated at 30 watts RMS, in a system they will handle over 100 watts RMS.

Two sizes to choose from:  
**Size:** 4" x 10 1/2"  
**Impedance:** 8 ohms  
**Rating:** 30 watts RMS  
**Response:** 1.5kHz - 14 kHz  
**Dimensions:** 102 x 267 x 177mm  
Cat. C92082 ..... Normally \$49.95  
This month only \$39.95


**Size:** 3" x 7"  
**Impedance:** 8 ohms  
**Rating:** 30 watts RMS  
**Response:** 2kHz - 15 kHz  
**Dimensions:** 76 x 177 x 145mm  
Cat. C92084 ..... Normally \$29.95  
This month only \$24.95

Dealers, OEM's, etc., phone (03) 543 2166 for wholesale prices



**50 W AMPLIFIER MODULE (ETI 480)**  
Cat. K44800 ..... \$31.80  
(Heatsink optional extra)

**100 W AMPLIFIER MODULE (ETI 480)**  
Cat. K44801 ..... \$34.80  
(Heatsink optional extra)



### OMNI-DIRECTIONAL WIRELESS MICROPHONE

**Tunable:** 92 - 104MHz  
**Freq. Response:** 50 - 15kHz  
**Range:** Over 300 feet in open field.  
**Modulation:** FM  
**Power Source:** 9V Battery  
**Type:** Electret Condenser  
**Dimensions:** 185 x 27 x 38mm  
**Weight:** 160 grams  
Cat. A10450 ..... \$19.95



### 2 1/4" MINI SPEAKERS (57mm)

Cat.No. 1-9 10+  
C10610 \$1.95 \$1.75



### SUPER HORN

• Wide dispersion tweeter, handles up to 100W  
• Sensitivity: 105dB/0.5m  
• Frequency Response: 3kHz-30kHz  
• Impedance: 8 OHMS  
• Size: 145x54mm  
Cat. C12103 ..... Normally \$12.95  
**SPECIAL, ONLY \$9.95**



### SUPER HORN TWEETER

• Requires no crossover and handles up to 100W!  
• Sensitivity: 100dB/0.5m  
• Frequency Response: 3kHz-30kHz  
• Impedance: 8 OHMS  
• Size: 96mm diameter  
Cat. C12102 ..... Normally \$12.95  
**SPECIAL, ONLY \$9.95**



### CRYSTAL LOCKED WIRELESS MICROPHONE AND RECEIVER


**MICROPHONE SPECIFICATIONS:**  
**Transmitting Frequency:** 37.1MHz  
**Transmitting System:** crystal oscillation  
**Microphone:** Electret condenser  
**Power Supply:** 9V battery  
**Range:** 300 feet in open field  
**Dimensions:** 185 x 27 x 38mm  
**Weight:** 160 grams  
**RECEIVER SPECIFICATIONS:**  
**Receiving Freq:** 37.1MHz  
**Output Level:** 30mV (maximum)  
**Receiving System:** Super heterodyne crystal oscillation  
**Power Supply:** 9V Battery or 9V DC power adapter  
**Volume control**  
**Tuning LED**  
**Dimensions:** 115 x 32 x 44mm  
**Weight:** 220 grams  
Cat. A10452 ..... R.R.P. \$113  
**Our price, \$99**

Description	Cat.No.	Price
AD01610TB (C12030)	AD01610TB	\$24.95
AD02180SQ8 (C12040)	AD02180SQ8	\$24.95
AD080652W8 (C12042)	AD080652W8	\$24.95
AD070620M8 (C12045)	AD070620M8	\$24.95
AD12250W8 (C12050)	AD12250W8	\$29.00



### PIEZO DIRECT RADIATING TWEETER

Requires no crossover, handles up to 100 watts  
**Sensitivity:** 98dB  
**Maximum input:** 24 volts  
**Freq. Response:** 3.2 - 30kHz  
**Dimensions:** 95mm diameter  
Cat. C12104 ..... \$11.95



### COMPACT DISC STORAGE UNITS

• Holds 10/20 compact discs in their cases  
• Interlocking modular design allows vertical and horizontal interlocking  
• Discs slide into place horizontally making titles easy to read  
• Wall mount or free standing  
A10031 (10 discs) \$12.95  
A10032 (20 discs) \$19.95



### ROTATING LIGHT

Motor driven rotating reflecting mirror with a flash rate of about 150 per minute. Large lens fit right to base, making unit weatherproof. Spare globe included.

**SPECIFICATIONS:**  
• Available in Blue or Orange  
• 150 Revolutions per minute. (approximately)  
• Shock absorbing rubber mounting legs  
• Connecting wire fitted through base  
• 12V DC 750mA  
• Base diameter: 102mm  
• Height: 140mm  
A15042 Blue .... \$42.95  
A15043 Orange... \$42.95



### CRYSTAL LOCKED WIRELESS MICROPHONE AND RECEIVER

**MICROPHONE SPECIFICATIONS:**  
**Transmitting Frequency:** 37.1MHz  
**Transmitting System:** crystal oscillation  
**Microphone:** Electret condenser  
**Power Supply:** 9V battery  
**Range:** 300 feet in open field  
**Dimensions:** 185 x 27 x 38mm  
**Weight:** 160 grams  
**RECEIVER SPECIFICATIONS:**  
**Receiving Freq:** 37.1MHz  
**Output Level:** 30mV (maximum)  
**Receiving System:** Super heterodyne crystal oscillation  
**Power Supply:** 9V Battery or 9V DC power adapter  
**Volume control**  
**Tuning LED**  
**Dimensions:** 115 x 32 x 44mm  
**Weight:** 220 grams  
Cat. A10452 ..... R.R.P. \$113  
**Our price, \$99**



### WIRELESS MICROPHONE RECEIVER WA100

Made by Piezo (Azden) of Japan, this device will turn any microphone fitted with a Cannon Type male socket into a wireless microphone. The receiver will plug into any 6.35mm microphone input. Both transmitter and receiver can be tuned from 76 - 81MHz.  
**Freq. Response:** 50 - 16kHz  
**Tunable:** 76 - 81MHz  
**Field Strength:**  
Transmitter 10uV/100 metres  
Receiver 15mV (100%)  
**Battery:** Transmitter LR44 (1.5V)  
Receiver 3 x UM4 (4.5V)  
Instructions: Japanese (English not available)  
Cat. A10520 ..... R.R.P. \$199  
**Our price, only \$189**



# Low Price Electronics

## No.1 for semiconductor products!

MELBOURNE 48 A'Beckett Street, Phone (03) 663 6151. NORTHCOE 425 High Street, Phone (03) 489 8866.  
MAILORDER HOTLINE: (03) 543 7877

4000	75	74145	1.45	74F373	4.84	74LS248	1.40	74S12/24212	
4001	75	74150	1.90	74F374	3.95	74LS249	1.50	74S24/28/212	
4002	75	74155	2.78	74F380	2.78	74LS251	1.50		
4003	75	74155	2.50	74F381	4.22	74LS252	1.35		
4004	1.55	74155	2.50	74F382	4.22	74LS253	1.35		
4005	1.55	74155	2.50	74F383	4.22	74LS254	1.35		
4006	1.55	74155	2.50	74F384	4.22	74LS255	1.35		
4007	1.55	74155	2.50	74F385	4.22	74LS256	1.35		
4008	1.70	74155	2.50	74F386	4.22	74LS257	1.35		
4009	1.70	74155	2.50	74F387	4.22	74LS258	1.35		
4010	1.70	74155	2.50	74F388	4.22	74LS259	1.35		
4011	1.70	74155	2.50	74F389	4.22	74LS260	1.35		
4012	1.70	74155	2.50	74F390	4.22	74LS261	1.35		
4013	1.70	74155	2.50	74F391	4.22	74LS262	1.35		
4014	1.70	74155	2.50	74F392	4.22	74LS263	1.35		
4015	1.70	74155	2.50	74F393	4.22	74LS264	1.35		
4016	1.70	74155	2.50	74F394	4.22	74LS265	1.35		
4017	1.70	74155	2.50	74F395	4.22	74LS266	1.35		
4018	1.70	74155	2.50	74F396	4.22	74LS267	1.35		
4019	1.70	74155	2.50	74F397	4.22	74LS268	1.35		
4020	1.70	74155	2.50	74F398	4.22	74LS269	1.35		
4021	1.70	74155	2.50	74F399	4.22	74LS270	1.35		
4022	1.70	74155	2.50	74F400	4.22	74LS271	1.35		
4023	1.70	74155	2.50	74F401	4.22	74LS272	1.35		
4024	1.70	74155	2.50	74F402	4.22	74LS273	1.35		
4025	1.70	74155	2.50	74F403	4.22	74LS274	1.35		
4026	1.70	74155	2.50	74F404	4.22	74LS275	1.35		
4027	1.70	74155	2.50	74F405	4.22	74LS276	1.35		
4028	1.70	74155	2.50	74F406	4.22	74LS277	1.35		
4029	1.70	74155	2.50	74F407	4.22	74LS278	1.35		
4030	1.70	74155	2.50	74F408	4.22	74LS279	1.35		
4031	1.70	74155	2.50	74F409	4.22	74LS280	1.35		
4032	1.70	74155	2.50	74F410	4.22	74LS281	1.35		
4033	1.70	74155	2.50	74F411	4.22	74LS282	1.35		
4034	1.70	74155	2.50	74F412	4.22	74LS283	1.35		
4035	1.70	74155	2.50	74F413	4.22	74LS284	1.35		
4036	1.70	74155	2.50	74F414	4.22	74LS285	1.35		
4037	1.70	74155	2.50	74F415	4.22	74LS286	1.35		
4038	1.70	74155	2.50	74F416	4.22	74LS287	1.35		
4039	1.70	74155	2.50	74F417	4.22	74LS288	1.35		
4040	1.70	74155	2.50	74F418	4.22	74LS289	1.35		
4041	1.70	74155	2.50	74F419	4.22	74LS290	1.35		
4042	1.70	74155	2.50	74F420	4.22	74LS291	1.35		
4043	1.70	74155	2.50	74F421	4.22	74LS292	1.35		
4044	1.70	74155	2.50	74F422	4.22	74LS293	1.35		
4045	1.70	74155	2.50	74F423	4.22	74LS294	1.35		
4046	1.70	74155	2.50	74F424	4.22	74LS295	1.35		
4047	1.70	74155	2.50	74F425	4.22	74LS296	1.35		
4048	1.70	74155	2.50	74F426	4.22	74LS297	1.35		
4049	1.70	74155	2.50	74F427	4.22	74LS298	1.35		
4050	1.70	74155	2.50	74F428	4.22	74LS299	1.35		
4051	1.70	74155	2.50	74F429	4.22	74LS300	1.35		
4052	1.70	74155	2.50	74F430	4.22	74LS301	1.35		
4053	1.70	74155	2.50	74F431	4.22	74LS302	1.35		
4054	1.70	74155	2.50	74F432	4.22	74LS303	1.35		
4055	1.70	74155	2.50	74F433	4.22	74LS304	1.35		
4056	1.70	74155	2.50	74F434	4.22	74LS305	1.35		
4057	1.70	74155	2.50	74F435	4.22	74LS306	1.35		
4058	1.70	74155	2.50	74F436	4.22	74LS307	1.35		
4059	1.70	74155	2.50	74F437	4.22	74LS308	1.35		
4060	1.70	74155	2.50	74F438	4.22	74LS309	1.35		
4061	1.70	74155	2.50	74F439	4.22	74LS310	1.35		
4062	1.70	74155	2.50	74F440	4.22	74LS311	1.35		
4063	1.70	74155	2.50	74F441	4.22	74LS312	1.35		
4064	1.70	74155	2.50	74F442	4.22	74LS313	1.35		
4065	1.70	74155	2.50	74F443	4.22	74LS314	1.35		
4066	1.70	74155	2.50	74F444	4.22	74LS315	1.35		
4067	1.70	74155	2.50	74F445	4.22	74LS316	1.35		
4068	1.70	74155	2.50	74F446	4.22	74LS317	1.35		
4069	1.70	74155	2.50	74F447	4.22	74LS318	1.35		
4070	1.70	74155	2.50	74F448	4.22	74LS319	1.35		
4071	1.70	74155	2.50	74F449	4.22	74LS320	1.35		
4072	1.70	74155	2.50	74F450	4.22	74LS321	1.35		
4073	1.70	74155	2.50	74F451	4.22	74LS322	1.35		
4074	1.70	74155	2.50	74F452	4.22	74LS323	1.35		
4075	1.70	74155	2.50	74F453	4.22	74LS324	1.35		
4076	1.70	74155	2.50	74F454	4.22	74LS325	1.35		
4077	1.70	74155	2.50	74F455	4.22	74LS326	1.35		
4078	1.70	74155	2.50	74F456	4.22	74LS327	1.35		
4079	1.70	74155	2.50	74F457	4.22	74LS328	1.35		
4080	1.70	74155	2.50	74F458	4.22	74LS329	1.35		
4081	1.70	74155	2.50	74F459	4.22	74LS330	1.35		
4082	1.70	74155	2.50	74F460	4.22	74LS331	1.35		
4083	1.70	74155	2.50	74F461	4.22	74LS332	1.35		
4084	1.70	74155	2.50	74F462	4.22	74LS333	1.35		
4085	1.70	74155	2.50	74F463	4.22	74LS334	1.35		
4086	1.70	74155	2.50	74F464	4.22	74LS335	1.35		
4087	1.70	74155	2.50	74F465	4.22	74LS336	1.35		
4088	1.70	74155	2.50	74F466	4.22	74LS337	1.35		
4089	1.70	74155	2.50	74F467	4.22	74LS338	1.35		
4090	1.70	74155	2.50	74F468	4.22	74LS339	1.35		
4091	1.70	74155	2.50	74F469	4.22	74LS340	1.35		
4092	1.70	74155	2.50	74F470	4.22	74LS341	1.35		
4093	1.70	74155	2.50	74F471	4.22	74LS342	1.35		
4094	1.70	74155	2.50	74F472	4.22	74LS343	1.35		
4095	1.70	74155	2.50	74F473	4.22	74LS344	1.35		
4096	1.70	74155	2.50	74F474	4.22	74LS345	1.35		
4097	1.70	74155	2.50	74F475	4.22	74LS346	1.35		
4098	1.70	74155	2.50	74F476	4.22	74LS347	1.35		
4099	1.70	74155	2.50	74F477	4.22	74LS348	1.35		
4100	1.70	74155	2.50	74F478	4.22	74LS349	1.35		
4101	1.70	74155	2.50	74F479	4.22	74LS350	1.35		
4102	1.70	74155	2.50	74F480	4.22	74LS351	1.35		
4103	1.70	74155	2.50	74F481	4.22	74LS352	1.35		
4104	1.70	74155	2.50	74F482	4.22	74LS353	1.35		
4105	1.70	74155	2.50	74F483	4.22	74LS354	1.35		
4106	1.70	74155	2.50	74F484	4.22	74LS355	1.35		
4107	1.70	74155	2.50	74F485	4.22	74LS356	1.35		
4108	1.70	74155	2.50	74F486	4.22	74LS357	1.35		
4109	1.70	74155	2.50	74F487	4.22	74LS358	1.35		
4110	1.70	74155	2.50	74F488	4.22	74LS359	1.35		
4111	1.70	74155	2.50	74F489	4.22	74LS360	1.35		
4112	1.70	74155	2.50	74F490	4.22	74LS361	1.35		
4113	1.70	74155	2.50	74F491	4.22	74LS362	1.35		
4114	1.70	74155	2.50	74F492	4.22	74LS363	1.35		
4115	1.70	74155	2.50	74F493	4.22	74LS364	1.35		
4116	1.70	74155	2.50	74F494	4.22	74LS365	1.35		
4117	1.70	74155	2.50	74F495	4.22	74LS366	1.35		
4118	1.70	74155	2.50	74F496	4.22	74LS367	1.35		
4119	1.70	74155	2.50	74F497	4.22	74LS368	1.35		
4120	1.70	74155	2.50	74F498	4.22	74LS369	1.35		
4121	1.70	74155	2.50	74F499	4.22	74LS370	1.35		
4122	1.70	74155	2.50	74F500	4.22	74LS371	1.35		
4123	1.70	74155	2.50	74F501	4.22	74LS372	1.35		
4124	1.70	74155	2.50	74F502	4.22	74LS373	1.35		
4125	1.70	74155	2.50	74F503	4.22	74LS374	1.35		
4126	1.70	74155	2.50	74F504	4.22	74LS375	1.35		
4127	1.70	74155	2.50	74F505	4.22	74LS376	1.35		
4128	1.70	74155	2.50	74F506	4.22	74LS377	1.35		
4129	1.70	74155	2.50	74F507	4.22	74LS378	1.35		
4130	1.70	74155	2.50	74F508	4.22	74LS379	1.35		
4131	1.70	74155	2.50	74F509	4.22	74LS380	1.35		
4132	1.70	74155	2.50	74F510	4.22	74LS381	1.35		
4133	1.70	74155	2.50	74F511	4.22	74LS382	1.35		
4134	1.70	74155	2.50	74F512	4.22	74LS383	1.35		
4135	1.70	7							



## Marine Electronics Feature:

# Electronics Afloat in

*Each year at about this time, EA takes a special look at the benefits electronics can offer for the small and medium boat owner. This year's feature has been prepared with expert guidance and assistance by Jeff Mellefont, associate editor of "Modern Boating" magazine.*

There was a time — and it wasn't all that long ago — when marine electronics gear of any sort of sophistication wasn't really on the agenda for the average boat owner. Several things put them in the too hard — and too expensive — category.

The more modest devices which some of us had contact with, like wind instruments, logs and simple echosounders, weren't always dazzling in their reliability, while the majority of modern electronics we regarded as the domain of commercial mariners and the owners of


very large, very expensive yachts. Radars, single sideband radios, satellite navigators and the like were too bulky, too expensive and too power-hungry to really be considered.

It's the microchip that has changed all that, and it really has been a revolution. It has been responsible for the development of far more compact equipment and it requires very modest electrical supplies. It has made equipment smarter, and at the same time its enormous programme capacity has challenged designers to think up more tasks for

equipment to perform. A classic example of this is the development of sailing computers, by linking together once relatively straightforward wind and boat speed instrumentation.

Part of the picture, too, has been development in display technology, with colour video screens and liquid crystal screens being adapted to displays which incorporate more and more data. Microcircuitry has allowed for simple, touch pad operation.

Along with this has been an increasingly systems approach to electronics,

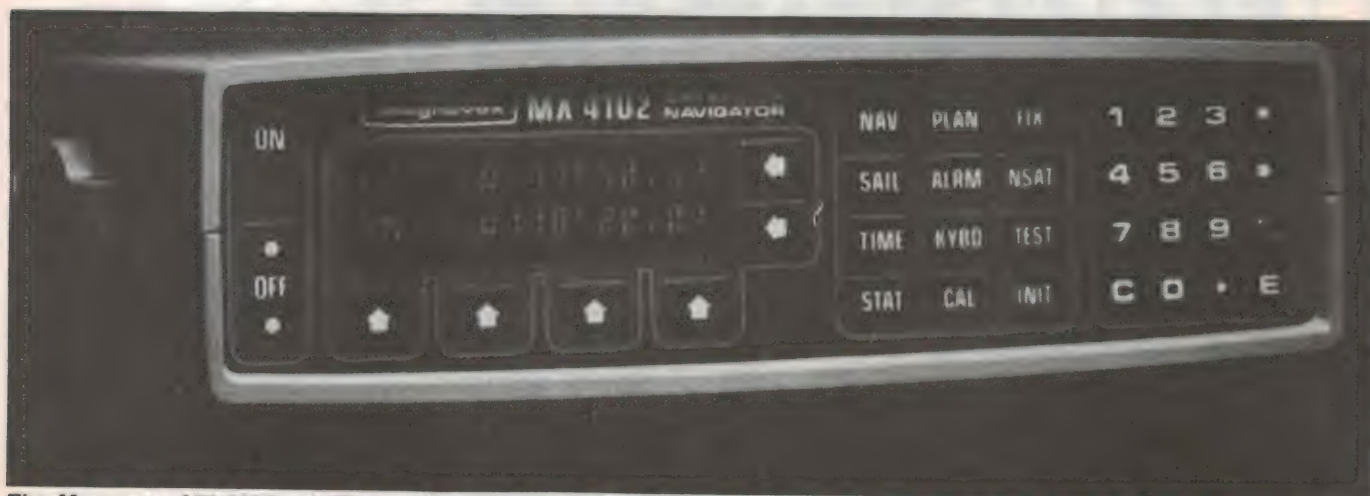

**The Magnavox MX 4102 satellite navigator automatically corrects its calculation for your location each time a satellite passes overhead, and will interface to your gyrocompass and speed log. (Courtesy Coursemaster Autopilots)**



# '87



with separate function modules becoming linked together, or interfaced, in increasingly powerful combinations. Small remote repeater displays allow the main equipment to gather in dry, protected nerve centres on board, sending their data up to the deck for working helmsmen and navigators. At the same time, there do seem to have been advances in weatherproofing modern electronics.

On the following pages we look at the major navigation electronics — radar, satnav, weatherfax, radio direction finding and echosounders. We also examine marine communications — SSB, VHF and the new cellular phones, — as well as electronic instrumentation, autopilots and, on a lighter note, marine hifi systems.

In each section we look at how the equipment has developed over recent years, what it can accomplish and the sort of user features that can be expected. We're not doing comparison testing — there's just too much gear around these days to more than scratch the surface — but we certainly make reference to some of the leading brand name equipment by way of illustration.

As you can see we've also prepared a table showing the main suppliers of the various kinds of marine electronics gear, to serve as a guide to readers who want to get further information.

SUPPLIER	RADAR	WEATHER FAX	RDF	SAT NAV	DEPTH SOUNDERS	TWO-WAY RADIO	EMERGENCY BEACONS	AUTO PILOTS	MARINE HI-FI	INSTRUMENTS	CELLULAR TELEPHONES
<b>ACL Special Instruments</b> 27 Rosella St., East Doncaster Vic. 3109. (03) 842 8822			•	•							
<b>Ansett Technologies</b> 27 Parer Rd., Airport West 3042 (03) 668 1122	•										
<b>AWA Marine</b> 67 Lords Rd., Leichhardt, NSW 2040 (02) 560 8644	•	•	•	•	•	•		•	•	•	
<b>Codan Pty. Ltd.</b> 8 Help St., Chatswood 2067 (02) 419 2397						•					
<b>Coursemaster Autopilots</b> 7 Smith St., Chatswood, NSW 2067. (02) 417 7097				•				•			
<b>GME</b> 6 Frank St., Gladesville, NSW 2067. (02) 816 2933	•				•	•	•		•		
<b>Peter Green Ship Chandlers</b> 12 Polo Av., Mona Vale, NSW 2103. (02) 417 7097			•	•	•					•	
<b>Honeywell Marine Services</b> 4/10 Pitt Myaree, WA 6154. (09) 330 7559	•	•	•	•	•	•		•			
<b>Icom</b> 7 Duke St., Windsor, Vic 3181. (03) 51 2284						•					
<b>Imark</b> 167 Roden St., West Melbourne, Vic 3003 (03) 329 5433					•	•					
<b>Macson Trading Co.</b> 44 Alexander Parade, Clifton Hill 3068 (03) 419 2397					•						
<b>Magna-Tech Marine</b> 7-9 George Pl., Artarmon, NSW 2064. (02) 427 0666					•						
<b>Marine Naval Systems</b> 100 Elliott St., Balmain, NSW. (02) 810 7711							•				
<b>Mayfair Wholesale</b> 170 Logan Rd., Buranda, Qld. 4102. (07) 52 8016					•						
<b>Mee Too Industries</b> 1 Thew Pde., Dee Why, NSW 2099. (02) 997 5411		•									
<b>Meridian Survey Services</b> PO Box 1264, Booragoon, WA 6154. (09) 330-2402										•	
<b>Mitsubishi Electric</b> 73 Epping Rd., North Ryde, NSW 2113 (02) 888 5777											•
<b>Mobilelectronics Holdings</b> 4 Collins St., Wahroonga, NSW 2067 (02) 487 2684											•
<b>Nautilic</b> 45 Rocky Pt Rd., Kogarah, NSW 2217 (02) 587 7288	•										
<b>NEC</b> 99 Nicholson St., St. Leonards 2065 (02) 438-4033											•
<b>Novatel (Air Internat. Gp)</b> 437 Williamstown Road, Port Melbourne 3207											•
<b>Olbis Industries</b> 1717 Ipswich Rd., Rocklea, Qld 4106. (07) 379 1087					•	•					
<b>Plastimo</b> 160 Epping Rd., Lane Cove, NSW 2066 (02) 428 9111								•		•	
<b>Quin's of Port Adelaide</b> Box 384 GPO Pt Adelaide, SA 5015. (08) 47 1277	•	•			•	•		•		•	
<b>Racal Marine</b> 115B Ferras St., Sth Melbourne, Vic. (03) 699 2133						•					•
<b>C.H. Smith Marine</b> 16 Langridge St., Collingwood, Vic 3066 (03) 417 1077	•	•		•	•						
<b>Dick Smith Electronics</b> PO Box 321, North Ryde, NSW 2113. (02) 888 3200						•					
<b>Solo Marine</b> 11 Green St., Revesby, NSW 2212. (02) 774 5255								•			
<b>Tandy Electronics</b> 91 Kurrajong Ave., Mt. Druitt 2770 (02) 675 1222						•					
<b>Taylor Marine</b> PO Box 192, Fremantle, WA 6160. (09) 335 3291	•	•		•	•			•			
<b>Tickles Discount Marine</b> 125 Wellington St., Brisbane, Qld 4169 (07) 391 5788						•					
<b>Trymax Marine</b> 280 Tingal Rd., Wynnum, Qld 4178. (07) 396-7245	•										
<b>VDO Instruments</b> PO Box 51, Heidelberg, Vic 3081. (03) 450 3209											•
<b>Wagner Industries</b> 483 Princes Hwy, Sydenham, NSW 2044 (02) 519-6387						•					



## **Marine Electronics Feature:**

# **Navigation, radar, weather fax & sounders**

*Whether you're using a boat for business or pleasure, it's very important to be able to work out exactly where you are, what else is there with you and what the weather is doing. Here's where modern electronics has a great deal to offer, even for the small boat owner.*

**by JEFF MELLEFONT**

First of all, let's have a look at the low-cost approach to navigation equipment — radio direction finders or "RDFs".

Costing less than a quarter the price of an average satnav, a radio direction finder is the frequently overlooked, low-tech electronic navigation device. There are reasons for their relative unpopularity along our coasts, not the least of which is the scarcity of marine beacons. However, RDF is by no means limited to use with special marine beacons; the aerobeacons at any commercial airstrip close to the coast may be used, as indeed can coastal AM commercial radio station signals.

Unlike satnav, which provides a precise fix, RDF gives only a line of position (LOP) by determining the bearing of a radio source. This is done by rotating a directional antenna. RDF can be subject to inaccuracies due to distance from the signal, on-board interference or geographical deviations of the signal — an intervening landmass can distort the result. As the accuracy of the bearing tends to increase as the source is approached RDF can be an excellent means of homing in on a beacon — like the one on Lord Howe island — providing there are no intervening hazards like reefs. If two suitably placed beacons are within range, a fix can be obtained from the intersection of the two LOPs.

RDFs range from simple handheld units with built in bearing compass and earphones, to listen for the "null" in the signal which indicates the unit is pointing at the signal source — like the popular British Seafix 2000 which covers

beacons in the 200 to 420kHz range. At the other end of the scale are larger digital units like Fujion's AD8000E which covers beacons, AM broadcasting in the 535 to 1604kHz band, 1600 to 3900kHz marine band and FM from 88

to 108MHz, with manual and automatic DF.

Brookes and Gatehouse has a handheld compass and earphone equipped DF aerial attachment which turns its Homer V radio receiver unit into an RDF. The Heron DF aerial can then be used to source any of the appropriate coastal radio stations.

A new twist on the RDF game is Raytheon offshoot Apelco's AXL 1500 ADF which is dedicated to direction finding VHF transmission, including Class C EPIRBs (Emergency Position Indicating Radio Beacons). Previously VHF and HF direction finding required expensive equipment and was limited to



**Tracor's Global Navigation System combines satellite navigation with Omega, to provide the benefits of both. (Courtesy ACL Special Instruments)**



search and rescue organisations.

Attached to the VHF set on board, the AXL 1500's LCD and azimuth dials give relative and true bearings in analog and digital formats. This opens up DF navigation, with every VHF-carrying vessel a potential radio beacon for you to track — provided they are sure of their own position!

## Satnav and Omega

More accurate than RDF, but also more expensive are satellite navigation systems, or "Satnavs". The use of satellites for navigation was pioneered by the military, and for quite a while satnav gear was only of interest to navies and commercial shipping lines because of its high cost, bulk, power consumption and complexity. However in the last few years this has all changed, thanks to developments in solid state and digital electronics. Now you can buy an easy to use satnav receiver for less than \$3000, bringing the technology well within the budget of many small boat owners.

The original satnav system, called Transit, is based on a set of nine satellites which circle the earth every 107 minutes in orbits which pass over the poles. Each satellite continuously transmits information regarding its position and orbit, at an internationally reserved frequency of 400MHz in the UHF band. By tracking the signals using a special antenna and receiver — computer combination, it is possible to fix your position typically to within 1/3rd of a nautical mile, and often much more accurately again. However this can only be done during each satellite "pass", so at worst this can be at intervals of 107 minutes or so.

Virtually all of the satnav equipment currently available for small and medium boats uses the Transit system, but a newer and more accurate system again is scheduled to replace Transit by around the mid 1990s. Known as the Global Positioning System, or GPS, this is currently very much more expensive than Transit and only of interest to large shipping lines and the military. GPS offers the ability to fix your position to within less than a metre, and every 6.5 seconds.

The latest satnav receivers are virtually fully automatic, thanks to their built-in microcomputers. In use you simply key in your speed and heading at any time, and the satnav will indicate your position in latitude and longitude. Each time a satellite passes overhead, the satnav automatically updates its calculations; in between passes it updates

by dead reckoning using your speed and heading inputs, or those fed to it by your gyrocompass and speed log.

For example the Magnavox MX 4102 satnav from Coursemaster Autopilots has inputs for connection to compass and speed log, and also an NMEA 0183 interface which allows it to connect to a wide variety of other electronics including Loran C, autopilots, a GPS receiver and a personal computer.

The satnav can also guide you in following a planned route. Many modern units allow you to key in waypoint information for the planned route, and will then automatically provide heading indication on route to take you from one waypoint to the next.

If you have an autopilot, the satnav can be hooked up to this, to automatically maintain the desired course/route.

Another feature of modern satnavs is the ability to automatically power down into a low-drain standby mode after each satellite pass, and only "wake up" just before the next pass in order to carry out a reading. This can conserve battery power on long cruises. Needless to say they will also wake up when you wish to fix your current position; the information from the last satellite pass and your compass/log are automatically retained in memory even in the standby mode.

Tracor's Transtar satnav unit, available from ACL Special Instruments, draws only 3 watts when operating in its "sleep" mode. The same unit will accept storage of route information for up to 15 waypoints.

Tracor is now also able to provide low cost receivers for the worldwide Omega VLF (very low frequency) navigation system, as used by large shipping lines and submarines. Two receivers are available, the Omega navigator and the Automatic Omega II. Both again feature an inbuilt microcomputer, and automatically process signals from the three nearest Omega stations to display directly in latitude and longitude. No charts, tables or calculations are required, and the readings are updated every every minute. Positional accuracy is between 1 and 2 nautical miles during the day, and 2-4 nautical miles at night. The simpler Omega Navigator unit sells for around \$6000, and the more powerful and flexible Automatic Omega II for \$25,000.

The latest thing is to combine a satnav with an Omega navigation receiver, so the Omega system can be used to boost the accuracy of the satnav between satellite passes. This gives a system with the absolute accuracy of sat-

nav, coupled with the short-term stability and frequent updating of Omega — the best of both worlds! Tracor offers the Global Navigation System, which combines its Bridgestar satnav and Omega Navigator, and costs around \$12,000. Further details are available from ACL Special Instruments.

## Radars

A number of major changes in radar technology in the last few years has resulted in more compact sets capable of being installed on quite small pleasure craft. Radars need no longer be considered solely the domain of large luxury yachts, with base prices of the simpler units not much more than an ordinary satnav, and in some cases less.

At the same time, some of the more advanced small craft radar are offering a wealth of navigational data owing to changes in screen technology and the ability to interface with other on-board navigation electronics, making the radar screen a true working navigation station.

The traditional PPI — plan position indicator — cathode ray tube screen, with the revolving scan line illuminating targets which when faded between sweeps, required a hood for daylight viewing. Daylight viewing was more a possibility when colour displays were developed, digitally superimposing colours on the screen according to different levels of target reflectivity.

The new raster scan display has improved screen resolution and reduced power drain, as well as offering direct daylight viewing. The raster scan, like TV, develops its picture in horizontal lines and provides a constant image of targets.

At the same time, the "front end" or scanner has developed, largely through the use of microcircuitry, and become more compact. No longer are the radio waves generated in a box on board and sent by conduit to the transmitter; now it all happens in the radome unit itself. Sensitivity has increased, allowing greater range without increasing power demands. Five years ago 3kW got you about 15 miles range; today the same power can reach out to 30 miles.

Increasingly featured on the compact sets, like Raytheon's 16-mile 1603 model from Honeywell Marine are variable range marker (VRM) rings which with electronic bearing lines (EBL) allow accurate range and relative bearing readouts of selected targets.

In sets capable of interface with a fluxgate compass target bearings can be read out as true. Such bearings are





**Advantages of the GME-Goldstar GS-951 turbo marine radar include 24nm range (5kW) and daylight viewing display. (Courtesy Greenwich Marine)**

amongst the increasing amount of data which now appear as on-screen graphics and alpha-numeric displays. By manipulating the VRM and EBL functions, alarm zones of various widths can be created, either in a continuous band around the vessel or covering partial sectors.

GME — Goldstar has recently released a family of radars with models offering ranges of 16, 24 and 32 nautical

miles, and prices from \$3600 for the 3kW/16nm model GS930. All models feature a raster scan display, while the more powerful models offer VRMs and EBLs.

Colour is again on the agenda with the latest bright screen radar units, allowing the operator to apply different colours to the various range marker rings, heading lines, bearing lines and alarm zones. Some sets, like Koden's

MDC 400 (Quins of Port Adelaide) have a plot function which preserves targets' previous positions, giving a graphic target track.

The adoption by some companies of liquid crystal screen displays, as on JRC's JMA-2010 (C.H. Smith Marine) and Apelco's LDR 9900 (Honeywell Marine) has further shrunk the below-decks hardware to a size which could be accommodated by virtually any navigation station.

These 8-mile sets can be hard to read in direct sunlight, for example on a fly-bridge, because of the nature of liquid crystal displays, and their resolution is fairly rudimentary. For example, a buoy and a large fishing boat could appear on the screen as equally sized dots. However, the modest amperage they demand is definitely a plus for power-conscious small craft operators. The JMSA-2010, for example, with its peak power output of only 1kW, consumes a meagre 24W at 12V, or 2 Amps. Mea-only 240 x 182 x 111mm, these mini marvels offer the safety of radar's seeing eye to the smallest boats.

With the arrival of marine electronics standards like the NMEA 0183 specifying a format and protocol for digital information, the potential for linking

## Tracor { Omega Sat Nav Integrated

Omega Benefits : Worldwide. All weather.  
: 60 Sec Update  
: Current Prediction  
: Navigational Accuracy.  
1-2nm.

Sat Nav Benefits : Capable of High  
Accuracy -1nm.  
: Up to 90 Minutes  
Before Update  
: Prediction of Future  
Satellite Passes.

When Tracor Sat Nav and Omega are integrated you get:-

: Fix Data Transfer From Sat : Enhanced Navigational : Total Redundancy — Failure  
Nav to Omega Accuracies. 0.25nm. of either Retains Nav  
Capability.



Only Tracor offer a 2 box integrated approach — Sat Nav + Omega. Stand alone if you wish.



ASSOCIATED CALIBRATION LABORATORIES PTY LTD

27 Rosella Street, East Doncaster Victoria 3109

Telephone (03) 842 8822

Fax (03) 842 5730





**The JRC colour radar JMA-2040, which offers 48nm range with two bearing lines and range markers. (Courtesy C.H. Smith Marine)**

radar with other on-board navigation electronics opens up all sorts of avenues. Radar screens with their real time, real world display of the craft's environment are an ideal place to display other navigational data.

### Weather fax

One piece of gear carried by almost all the competitors in the recent BOC singlehanded race around the world was the weather facsimile printer, or weatherfax. The detailed synopsis and forecast charts which the weatherfax receives and prints out were an essential navigation tool for strategic planning of routes, to dodge the light-air highs and head for the strong winds of the lows.

A worldwide network of some 60 land-based radio facsimile transmitters regularly broadcasts weather charts and other information, including analysis of ocean currents and waves, weather fronts, highs and lows with speed and direction of movement, sea conditions with wave heights, crest time and direc-

tion, polar ice conditions and satellite weather pictures.

In addition, more NAVTEX stations are coming on line, which broadcast notices to mariners, and many modern weatherfax machines can receive these. Australia has two stations on line, transmitting weather information — AXM in Canberra and AXI in Darwin.

While some weatherfax set-ups consist solely of a printer and the signal decoding circuitry required to turn the incoming radio signals into lines of image on the page, relying upon a hookup with an existing on-board radio receiver, most modern systems incorporate a dedicated receiver with facility to store a number of weatherfax frequencies in memory, for rapid access. The frequencies of the transmitting stations are in the ranges 2 to 25MHz and 80 to 160kHz.

The facsimile pictures are built up of horizontally scanned lines which are drawn on electro-sensitive paper as it is fed past the shuttling recording head. Rate of scanning is often variable, be-



**Rapidly becoming popular are weather faxes, like the JAX-2 from Japan Radio Company. It includes a synthesised receiver. (Courtesy C.H. Smith Marine)**

## COMPACT DOUBLE FROM JRC JMA2043/44 RADAR



### Features

- 24/32 NM Range
- Radome or open antenna
- 2VRMS
- 2 EBL's
- Alarm Zone

## JFV90 COLOUR SOUNDER



### Features

- Dual Frequency 50/200KHZ
- 600 watts (RMS) output
- 9 hour Temperature graph
- Sat Nav Interface
- VRM
- Alarm Windows

**C.H.SMITH MARINE**  
16 Langridge Street  
Collingwood, 3066  
PH: (03) 417 1077



tween 60 and 120 lines per minute. It can take some minutes to produce the thousands of lines needed to make up a chart. Two types of paper can be used depending on the machine, one a silvery, aluminised paper which sometimes produces a carbon dust residue, the other a white, heat sensitive paper more familiar to users of office fax machines.

One compact weatherfax suited to smaller craft because of its use of 8 inch printouts (10 inch is common) is the Furuno Model FAX-208A (Taylor Marine). This yields four print tone levels on white thermal paper. Its inbuilt receiver handles all known facsimile frequencies.

AWA's JMC FX-240 MK2 is a slightly larger unit, using 10 inch dry metallic recording paper. Its synthesised general coverage receiver covers 100kHz to 30MHz continuously, on AM, FAX, SSB and CW.

While most weatherfax equipment is imported, Flexible Systems in Hobart is producing the Navimate. This is a Brother printer, modified to convert the incoming fax signals. It needs to be linked to an existing radio receiver. The company successfully applied for protection, resulting in an import duty being applied to the other sets on the market, including those with a built-in receiver. This duty is currently at 28 per cent. In a demonstration the print resolution from the Navimate did not appear to be sufficient to resolve adequately the finer transmitted data, however.


## Depth Sounders

They say it started with a scientist kneeling in the bilges of an iron ship, pounding on the hull with a thumping big hammer and timing the return of the echo with a stopwatch. There are a few flaws in this story, but suffice to say it has been established that soundwaves travel at a nearly constant velocity through water, at 1500m/sec, or about five times faster than they do through air.

To apply this, a depth sounder transducer sends down a pulse of ultrasonic energy somewhere between 25kHz and 200kHz, which is reflected back when it encounters anything of sufficient density such as fish or solid bottom. Oddly enough, a pocket of air will reflect the pulse, which is why turbulent water gives a bad reading. The time taken by the pulse to return is measured and distance calculated.

The lower frequencies suffer less attenuation as they travel through water, and 25 to 50kHz is used where depths of over 1000 metres are to be measured.

The high frequencies produce a narrower beam for a given size of transducer and are used when the best resolution of depth changes or quality of reflection is required. For example, a very soft muddy bottom or weeds cause a fading, weak signal. Depending on the type of display, however, the variability of the returning signal can be recorded as a means of interpreting the nature of the bottom, or the size and density of a school of fish.

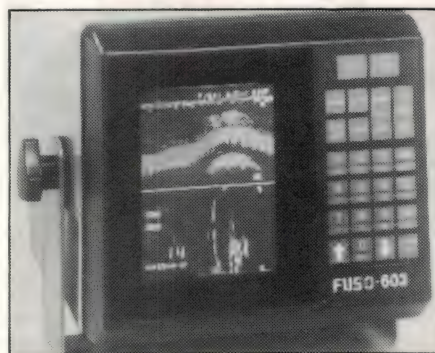

**The Fuso 603 fishfinder uses a colour CRT display and provides digital display of depth and water temperature. (Greenwich Marine)**

All fishfinders are also, of course, echosounders, but not all echosounders are fishfinders. The simplest type of sounder with a digital readout can have the annoying (and sometimes alarming) habit of bouncing back and forth between the bottom and intervening fish, if it doesn't have the circuitry to filter out the unwanted echoes. But at the other end of the scale, a modern colour video unit will graphically show bottom contours and density, and everything from single fish to schools that may be swimming below.

In order to be efficient in transmitting and receiving the pulse, the acoustic window covering the crystal of the transducer is best placed outside the hull, in direct contact with the water, although those who are reluctant to drill holes in their underwater hull can mount the transducer internally. This attenuates the signal, however, and reduces the operating range, but it can still be acceptable for some applications.

The transducer should provide beam angles of 22° or more to provide an effective spread of signals to compensate for heeling or rolling of the hull.

The quite remarkable number of depth sounders on the market reflects the variety of functions required by different boat users, from a plain depth readout to sophisticated bottom analysis, recording and fishfinding. It also reflects the number of different types of

displays now available.

One of the oldest types of display utilises a neon lamp or light-emitting diode (LED) mounting on a rapidly rotating arm, behind a clear circular screen. The transducer transmit pulse lights up the LED as the arm is at the top of the dial, and the returning echo lights it up again as the arm passes the appropriate depth marked around the circumference of the dial. This direct display is still popular and a number of sounder models on the market use it, like the British Seafarer 700 (AWA Marine) which has been around in various models for some time. If depth alarms are fitted, as they are on the Seafarer, they are visually displayed by a different coloured LED lighting up at the programmed guard depths.

Depth alarms are virtually universal, even on the simpler sets, and frequently take the form of a dual alarm allowing the operator to set a "safe" range of depth when anchored, for example. If the vessel drifts into shallower or deeper water, an audible alarm will be triggered.

Digital readout via a liquid crystal display (LCD) offers the most basic "two-dimensional" depth data display, which is nonetheless more than adequate for the purposes of many small craft operators; the compact Fuso Model 30-A (GME) is one such. A simple LCD readout is an economical way to obtain a repeater function, in the cockpit for example, from a more elaborate set which might be among the electronics in a navigation station. Digital need not mean basic, however, models such as the SMR SD6100 (Imark) offer discriminating circuitry to prevent false readings due to surface clutter or other interference, readout in metric or fathoms, depth alarms and signal gain control, readout sunshade and inbuilt backlight for night use.

A colour video display adds the possibility of enhanced bottom analysis, by colour-coding returning signals according to their strength. A set like the Fuso 603 (GME) offers this along with a wealth of alphanumeric data that can be called up and superimposed on the readout image as required, including digital depth and water temperature.

A number of units are offering graphic image display by the alternative LCD screen. While a large LCD screen can give image resolution comparable with video, this style of graphic display lends itself to very compact sets. The Fuso 403 (GME) is an example of this type, offering a resolution of 20,480 pixels. EA



## **Marine Electronics Feature:**

# **Communicating over the water**

*Even when you're out on the water to get away from it all, it's still quite important to be able to make contact when you need to. Thanks to modern electronics, marine communications are getting easier and more reliable all the time.*

**by JEFF MELLEFONT**

Probably the most important development in marine communications in Australia during the last year has been the launching of Telecom's cellular telephone service. This started in Sydney in February and has now begun in Melbourne as well.

Basically cellular phones are portable or mobile radiotelephones which use frequencies in the UHF (ultra-high frequency) band. They're a bit like a combination of a modern push-button electronic phone and a "walkie-talkie" two way radio; you can be called just like a normal phone, and you can dial local, STD and even ISD calls.

The main difference between the new cellular phones and earlier radiotele-

phones is that instead of communicating with a single, centrally located "base station", the new phones are designed to work with a complete network of smaller stations. These are distributed in a grid pattern, with each station servicing its own local area or "cell". The idea is that as the mobile or portable phone moves around, it moves from cell to cell, but always stays in reliable contact with the rest of the telephone system. Switching between the fixed cell stations is done automatically by the equipment.

Telecom's main reason for bringing in the cellular system has been to provide a more efficient and reliable service for cars, but the system has also brought

big benefits for boat owners who spend most of their time in the harbour or nearby coastal waters. In Sydney, it has provided reliable telephone operation over an area extending from Barrenjoey down to Cronulla, and about 30km out to sea.

Many different cellular phone models are now available, from both Telecom itself and suppliers such as Mobiletronics, Novatel, Mitsubishi, Racal and NEC. The models range from tiny hand-held units to much larger fully featured sets intended for building into a car, truck or boat. The fancier models include all of the frills found on "executive" office phones — memories for storing frequently-called numbers, op-



**GME's GX-286 marine handheld transceiver provides 6 channels on 27MHz. (Courtesy Greenwich Marine)**



**The GME GX-552 VHF transceiver provides 25W output on 55 channels. (Courtesy Greenwich Marine)**



tional hands-free operation, inbuilt clock/calendar and so on.

Prices vary from about \$3000 up to around \$5500, but there's also an annual "access fee" of \$600. Both incoming and outgoing calls are charged at the STD prime rate of 40c per minute.

## VHF marine radio

What if you go further afield, beyond the reach of cellular radio phones? Well, one relatively low cost solution is VHF (very high frequency) marine two-way radio.

Marine VHF radio operates in the 156-162MHz range, which covers a standardised international range of marine channels, with various bands to reserved for ship-to-ship, ship-to-shore, pilotage and other specialised functions. In Australia channel 87A is reserved as the yachting frequency on which pleasure craft can communicate without competing with commercial users of the airwaves.

VHF sets operate on a maximum output of 25W, with a 1W range available for close-to transmission, for example within a harbour. Reception is essentially line of sight, except on occasions when atmospheric anomalies make the radio waves skip out further. (Very rarely, a station within a normal range will be unobtainable, while a station hundreds of miles away might respond to your call). Normally, with a good antenna mounted as high as possible (on the masthead in the case of a yacht) ranges of 25 to 50 nautical miles can be expected, and sometimes more where a shore station has its transmitting antenna on high ground.

The most important channel on VHF is the international distress channel 16, which is monitored 24 hours a day by coastal stations and by all commercial shipping. Any craft fitted with VHF, even a small pleasure craft, should monitor channel 16 whenever it is operating, both to join in the safety net that mariners provide each other by listening out for distress calls, and to take advantage of weather and other safety messages which are notified from time to time on this channel (usually with a message to switch to an appropriate channel, channel 67 in Australia, to receive the broadcast). Contact between stations is usually established briefly on 16 before switching to an agreed channel, leaving 16 free for its most important role of safety monitoring.

The Overseas Telecommunications Commission (OTC) operates a growing number of coastal stations around our



**Uniden's MC-724 VHF transceiver provides 90-channel programmable scanning, 25W output. (Courtesy Dick Smith Electronics)**

shores, providing regular weather reports and other information on VHF channel 67, as well as 24 hour monitoring for distress calls. The stations have direct links with Seasafety, the Federal search and rescue co-ordinator in Canberra.

In addition, OTC operates its Seaphone service through these coastal marine stations, enabling vessels to be linked quickly with the national and international telephone services. The primary Seaphone channels, on which contact with the shore station may be made directly, are 26 and 27, depending on the location (e.g., Sydney 26, Newcastle 27), with channel 23 as the secondary channel. All are duplex channels, allocated for radio telephone calls. VHF's use of FM (frequency modulation) ensures high quality, distortion-free reception which makes it suitable for voice transmission and link-up with the telephone system.

Sydney's Seaphone coverage is complicated by the geography of the Pittwater and Hawkesbury region, where reception of VHF in popular boating areas like Refuge Bay was blocked out by the hilly terrain. Now, using a remotely operated installation near Cowan, OTC has extended Seaphone into the Hawkesbury River System. By the use of further stations near Port Stephens and Nowra, continuous coverage of the NSW coast is possible between Tuncurry and Narooma. All other capital cities have an OTC Seaphone station, as well as Townsville, and it is planned to extend continuous coastal coverage from Cairns to Adelaide.

Provided your boat is within range of a coastal station, VHF Seaphone provides a superior radiotelephone service — speed of connection and clarity of re-

ception — than MF or HF, and at a lower cost (now reduced to \$1.30 for a one minute call anywhere in Australia; previously \$3.90 minimum of three minutes; overseas calls at \$1.30 per minute plus operator connected rate to destination).

Now OTC is moving to provide fully automatic, computerised calling services at the Sydney coast station, on a trial basis. The on-board operator will be able to direct dial an onshore telephone number, using a special handset which will plug into the microphone jack. With each call, the calling station will identify itself by a code automatically transmitted, and the shore computer will verify this, place the call, record the tie and charges and bill the operator's account. The modification to existing VHF sets, it is believed, will cost less than \$500. If the system proves viable after trials in Sydney, it will extend to the other OTC shore stations. Its much smaller setting-up costs for a boat owner must certainly make this system a strong competitor to cellular phones, despite Seaphones's greater per-minute costs.

A Seaphone operator must hold the Restricted Radio Operator's Certificate of Proficiency from the Department of Communications, while the transceiver has to conform in the department's specification RB274B or RB275B. At the moment there are some 25 companies (all imports) that have DoC approval for their VHF transceivers.

The features offered by VHF sets are pretty well standardised, with simple squelch controls, volume and broadcast power selection. A common and useful facility on many sets is the "dual watch" which, when selected, automatically cycles the set from whichever channel it



is on back to emergency channel 16 every few seconds. If a signal is detected, channel 16 will be held so the message can be heard.

GME's familiar Electrophone GX552, released last year, provides a standard 55 international marine VHF channels, with pushbutton electronic channel selection (via an inbuilt synthesiser) and instant one-touch selection of channel 16 and AYF channel 87A. The unit has a reversible front panel that allows it to be mounted on a console or from an overhead surface.


VHF transceivers are becoming more compact as a general trend. Icom's little IC-M55 measures only 140mm (5.25 inches) x 50.5mm (1.75 inches) at the display panel, and 163mm (6 inches) deep. It weighs 1.3kg and can be mounted almost anywhere. Despite its small size, it covers 78 international

VHF marine channels, with 10 programmable instant access channels for quick selection of your most frequently used ones. The fully synthesised unit can scan for signals on all of these programmed channels, as well as perform the normal channel 16 dual watch.

Now available are VHF handheld sets for mobile ship stations like tenders, or very small craft without a DC power supply. The SMR Sea Lab 9000, imported by Imark, has a full 78 channels and power of 3 watts and operates from rechargeable nicad batteries with a claimed life of 6-8 hours.

A VHF installation will cost at least twice that of the familiar 27MHz (citizens' band) sets that have been the mainstay of small recreational craft here, but it offers better range, less interference, full 24-hour emergency monitoring and easy access to the tele-

### Emergency radio beacons: exciting new developments

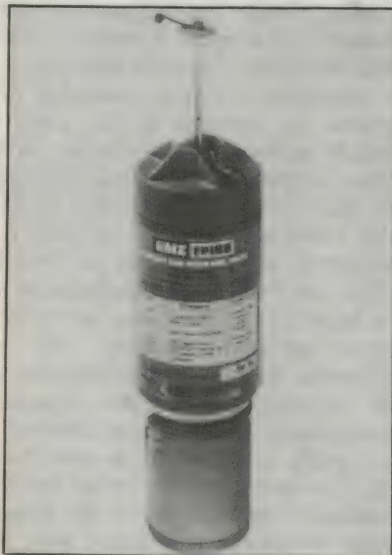

**GME's new upgraded MT248 EPIRB (emergency position indicating radio beacon)**

In the event of a marine emergency, an emergency position indicating radio beacon or "EPIRB" can greatly improve the chances of help arriving. EPIRBs are small self-contained and waterproof transmitters, which transmit a warbling distress signal continuously for a few days, on the 121.5MHz and 243MHz aviation distress frequencies in the VHF band.

Local manufacturer Greenwich Marine Electronics has just released an upgraded EPIRB, the MT248 (shown), which uses lithium batteries and provides a minimum

continuous transmissions of at least 5 days (after an "shelf life" of up to 10 years). The unit has an inbuilt self-test facility, and measures only 326mm long by 80mm in diameter.

The only shortcoming of this type of conventional EPIRB is that if you are well away from popular air routes, the signals may not be picked up or tracked down before the EPIRB's batteries are exhausted. To obviate this problem, French firm SA Informatique Electronique Securite Maritime has announced a new type of EPIRB which transmits on 406MHz as well as 121.5MHz. The higher of these frequencies can be received by a global network of four polar-orbit satellites called SARSAT-COSPAS, which has been set up as a co-operative effort by Canada, France, the USA and the USSR.

The satellites orbit every 100 minutes, and cover virtually everywhere on the earth's surface. So with one of the new EPIRBs, you can be assured that wherever you are, a distress message will be received by the relevant search and rescue authorities within about 3 hours — in the worst case. The satellites use a doppler measurement technique which allows them to place the EPIRB's position on within one square nautical mile. The new EPIRB also generates a digitally coded ID signal, allowing the authorities to fully identify the vessel in distress. Initial price of the new "satellite EPIRB" is around \$2000.



**Australian  
Maritime College**

**Courses in  
Maritime  
Electronics  
and**

**Radiocommunication**

The Australian Maritime College offers Associate Diploma courses in Maritime Electronics and Marine Radiocommunication.

Both are two year, full-time courses. Successful graduates qualify for a wide range of positions in the public and private sector — on shore as engineering assistants, technical officers, design draftsmen and technicians; or at sea as radio officers.

Both diplomas are recognised by the Australian Public Service Board and the Australian Institute of Engineering Associates.

**ENTRY REQUIREMENTS:** HSC or equivalent level passes in mathematics, a science subject and preferably English. Mature age applicants with relevant experience will also be considered.

**FEES:** There are no course fees, other than the \$250 p.a. government fee. The courses are approved under AUSTUDY.

**FACILITIES:** The College is fully equipped with the latest training facilities to provide students with the practical experience and technical knowledge required for their chosen career.

**FOR FURTHER INFORMATION, CONTACT:**

The Admissions Officer  
Australian Maritime College  
PO Box 986

LAUNCESTON, Tas. 7250

or telephone, toll free (008) 03 0277

NJ8480



phone system. Consequently, VHF seems destined to become the standard small boat communications system for boaters around the Australian coastline.

## MF/HF SSB radio

Beyond coastal waters, the 25 to 50 miles within which line-of-sight VHF radio signals keep us in contact with the land, the requirements of ship-to-ship and ship-to-shore communications are met by MF/HF SSB radio. This utilises the medium/high frequency band encompassing two megahertz (MHz) to 24MHz - although basic communication needs on waters around Australia can be met by quite basic sets operating between the 2 to 8MHz bands.

Single side band (SSB) refers to a modulation technique used in propagating radio waves. Transmitting power for SSB marine sets varies from about 90 watts peak for the smaller sets up to the maximum authorised 400 watts peak for top-of-the-line sets.

SSB radio channels occur in a number of configurations which need to be understood. Simplex channels are those on which transmission and receiving occurs on the same frequency. If you try to talk over the other station, the signals interfere and no-one hears anything. Hence the old "blah, blah, over," routine, signalling that one station will remain silent while the other speaks.

A duplex channel employs separate frequencies for transmit and receive, and simultaneous transmission is possible — you can interrupt, contradict, and shout down your caller to your heart's content.

Twin frequency simplex (or semi duplex) channels use duplex frequencies on simplex fittings, with the operator transmitting and receiving on different frequencies. It doesn't allow for simultaneous transmission by both operators but gives a measure of privacy as an eavesdropper can listen to only half of a two-way conversation.

SSB radiotelephone services worldwide have operators at coast stations who will switch a calling ship station into the local or world telephone system. This is known as Radphone. With good radio equipment, and a knowledge of the working frequencies of the various Radphone coast stations like Portishead in England and the High Seas networks on either coast of the USA or Australia's OTC stations in the capital cities, a vessel can make contact from anywhere in the world.

Other ship-to-shore communications facilities exist besides radiotelephone. Seagram is a telegram service for morse

code or voice transmission to or from coast stations over permanent working frequencies, or frequencies that operate the service at designated hours.

A new service called Seatex, introduced last year, is a fully automatic direct dial system for telex transmission to other vessels or any telex subscriber in the world. It requires an onboard communications centre (some systems can utilise a personal computer keyboard and VDU) to compose and edit text, and a special radio transceiver for error-free transmission. This is important to overcome the problems inherent in transmitting digital data over the inter-



**Uniden's MC-610 VHF transceiver provides 25W/1W output and PLL synthesis for 55 channel operation. (Courtesy Dick Smith Electronics)**

ference-prone SSB bands. The data are transmitted in blocks, with the transmitting station waiting between each block to receive confirmation from the receiving station that the preceding block was received correctly . . . all made possible by the advanced computing capabilities of modern microchip circuitry in the hardware. This type of equipment goes well over \$10,000 and is available in Australia from several companies including AWA and Honeywell.

The Radphone frequencies likely to be of more interest to the average yacht SSB station are assigned to designated duplex channels which vary from one coastal station to another, and which are spread across the bands from 2 to 22MHz. SSB radio sets were until fairly recently limited in the numbers of channels they could access. There are 160 approved marine HF voice channels worldwide.

Previously each frequency was generated by a discrete quartz crystal, which was separately installed with its own circuitry and was rather expensive and time consuming to have replaced. The introduction of fully synthesised frequency selection on some modern SSB sets, like Wagner's 1829-S or the Skanti TRP 8250 S — both fully up-to-date,

touchpad control sets — allows for almost unlimited choice of frequencies from a single high accuracy quartz crystal, from which a microprocessor chip can select the required frequencies. This gives literally unlimited access to receive frequencies, while transmitting is only allowed on approved frequencies, by means of electronic gating.

Absolutely essential to efficient HF communications is a properly installed antenna system, with proper grounding. Even making a long section of yacht backstay between two insulators serve as the antenna, it is rarely possible to have it equal the desired length of a quarter-wave at the lowest HF frequencies. A separate antenna tuning unit (ATU) is required to compensate for this, to provide inductive loading to the antenna for low frequencies and capacitive loading for high frequencies.

A manual ATU usually consists of a control on the radio set and a dial; when the station is selected the operator twists the tuner looking for the highest reading. While this happens the set is transmitting a signal, a source of potential interference for other stations.

Automatic ATUs are available which relieve the operator of this task, and usually perform it considerably quicker. Many manufacturers provide this option for their SSB sets, like Icom's M-700 or the Australian Codan's HF4000 series Wagner's 1829S, based on the American SEA unit but to be manufactured here in Australia in due course, not only features automatic tune-up, but programmes the tuned characteristics into its memory, so that the channel is ready-tuned when it is next selected.

Equally as important as antenna tuning is proper grounding of the whole installation, without which the powerful radio waves can play havoc with other on-board electronic circuitry. Fortunately for boat owners, the water itself provides the best earth available, and it should be relatively easy to connect the radio installation, including antenna, ATU and transceiver, with it. This can be done in several ways: via an external metal grounding plate throughbolted to the hull; by connecting up with through-hull fittings, metal tanks, engine blocks and so on. In the case of GRP or wooden vessels, the ground does not need to be in direct contact with the water. For example, a copper mesh laminated into a portion of the hull would make an excellent ground. The various components should be linked up by copper foil, rather than normal round cable, which is a poor conductor at radio frequencies. EA



## **Marine Electronics Feature:**

# **Less drudgery, more enjoyment**

*Thanks to modern electronics, you can now spend a lot less of your time on board doing dreary things like keeping on course and more time relaxing. Listening to music, for example . . .*

**by JEFF MELLEFONT**

An autopilot is the one item of boating equipment that I can think of which very often ends up with a personalised name. There must be hundreds of boats on which the autopilot is affectionately known as "George". This speaks volumes about the usefulness — indeed, the indispensability — of a good autopilot, although it says little about the imagination of all those George-christeners.

Indeed, for all its dullness, its repetitiveness, for the constant effort to correct the course as a boat's bow is endlessly knocked off line in a seaway, no other task on board is as dreary as the steering watch. To be freed from this drudgery is a great benefit for all except offshore racing helmsmen, who specialise in steering the fastest course through any particular sea.

For everyone else a reliable autopilot means more time to attend to other on-board tasks or simply to relax and enjoy life on the water. And, because its attention never lapses and it never gets tired, it actually steers a better course in many conditions than a human helmsman, which means quicker passages, greater fuel economy and more accurate position reckoning.

As with all marine electronics, the microprocessor revolution has spelled smarter, more power-efficient and frequently more compact units, making possible, for example, the entirely self-contained tiller steering units that have extended the joys of having your own "George" right down to trailer sailers and outboard runabout fishing boats. A good modern autopilot can be programmed to sense the different conditions and adjust itself to them, increas-

ingly cutting out many of the adjustments that used to be necessary for the operator to make.

These include the dead band, or the zone in which the bow is allowed to wander before a course correction is made. This must increase naturally with heavier seas or the autopilot would be working overtime and wasting power. Another important function, the rate of turn, varies greatly with different crafts' differing steering characteristics as well as boatspeed — at faster speeds, less rudder is required to effect a course change.

A good counter rudder function is what makes a good autopilot really excellent. This is its ability to anticipate the point, before the desired course is reached, where the helm is gradually moved back to neutral so that the vessel stabilises on the correct course without overshooting and having to be steered back to it.


Among the new generation of autopilots, with microcircuitry to take care of much of these adjustments, is the Norwegian Robertson AP200 series (Quins of Port Adelaide) which includes in its programming the ability to pick up any rudder bias required to maintain straight line steering, like the weather

helm of a properly trimmed sailing craft. The rudder angle is synthesised so that the steering unit knows which position the rudder is in at any time. Functions such as rudder and counter rudder are chosen with one switch, and the rate of turn is controlled automatically. The series includes a navigational interface to calculate and order course to selected waypoints, while the large microprocessor capacity allows a number of expansion possibilities such as remote control, rudder angle indicator, and alarms.

The British Autohelm series (Solo Marine) has long been popular on cruising yachts, and the company has specialised in cockpit units where all the components including fluxgate compass, circuitry, controls and rudder drive are cockpit located. These have included the 800 and 1000 self-contained tiller drive units, and the more powerful modular 2000 linear drive and 3000 rubber belt connected wheel drive. The Autohelm 5000 and 6000 come closer to commercial type units in offering the main rudder drive options of rotary (i.e., electric motor, clutch and gearbox to drive either wheel or rudder stock), linear (suited to tiller type connections) or hydraulic where the rams are linked usually to the rudder quadrant. With the fitting of an optional windvane for course keeping to a relative wind angle, the microprocessor is smart enough to ignore short term changes of wind direction, using averages to look for significant shifts.

Autopilots were put to the supreme test during the recent BOC single-handed race around the world — and failures were legion. This is hardly surprising; few average users would expect theirs to handle wild down-wind running through mountainous seas during South Ocean gales.

Some BOC entrants accepted that their auto units would burn out from abuse, carried multiple backups and tossed the dead ones overboard as they went along. The best manufacturers,

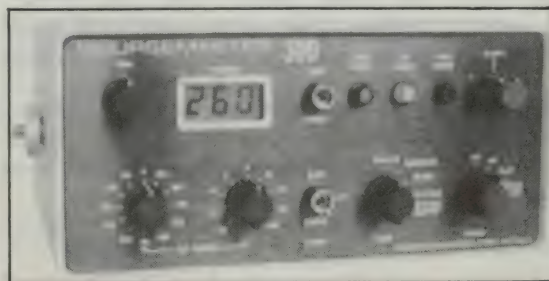

**The Australian-made Coursemaster 300 autopilot, which offers automatic "lock-on" course setting. (Courtesy Coursemaster Autopilots)**





**GME's GR-934 marine stereo features AM and FM stereo, electronic tuning, auto-reverse cassette deck and 16W/channel output. (Courtesy Greenwich Marine)**

providing keen backup and servicing in each stopover port, will probably learn from the failures and improve their models, and some competitors, like American Dave White aimed to take back their own experience and build a better autopilot.

One of the success stories in this area was that of the Australian manufactured Coursemaster 300 which did the trip around on Ian Kiernan's Triple M/Spirit of Sydney. At the end of the 27,000 mile event, Kiernan had nothing but praise for his Coursemaster.

"It was bloody excellent," he enthused. "I'm positive I had the best in the fleet". The unit, which had to steer Spirit at 20 knots in extreme conditions, maintained a low power drain of seven to eight amps, rising to not much over nine in the hardest running. Kiernan gave some credit for the unit's economy and reliability to using an electric motor powering a hydraulic pump and ram. Much of the reported BOC gear failure included the burnout of direct electric rotary drives, lacking the "buffer" of hydraulics.

Coursemaster's 300 is their top-of-the-line model, featuring both advance course setting by dial as well as the now popular "lock-on" course setting where the unit picks up the course being steered by the helmsman at the moment it is engaged. The company also offers the 250, a more modern unit in styling with its touch pad controls including finger-touch dodge.

## Marine hifi

What do you do while the autopilot is looking after the drudgery? Why relax by listening to marine hifi, of course! But there are a few things to consider before you go out and buy one.

Like any of the other sophisticated electronics that go on board your boat a hifi is inherently susceptible to the humid, salty marine environment. It's made worse by the fact that a cassette player must have a hole in it to accept a cassette — a ready made portal for the

entry of whatever moisture and salt the cassette or the air may carry.

Clearly, then, for durability and reliability a hifi going onto a boat should be just as well marinised and moisture-proofed as your satnav or radio transceiver.

Now any consumer walking into a car stereo specialist outlet these days is confronted by an enviable array of system and combinations of system. He's become accustomed to mixing and matching when he's choosing a sound system for his car or van — selecting radio, cassette and even compact disc combinations to suit his requirements, adding or subtracting amplifiers and graphic equalisers and playing around with speakers to his heart's content.

Until now, however, the economics of producing marinised hifi in much smaller volume for a specialised market have prohibited this kind of flexibility in installation choice. And as one importer of one of the few fully marinised sets on the market reports, buyer resistance has been considerable. People would want to use their own speakers, or might require the cassette deck but not the AM/FM radio. These, however, could not be split up given the economics of importing such small numbers of units.

The first decision the buyer will have to make, then, is whether to go for a basic marinised unit out of the box, or take a chance with the sea air survival rate of an auto system customised to his own requirements. The owner of a hard-sailed yacht anything smaller than 15-odd metres in length should go for a marine unit unless prepared to replace the sound system every year or two. Anyone who's spent more than a few hours sailing before a fresh following breeze, or battened down into a headwind blow with the offwatch tramping below in dripping oilskins, will appreciate how thoroughly soggy even the most watertight yacht interior becomes.

On the other hand, given a reasonable sized craft with good weather sealing, used largely for sheltered water

recreation chiefly in fair weather, there's probably not much wrong with an automotive installation if care is taken to site the "front end" - deck and controls — and ancillary equipment like booster amps in a dry, protected part of the interior. In or near the navigation centre, along with the other electronics, is a popular spot for locating hifi hardware, but an increasingly favoured installation is to create an entertainment centre in its own cabinet in the saloon. The opportunity then exists to make a real attempt at climate control by enclosing the lot within a hermetic space behind well designed doors of some sort.

It's important when considering installation to ensure that loudspeakers, which have strong external magnetic fields, are kept well away from steering compasses and fluxgate sensors.

Greenwich Marine Electronics (GME) has a range of Australian-designed marine stereo systems which are produced in a joint venture with a major Japanese car radio manufacturer, and distributed worldwide. Their model GR926, which retails for \$289, is a manually tuned AM/FM radio cassette with a weather band facility that allows selection of airport weather information broadcasts. More sophisticated is GME's GR934 featuring FM stereo, full electronic tuning and auto-reverse cassette player with Dolby noise reduction. Retail price is \$425.

GME also produces marinised stereo speakers to suit these systems, utilising polypropylene water resistant speaker cones which can be mounted in external areas like cockpits or flybridges.

AWA Marine has been importing and selling about 200 units a year of the Polaris MS 5000 marine stereo (\$870). This 50W set complete with its own three-way speaker system in rugged stainless steel boxes has a computer memory, quartz synthesised AM/FM tuner and auto-reverse cassette player with Dolby noise reduction and 5-band graphic equaliser. Moisture protection comes from polypropylene speaker cones, and a specially cased and gasketed front end with sealed moving switches along with coated circuit boards. In addition a flip-up perspex cover protects the face of the installation from splashes.

Due, however, to the abovementioned difficulties of the market for specially marinised hifi equipment AWA is finding it an uneconomical field and is currently running down stocks of this model.



# Keep In Touch With a *REALISTIC* Marine CB From Tandy



**New!**

## 1. AM/SSB Marine CB

**349<sup>95</sup>**

**Realistic TRC-621.** Our best marine CB provides 10 AM and 10 SSB channels for freedom of communication no matter where you are on the water! Ideal for speedy checks of weather reports, for letting people know where you are, or for those slow days when you need to know where the fish are biting. With digital display, squelch and RF gain. 12V DC. With mounting/microphone hardware. 21-9621

D.O.C. Approval #244023

## 2. Marine Transceiver

**179<sup>95</sup>**

**Realistic TRC-110.** Compact in size, yet big in performance! Adds the final touch to your boat for communication you can rely on! Includes 10 channels with a frequency coverage of 27.680 to 27.980 MHz. With two stage automatic gain control, hysteresis squelch circuitry and automatic noise limiter for crisp sounding reception. With public address mode. 12V DC positive/negative ground operation. 21-9142 D.O.C. Approval #2440050

## 3. Marine Walkie Talkie

**229<sup>95</sup>**

**Realistic TRC-211M.** Your link with land! This full-featured portable unit is ideal to take on any sized boat, from an out-board to a cruiser. 5 watts with emergency channel 88 crystals (6 channel operation with 5 more optional crystals), built-in mike and speaker. Combines a noise limiter, ceramic filter, auto-modulation and auto-gain for optimum reception. Req. 8 x "AA" Alk. or 10 x "AA" Ni-cad batteries. 21-9652

D.O.C. Approval #244024

**Tandy**  
ELECTRONICS

See Tandy for Your Marine Crystals  
and Antennas, Available at Over  
350 Stores Australia-wide.



**EA test drives and reports on**

# **The IFR A-8000 Spectrum Analyser**


Spectrum analysers have come a long, long way since they first appeared on the electronics scene. The latest models offer digital frequency synthesis and almost mind-boggling measurement capabilities, like IFR's new top of the line A-8000. Here's what we discovered when we took one for a "test drive"...

**by JIM ROWE**

I can still remember when I first came across a spectrum analyser. It was back in the late 1950s, when I was in about the second year of my electronics course.

There was this whopping great box in the corner of one of the labs, with a small cathode-ray tube screen up in one

corner and what seemed like about 30 control knobs. It looked a little like one of the you-beaut but terribly expensive early laboratory oscilloscopes made by one of those American firms like Tektronix or Hewlett-Packard (the ones we drooled over in the US magazine advertisements), but it wasn't.

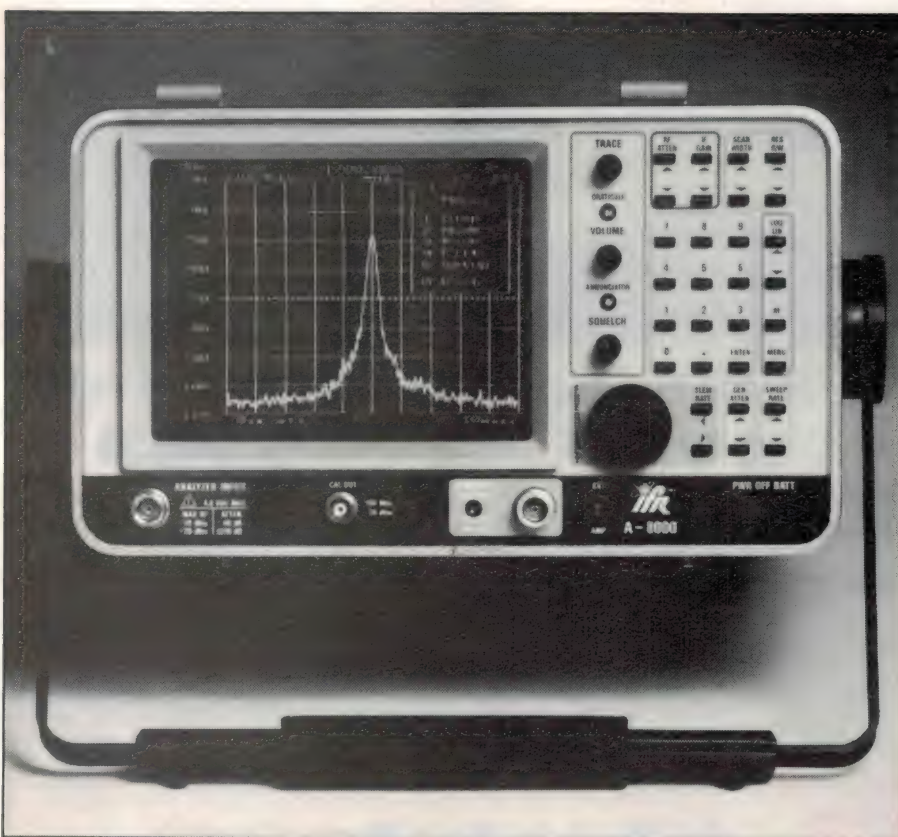

**The IFR A-8000 can display any part of the spectrum from 10kHz to 2.6GHz, in a single sweep if necessary. Based on a synthesiser, it is fully calibrated in terms of both frequency and amplitude.**

As I recall it wasn't even a complete analyser, but rather an analyser *adapter* which was designed to plug into a matching communications receiver, and make use of the receiver's front end circuitry. In fact I think it had been made by Hallicrafters, or one of the other US receiver manufacturers, for use by that country's armed forces during the second world war.


The basic idea was that by hooking up the analyser to one of the maker's receivers, you could use it to sweep over any desired part of the frequency spectrum, and look at the radio signals that were present. Each signal showed up as a vertical "blip" or peak on the horizontal trace, with the frequency the receiver was actually tuned to corresponding to the centre of the screen. From memory you could display about 500kHz of the spectrum either side of the receiver's tuning point.

It was a bit like a modern scanner, in that it let you monitor what was happening in the frequency range of interest. If a new signal popped up, you would see a blip on the screen, and could quickly tune into it to eavesdrop. Hopefully it would be a transmission by the enemy, and you'd discover things to your advantage. An early example of "bugging" or electronic surveillance, in effect...

From memory it was the only spectrum analyser possessed by the uni's school of elec engineering at the time, and they had picked it up for the proverbial "song" at an ex-services disposals auction with various other gear. I seem to recall that there was only one of the matching receivers around, too, and this was in almost constant use elsewhere. So most of the time the analyser adaptor just sat there, something of a white elephant.

Mind you, even when you hooked it up to the receiver and got the combination going the results were pretty disappointing. Like the early scopes the analyser was capable of little more than



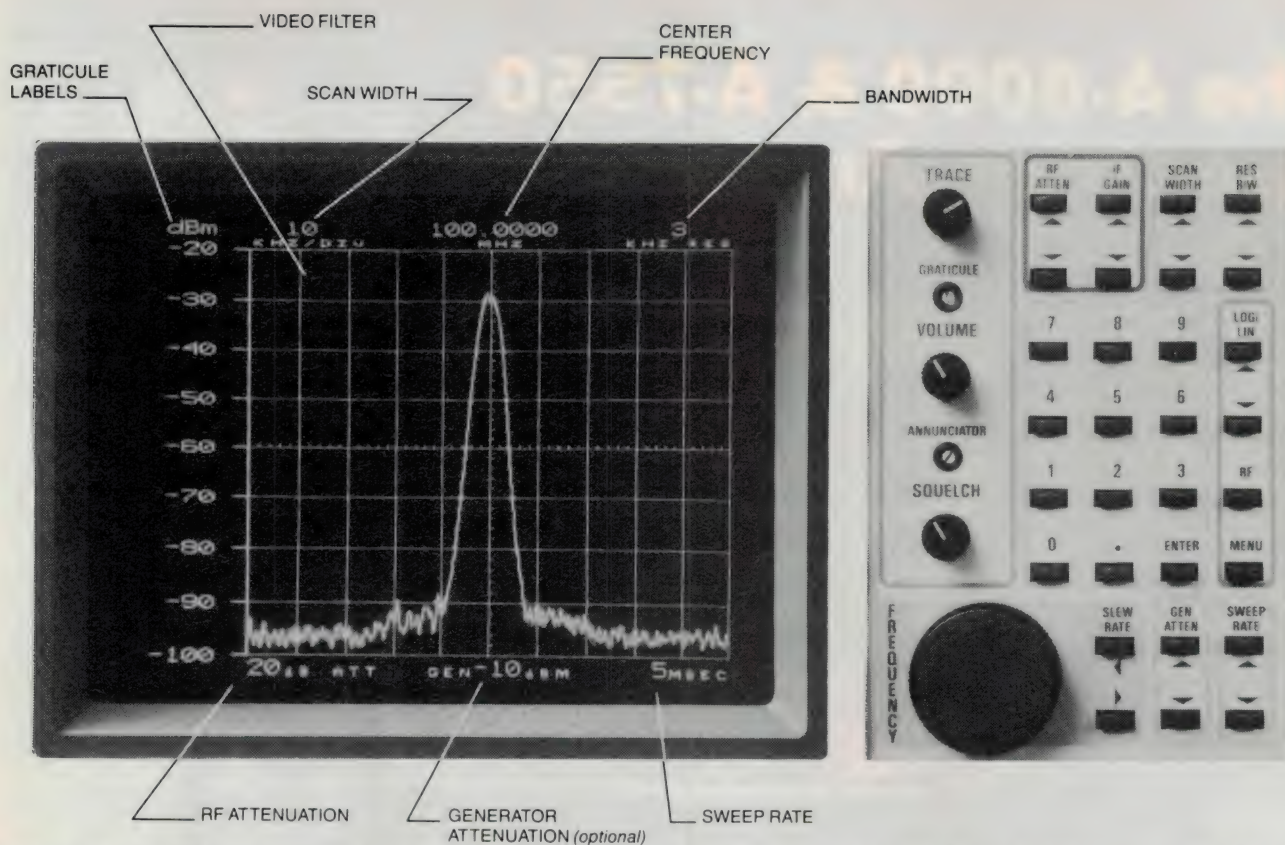

**All major parameters are displayed on screen, including centre frequency, scan bandwidth and amplitude calibration. Entry of all parameters is easy, using the keyboard and a series of on-screen menus.**

letting you "look" at the spectrum in a rough kind of way. The frequency sweeping was fairly non-linear, the vertical amplifier and gain system provided no way to accurately measure the amplitude of any of the signals (even the one you were tuned to!), and the whole setup drifted all over the spectrum until it had been operating for hours and the temperature had reached some kind of vaguely stable equilibrium.

In short, it wasn't really much of a measuring tool, in any sense of the word. But it was tantalising, to be able to see all those signals dancing up and down on the screen. I can remember thinking that wouldn't it be great when — one day — we'd be able to use such a spectrum analyser as a real measuring tool!

Well folks, I can testify that the day has well and truly arrived. Thanks to the good people at Vicom Australia, I've just been able to test drive one of the very latest all-singing all dancing, top of the line A-8000 digital spectrum analysers from IFR Systems Inc., of Wichita, in Kansas. And it's been a real eye-opener.

The A-8000 is so far ahead of that old WWII analyser that comparisons are mind boggling. For a start, it's a complete instrument in its own right, and

fully self contained. In fact with a small optional detector module fitted, it offers virtually all of the features of a modern synthesiser-driven communications receiver thrown in, as well as spectrum analysis. Plus a lot more, as I'll explain shortly.

Instead of the 1MHz — 30MHz frequency range offered by the old timer, the A-8000 can make measurements over a staggering 10kHz — 2600MHz. That's from audio right up to microwaves! And instead of the 1MHz or so maximum sweep width of the old timer, it offers virtually anything you want from +/-5kHz up to a mind-blowing "full sweep" mode, where it sweeps the full spectrum up to 2500MHz. Wow!

The sweep ranges are actually calibrated in terms of frequency change per horizontal screen division, rather like the timebase calibration of a good scope. And the screen is basically 10 major divisions wide, five either side of the centre frequency line. So the 17 sweep ranges go from 1kHz/division to 200MHz/div, in the usual 1-2-5 sequence. There's also an eighteenth range of 250MHz/div, which comes into operation in the "full sweep" mode, and a zero sweep mode for using the instrument as a straight receiver.

Of course it's all based on a digital frequency synthesiser, so you can key in

virtually any centre frequency you want to look at: anywhere between 10kHz and 2600MHz, in increments of (wait for it) only 100Hz. The basic timebase accuracy is 0.5 parts per million.

As well as being able to key in any centre frequency directly via the keyboard, you can also move along the spectrum continuously by turning a large rotary knob in either direction — just like tuning a conventional receiver. The knob basically "slews" you along in finite frequency increments, and the increments concerned can be set for any desired "dial slewing rate", from very fine to quite coarse.

The centre frequency itself is always indicated at the top centre of the screen, above the centre axis line.


The actual frequency resolution of the analyser is set independently of the centre frequency and sweep width. There are five ranges in this case, from 300Hz to 3MHz in decade steps. Both the sweep width and resolution are displayed at the top of the screen, either side of the centre frequency.

You can also set the rate at which the A-8000 actually sweeps the segment of the spectrum you're looking at, from a fairly fast 5ms/div to a very slow 10s/div.

If you're wondering how easy it is to adjust all of those parameters for accu-



# The A-8000 & A-7550 Spectrum Analyzers

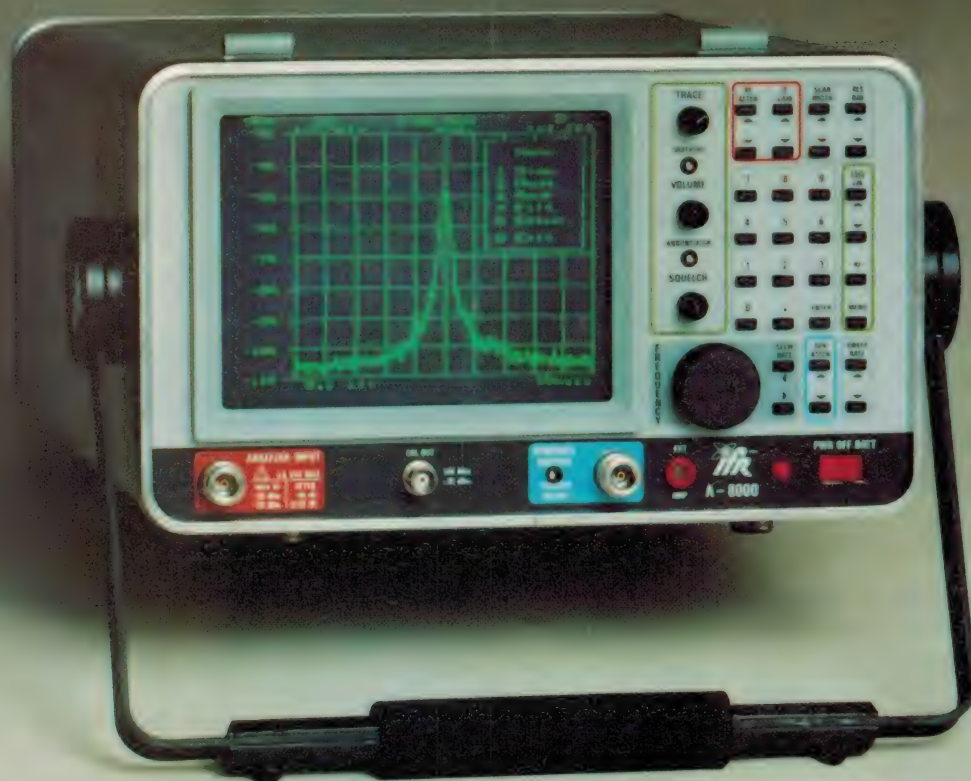

## Impressive Standard Features Include:

- Fully synthesized RF systems
- 10 kHz to 2.6 GHz frequency coverage (**A-8000**)  
10 kHz to 1 GHz frequency coverage (**A-7550**)
- Direct center frequency entry
- Accurate center frequency readout
- 70 dB dynamic range
- 300 Hz resolution bandwidth
- Menu driven display modes
- VRS™ (Vertical Raster Scan) CRT display
- Single function keyboard entry
- Automatically scaled electronic graticule
- Variable top scale reference (+ 30 to - 95 in 1 dB steps)
- IF gain in 1 dB steps
- 50/75Ω selectable input impedances (*optional*)
- Automatic optimization
- Automatic amplitude calibration
- Selectable linear / log display modes
- Digital storage of all displayed parameters
- Line, bar, average, compare and peak hold display modes
- 300 Hz and 30 kHz video filters

Vicom  
Australia Pty Ltd  
Head Office  
4 Meaden Street  
STH MELBOURNE  
VIC 3205  
PH (03) 690 9399



• MELBOURNE • SYDNEY •  
• BRISBANE • WELLINGTON •

Communication engineers for  
DEFENCE — MILITARY — GENERAL TEST EQUIPMENT  
Research and Service Facilities

Branch Offices:  
SYDNEY  
PH (02) 957 2766  
BRISBANE  
PH (07) 394 8308  
WELLINGTON  
PH. (04) 69 7625



rate results, don't worry. The A-8000 also contains a built-in microprocessor, which basically adjusts most of the controls automatically to give the right results. Whenever you vary one of the controls yourself, it automatically makes any changes to the others to compensate. It's called "automatic optimisation".

That doesn't mean you can't adjust them yourself if you want to; you certainly can. All that happens is that if you try setting one to a range that will conflict with the others, it will indicate this on the screen with an "UNCAL" message. What more could you ask!

On the amplitude side, the A-8000 is calibrated from -120dBm to +30dBm and has a 70dB dynamic range. It can measure in either logarithmic or linear fashion. There are actually two log scales, one with 10dB steps per major vertical screen division and the other with 2dB steps. The absolute scale calibrations are automatically displayed up the left-hand side of the screen.


A built-in programmable RF input attenuator provides up to 60dB of attenuation in 10dB steps. This is adjusted by two RF GAIN buttons on the front panel. Again the attenuator setting is displayed on the bottom of the screen, along with the sweeping rate.

Are you impressed yet? Not to worry, because there's still more to come. For example if you've got the communications receiver option fitted, you can simply press a MENU key and call up a menu of demodulation modes on the screen. There's narrow and wide band FM, SSB and wide and narrow band AM. Also a special "time share" mode, where the A-8000 can be arranged to alternate between sweeping the spectrum and letting you listen to a signal at the centre frequency you've set it for . . .

Another menu can be called up to set the kind of screen display you want for the spectrum analysis. As well as the usual "line" display, you can select bar graph, average or peak hold. You can also have the A-8000 store a spectrum display in its memory, and then bring it back for comparison with a second sample.

Yet another menu lets you select video low-pass filters, if desired. There's a choice of none, 30kHz, 300Hz or an optional quasi-peak mode.

The A-8000 also has an option to fit a GPIB interface, and if this is fitted it can output displays to an X-Y plotter. It can also be remotely programmed from a computer or ATE controller, using the same GPIB interface or a similarly optional RS-232C serial interface.

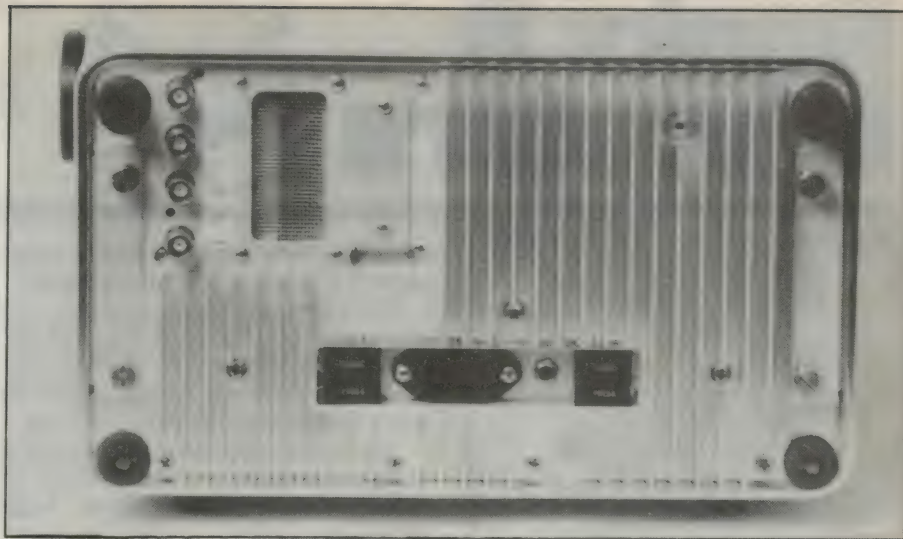

**Rear view of the A-8000, showing the additional connectors. These include drive for an X-Y plotter.**

But in some ways, the most impressive option you can fit into the A-8000 is a "Tracking Generator" module. This provides a sweep frequency output which exactly matches the sweeping of the spectrum analyser itself, with an output level adjustable (and programmable) from 0dBm down to -70dBm in 1dB steps.

The output impedance of the tracking generator is normally 50 ohms, like the input impedance of the A-8000's analyser section. However either or both can be changed to 75 ohms if required, with an optional adaptor.

No doubt you've realised some time back that with all of these gee-whizz features, the A-8000 must obviously be intended for a lot more than just eavesdropping over the spectrum, as a kind of super scanner. You're quite right, of course.

One very important use for this kind of analyser is testing the output of virtually any kind of equipment designed to produce an RF signal, to measure the signal bandwidth and the presence or amplitude of any spurious signals that may be produced along with the main/intended signal. So designers, manufacturers and service people working on exciters and transmitters need to use one, to check for correct operation. Needless to say it can very easily show the presence of any spurious outputs, and let you measure their frequency and amplitude.

Another use is for testing other equipment that generates a strong RF signal as part of its own internal operation, but isn't supposed to radiate any of it when it's working correctly. The spectrum analyser can again let you track down any energy that does leak

out, and measure it. It is therefore an extremely important tool for the control of electromagnetic interference (EMI).

Of course with the tracking generator option fitted, the A-8000 also becomes a complete sweep-frequency analyser, which can be used to measure the performance of amplifiers, filters, resonators, attenuators, antenna systems, duplexers or what have you — anywhere over its audio-to-microwaves frequency range. This makes it a particularly valuable tool for the RF design lab.

How did I find it? Well, the sample A-8000 loaned to us by Vicom had both the communications receiver and tracking generator options fitted, and frankly taking it for a "test drive" was magic. It's just so easy to look at any part of that whopping 10kHz-2.6GHz chunk of spectrum, from the whole thing right down to a tiny 10kHz-wide sliver. Just key in the parameters, and there it is! All with the accuracy and stability of a top-notch modern digital frequency synthesiser, and the convenience of a built-in microprocessor.

Now for the sobering part. Needless to say an instrument with the capabilities of the A-8000 doesn't come cheap. The basic analyser costs a cool \$25,800, while if you want to add those beautiful receiver and tracking generator options, these jack the price up to a tidy \$34,000. I guess that means that most of us will still only be able to dream about one, or at the most rent one for a day or two when we really need it.

If you're one of the lucky ones who can consider buying one, talk to the people at Vicom Australia. They're in Sydney, Melbourne, Brisbane and Wellington. The phone number in Sydney is (02) 957 2766.

EA



# Books & Literature



## Appliance history

**ELECTRICAL APPLIANCES**, by Penny Sparke. Published by Unwin Hyman, 1987. Soft covers, 209 x 196mm, 112 pages. ISBN 0 7135 2737 4. Recommended retail price \$24.95.

An interesting book which traces the history of familiar household electrical appliances like the iron, vacuum cleaner, refrigerator, cooking range and toaster. But not from the technical function point of view, rather from their aesthetic design and sociological significance. The author is a senior tutor in the history of design, at the Royal College of Art in London, and apparently broadcasts in the UK regularly on both TV and radio, on the broad subject of design.

Despite the fairly heavy emphasis on aesthetics and sociology, there's still quite a lot to interest the technical reader. It's intriguing to see the first crude models of each kind of appliance, the story behind their development and the various permutations and combinations that have evolved over the years. Even the way that changing design fashions have altered their external appearance can be quite interesting.

It was only in places where the author seemed to be seeking to draw deep philosophical and sociological conclusions from these things that I found it heavy going. While it's fairly obvious that the form and function of home appliances will not be unrelated to the status of domestic activities, and thus historically with the status of women, somehow Ms Sparke seems to be trying to read a lot more into this.

So be aware that it's a history of electrical appliances, but from a slightly

specialised viewpoint, and with a certain amount of axe-grinding by the author.

The style is also fairly academic, and reminiscent of a thesis. It does end with a fairly comprehensive bibliography, though, so those who wish to pursue the topics further will find plenty of leads.

The review copy came from Allen & Unwin Australia, but you should be able to find it at most of the larger bookstores. (J.R.)


## Interfacing micros

**PRACTICAL MICROPROCESSOR INTERFACING**, by S.A. Money. Published by Collins Professional Books, 1987. Hard covers, 242 x 160mm, 247 pages. ISBN 0 00 383329 1. Recommended retail price \$68.00.

A practical and fairly up to date, though relatively basic book on interfacing microprocessors to external devices. It is intended for the engineer or design technician as yet unfamiliar with microprocessors, or perhaps the senior student in a digital electronics course.

It begins with a couple of chapters on basic microprocessor and computer/controller system operation, then moves on to introduce the basic concepts of parallel I/O interfacing. This is followed by a chapter on practical parallel interfaces and their applications, including the GPIB/IEEE488 bus.

Following this in turn is a chapter on

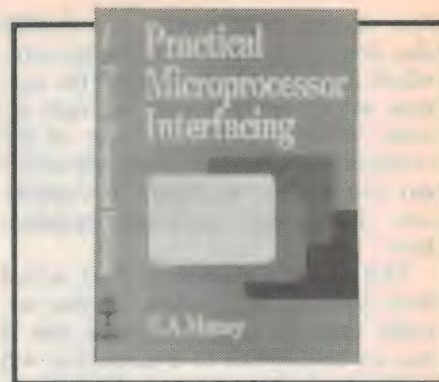

serial data principles, leading to a discussion of the various serial I/O interfaces — including RS232C, RS442 and RS423. Then there are sections on counting and timing systems, analog input and output interfaces, and interrupt operation.

The treatment throughout is down-to-earth, with many circuit examples using real-world logic devices and other components. There is also frequent discussion of timing, deglitching and other practical considerations, plus plenty of material on basic machine/assembly language programming of the interfaces described.

It does assume quite a good grasp of basic microprocessor operation and programming, though. In fact despite the introductory material up front, I believe the reader without this background will find it quite heavy going in places — particularly with respect to programming.

But for those with this background, it's a book which should be found very useful as a practical design guide and reference.

The review copy came from Blackwell Scientific Publications. (J.R.)

## Waveguide design data

**A HANDBOOK FOR THE MECHANICAL TOLERANCING OF WAVEGUIDE COMPONENTS**, by W.B.W. Alison. Published by Artech House, 1987. Hard covers, 237 x 160mm, 470 pages. ISBN 0 89006 256 0.

This is actually a reprint of a reference book that was originally published in the UK in 1972, and has since become something of a classic in microwave design circles. It has apparently been out of print for some years, and Artech has republished it to meet the continuing demand.

The book is essentially a collection of data amassed by the author and co-workers at Telecommunication Instruments Limited in Great Yarmouth, Norfolk, working under Ministry of De-

fence contracts designed to discover ways to improve the performance of passive microwave components.

There's design information on basic waveguide components, twists, bends and corners, irises, posts, tuned windows and quarter-wave transformers, tapers, directional couplers, hybrid couplers, terminations, duplexers and waveguide/coaxial line transitions. It's virtually a complete reference to practical microwave "plumbing", chock-full of design formulae, reference tables and graphs.

A little too esoteric for the general reader, perhaps, but invaluable for the working microwave design engineer.

The review copy came direct from the publisher, but the larger technical bookstores will no doubt be able to order it on request. (J.R.)



# RITRONICS WHOLESALE Pty. Ltd.

56 Renver Road, CLAYTON, 3168, VICTORIA, AUSTRALIA. Phone (03) 543 2166 (4 lines). Telex AA151938

Minimum account order is \$50, minimum cash sale is \$25. Minimum post/pack \$3.00 Minimum account post/pack \$5.00. Comet Road Freight, bulky items and/or over 10kg is extra. Bank Card, Visa and Master Card Welcome!

Errors & Omissions Excepted



## VOLTAGE REGULATORS

Desc.	10-	100-	1000-
7805uC	45	44	43
7805KC	1.50	1.40	1.20
7812uC	45	44	43
7812KC	1.50	1.40	1.20
7818uC	50	49	48
7818KC	1.50	1.40	1.20
7905uC	70	60	55
7912uC	70	60	55
uA323KC	4.50	3.90	3.75

Plus 20% tax where applicable



## PANEL METERS

Cat.No.	Description	1-9	10-	100-
Q10500	MU45 0-1mA	8.50	7.95	7.75
Q10502	MU45 0-50uA	8.50	7.95	7.75
Q10504	MU45 0-100uA	8.50	7.95	7.75
Q10505	MU45 0-50uA	8.50	7.95	7.75
Q10510	MU45 0-5A	8.50	7.95	7.75
Q10518	MU45 0-1A	8.50	7.95	7.75
Q10520	MU45 0-20V	8.50	7.95	7.75
Q10535	MU45 VU	9.50	8.95	8.75
Q10530	MUS2E 0-1mA	9.95	8.35	
Q10533	MUS2E 0-5mA	9.95	8.35	
Q10538	MU65 0-50uA	12.50	11.35	10.90
Q10540	MU65 0-1mA	12.50	11.35	10.90
Q10550	MU65 0-100uA	12.50	11.35	10.90
Q10560	MU65 0-20V	12.50	11.35	10.90

Plus 20% tax where applicable



## TRANSFORMERS

Cat.No.	Description	1-9	10-	100-	1000-
M12851	2851	3.50	3.30	2.90	
240V 12-6V CT 150mA					
M12155	2155	6.00	5.75	5.50	
240V 6-15V 1A tapped					
M12156	2156	9.00	8.75	8.50	
240V 6-15V 2A tapped					
M12840	2840	3.50	3.30	3.10	
240V to 9V C.T. at 150mA					
M12860	2860	3.50	3.30	3.10	
240V to 15V C.T. at 250mA					
M16672	6672	8.95	8.75	8.40	
240V 15-30V 1A tapped					

Plus 20% tax where applicable



## CANNON TYPE AUDIO CONNECTORS

We've sold 1000's because of their great value!

Cat.No.	Description	1-9	10-
P10960	Pin Line Male	2.50	2.00
P10962	Pin Chassis Male	2.30	1.90
P10964	Pin Line Female	2.95	2.75
P10966	Pin Chassis Female	3.10	2.90

Plus 20% Sales Tax where applicable

## RESISTORS

1/4 Watt E12 carbon  
Bulk packed \$6.50 per 1,000  
Taped and boxed \$6.50 per 1,000  
\$50.00 per 10K lots  
1/4 METAL FILM TAPED AND BOXED  
\$14.00 per 1,000 lot  
\$120.00 per 10K lot  
SUPPLY E24 VALUE  
Plus 20% tax where applicable

## COMPUTER CONNECTORS

Cat.No.	Description	1-9	100-	1000-
P10900	DB25 Plug	0.80	0.70	0.50
P10901	DB25 Skt.	0.90	0.75	0.50
P10902	DB25 Cover	0.80	0.65	0.55
P12210	Cent. Solder	3.50	3.15	2.50
P12200	Cent. Crimp	4.50	4.00	3.50
P10880	DB9 Plug	1.30	1.20	0.90
P10881	DB9 Skt. 1.40	1.30	1.00	0.90
P10882	DB9 Cover	0.60	0.55	0.50
P10890	DB15 Plug	1.30	1.20	0.90
P10891	DB15 Skt. 1.40	1.30	1.00	0.90
P10892	DB15 Cover	0.65	0.55	0.50

Plus 20% tax where applicable

## LEDs 5mm STANDARD


Desc.	10-	100-	1000-	10,000-
Red	\$0.10	\$0.09	\$0.08	\$0.07
Green	\$0.15	\$0.10	\$0.09	\$0.08
Yellow	\$0.15	\$0.10	\$0.09	\$0.08

Plus 20% tax where applicable

## TRANSISTORS

Desc.	10-	100-	1000-
2S149	5.50	4.90	2.5K134 5.50 4.90
PN2222A	11	09	PN2907A 10 09
PN3563	18	16	PN3565 12 11
PN3566	15	13	PN3567 10 08
PN3568	18	16	PN3639 18 15
PN3640	18	16	PN3641 11 09
PN3642	11	09	PN3643 11 09
PN3644	15	13	PN3645 15 13
PN4250A	15	13	PN4355 18 16
PN4356	19	17	MPSA42 20 15
MPSA43	11	09	MPSA55 18 17
MPSA56	19	16	MPSA92 12 11
MPSA93	14	12	SC141D 1.00 0.90
BU126	1.90	1.85	BUX80 3.60 3.50
BU208	2.75	2.50	2S0390 3.90 3.75
BU326	2.25	2.15	BC547 10 09
BC548	10	09	BC549 10 09
BC557	10	09	BC558 10 09
BC559	10	09	

Plus 30% tax where applicable



## 500K DISK DRIVE FOR IBM\*

1-9	10-	100-
\$145	\$135	\$125

Plus 20% tax where applicable  
(\*IBM is a registered trademark)

## HARD DISK DRIVE FOR IBM\*

• 20 MByte • Seagate or Microscience hard disk • Hard disk controller by DTC Cat. X20010	\$695
---	-------

Plus 20% tax where applicable

## DISK DRIVE FOR APPLE\* (6502 SYSTEM)

1-9	10-24	25-
\$165	\$150	\$135

Plus 20% tax where applicable  
(\*Apple is a registered trademark)



## 12V SEALED LEAD ACID BATTERIES

Description/Cat.No.	1-9	10-
1.2 AH S15029	\$12.50	\$11.75
2.6 AH S15031	\$17.70	\$16.50
4.5 AH S15033	\$23.40	\$22.00

Plus 20% tax where applicable

## GREY FLAT RIBBON CABLE IN 100 FOOT ROLLS

Cat.No.	Desc.	1-3	4-9	10-99	100-
W12614	14 Way	19.50	18.50	18.00	14.00
W12616	16 Way	21.50	19.50	19.00	16.00
W12620	20 Way	29.50	28.00	26.50	20.00
W12625	25 Way	32.50	29.00	28.50	25.00
W12626	26 Way	34.00	32.00	29.00	28.00
W12634	34 Way	44.00	42.00	39.00	34.00
W12636	36 Way	49.00	47.00	42.50	36.00
W12640	40 Way	55.00	52.50	49.50	40.00
W12650	50 Way	62.00	59.50	56.50	50.00

LARGER QUANTITIES NEGOTIABLE!  
Plus 20% tax where applicable

## MEMORY

"Check for the latest memory prices!"

	10-99	100-	1000+	10K+
2532	\$10.00	\$9.00	\$8.00	\$7.50
2716	\$8.50	\$8.00	\$7.50	\$7.00
2732	\$7.65	\$7.25	\$6.90	\$6.50
2764	\$6.60	\$6.20	\$5.90	\$5.75
27128	\$7.50	\$7.00	\$6.50	\$6.00
27256	\$9.50	\$9.00	\$8.50	\$8.00
27512	\$22.00	\$21.00	\$16.50	\$16.00
4164-15P	\$2.00	\$1.75	\$1.65	\$1.60
41256	\$5.95	\$5.50	\$5.00	\$4.80
6116P-3	\$3.00	\$2.90	\$2.20	\$2.00
6264	\$5.50	\$5.00	\$4.75	\$4.50

Plus 20% tax where applicable

## POLYESTER 100V "GREENCAP" TYPE

Cat.No.	Description	1-99	100-	1000-
R15131	001uF	0.06	0.04	0.03
R15137	0012uF	0.06	0.04	0.03
R15138	0015uF	0.06	0.04	0.03
R15140	0022uF	0.06	0.04	0.03
R15142	0033uF	0.06	0.04	0.03
R15143	0039uF	0.06	0.04	0.03
R15145	0047uF	0.06	0.04	0.03
R15146	0056uF	0.06	0.04	0.03
R15147	0082uF	0.06	0.04	0.03
R15148	01uF	0.07	0.05	0.04
R15150	015uF	0.07	0.05	0.04
R15152	022uF	0.07	0.05	0.04
R15154	033uF	0.07	0.05	0.04
R15155	039uF	0.07	0.05	0.04
R15156	047uF	0.08	0.06	0.05
R15157	056uF	0.08	0.06	0.05
R15158	068uF	0.08	0.06	0.05
R15159	082uF	0.08	0.07	0.05
R15160	1uF	0.09	0.08	0.07
R15162	15uF	0.11	0.10	0.09
R15164	22uF	0.15	0.14	0.13
R15165	27uF	0.16	0.15	0.14
R15172	1uF	0.70	0.55	0.50
R15176	2.2u	1.20	1.10	1.00
R15178	3.3uF	1.50	1.20	

Plus 30% tax where applicable

## 75 OHM COAX CABLE IN 100M ROLLS


Cat.No.	Description	1-4	5-	10-
W11222	3C2V	25.00	24.00	23.00
W11224	5C2V	30.00	29.00	28.00

(5C2V WHITE OR BLACK)  
LINE LOSS PER 100 FEET (33M 200MHz)  
W11222 3C2V 6.2dB (Approx.)  
W11224 5C2V 9.9dB (Approx.)  
Plus 20% tax where applicable

## TELEPHONE CABLE (200 METRE ROLLS)

Cat.No.	Description	1-9	10-
W11302	2 Pair	\$24.00	\$22.00
W11303	3 Pair	\$29.00	\$27.00
W11310	10 Pair	\$120.00	\$115.00


Per 200m Roll  
20% Sales tax where applicable



## FANS

Cat.No.	Description	1-9	10-	100-
T12461	240V 4 1/2"	11.00	10.00	9.00
T12465	240V 3 1/2"	11.00	10.00	9.50
T12463	115V 4 1/2"	11.00	10.00	9.00
T12467	115V 3 1/2"	11.00	10.00	9.50


(Fan guards to suit also available)  
Plus 20% tax where applicable



## VERBATIM DATA LIFE DISKETTES

Cat.No.	Description	10-	100-	1000-
5 1/4" SS/DD	\$22.00	\$20.00		
5 1/4" DS/DD	\$25.00	\$23.00		
5 1/4" H/Density	\$40.00	\$38.00		

Plus 20% tax where applicable



## PRINTER RIBBONS

Cat.No.	Description	3-	25-	100-
C22036	9.00	8.00	7.50	


Plus 20% tax where applicable



## RITRON II MONITORS

Desc./Cat.No.	1-9	10-	50-
Green Cat. X14506	\$145	\$135	\$130
Amber Cat. X14508	\$145	\$135	\$130

Plus 20% tax where applicable



## SAMSUNG TTL MONITORS

Cat.No.	Desc.	1-3	4
X14500	Green	\$130	\$125
X14502	Amber	\$135	\$130

Plus 20% tax where applicable

## FREE 58 PAGE WHOLESALE PRICE LIST!

Simply supply a Business Card!



# Solid State Update



KEEPING YOU INFORMED ON THE LATEST DEVELOPMENTS IN SEMICONDUCTOR TECHNOLOGY

## Power op-amp with VMOS output

The 1463 is third in a series of high speed, FET input, VMOS output power op amps. It operates from  $\pm 15V$  to  $\pm 40V$  supplies and has a guaranteed output of  $\pm 28V$  at 1A with  $\pm 36V$  supplies. The complementary VMOS output stage eliminates the safe operating area (SOA) restrictions and secondary breakdown problems that plague virtually all other presently available power op amps.

Internally compensated for unity gain stability, the 1463 still achieves an outstanding 80V/us slew rate (under full load condition), 7.5MHz gain-bandwidth (GBW) product, and 250ns settling time to 0.1% (10V step). Input bias current and offset voltage are guaranteed less than  $\pm 200pA$  and  $\pm 5mV$  respectively.

Further information is available from Reserve Electronics, PO Box 197, Wembley 6014.

## New Aluminium Gallium Arsenide LEDs, displays

Hewlett-Packard has announced a new family of LED indicators and displays based on aluminum gallium arsenide (AlGaAs) technology. The new offering, which includes 12 LED lamps and four seven-segment displays, is ideal for applications ranging from low-current or battery-powered equipment to systems that must be viewable in sunlight.


The new parts use double-heterojunction aluminum gallium arsenide (DH-AlGaAs), which yields efficient and bright products that can operate at lower currents than existing high-efficiency red materials.

The LED lamps fall into three categories: low current, high brightness and very high brightness. The high-brightness lamps include two T-1 3/4 LEDs (HLMP-D101/D105), two T-1 LEDs (HLMP-K101/K105) and one subminiature LED (HLMP-Q101). These products typically provide from 185 to 700% more light output than existing HP high-efficiency red LEDs at 20mA.

Low-current lamps also include two each of the T-1 3/4 (HLMP-D150/-D155), the T-1 (HLMP-K150/-K155)

and one subminiature lamp (HLMP-Q150). These lamps are specified at 1mA. Typical intensities are between 2 and 10 millicandelas (mcd), depending on package style and part number. These LEDs are 2.5 to 12 times brighter than low-current LEDs presently offered by HP.

Two T-1 3/4 LEDs are being introduced in the very brightness category. The package shape and narrow viewing angle of approximately 8° maximise on-

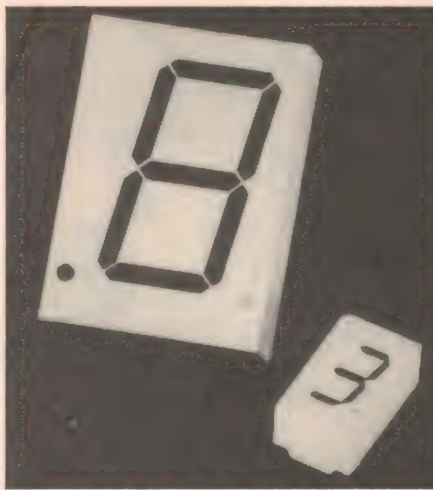

axis intensity to 750mcd (HLMP-4100 at 20mA) and 1000mcd (HLMP-4101 at 20mA).

The seven-segment displays are available in four sizes: 0.3-inches/7.6mm (HDSP-A101 series), 0.43-inches/10.9mm (HDSP-E100 series), 0.56-inches/14.2mm (HDSP-H101 series) and 0.8-inches/20mm (HDSP-N100 series). These displays are specified as low-current devices (1mA per segment drive current). However, they are not limited to low-current applications.

All of the new LED lamps have an operating temperature range of  $-20$  to  $+100$  degrees C whilst the display products operate over the temperature range of  $-20$  to  $+85$  degrees C. AlGaAs products are available only in red.

For further details contact VSI Electronics, 16 Dickson Avenue, Artarmon 2064.

## 68020 successor

Motorola's Microprocessor Products Group has announced that its latest 32-

bit microprocessor, the MC68030, is now in the evaluation stage. The new superchip, to be delivered by the end of this year, achieved first silicon on April 16, 1987. Motorola also announced first silicon for the MC68882 Enhanced Floating Point Coprocessor (EFPC).

Nicknamed the 030 (oh-thirty), the MC68030 is the latest generation in Motorola's M68000 family of fully compatible microprocessors, currently used in more than 7 million computer systems. The 030's immediate predecessor, the MC68020 (020), is used by the vast majority of 32-bit system manufacturers, including Apple Computer in its Macintosh II.

According to Motorola, the 030 will set the highest performance standards ever for 32-bit general purpose microprocessors. The 030 provides up to twice the performance of the 020, which Motorola claims to already outpace the Intel 80386. At the same time, the 030 maintains 100% upward compatibility with the entire family of M6800 microprocessors, as well as a \$2 billion base of proven 32-bit software.

The new chip's performance is due in part to its high degree of parallelism. The 030 is the first microprocessor to use a Harvard-style architecture, which provides dual internal data and address buses.

New 030 features include an on-chip instruction cache and an on-chip data cache with burst fillable mode, an improved bus interface, and an on-chip paged memory management unit (MMU) with built-in translation cache.

## CMOS remote control encoder/decoder chip

Motorola has introduced the MC145030, a new second generation single chip CMOS remote control encoder/decoder that enables customers to significantly reduce component count and PCB area. The MC145030 features wide (2.0 to 6.0V) supply voltage operation, 512 9-bit user selectable address codes, on-chip input amplifier, and separate I/O pins for the encoder/decoder. Manchester encoding and decoding is provided on chip.

The encoder serially transmits the data information upon receipt of a





Transmit Enable. Upon receiving the 9-bit serial data, the decoder compares it with the address setting. The decoder output toggles if the received code matches with the address setting. Decoder reset is provided for initial state setting.

The MC145030 operates in a low supply range of +2V to +6V by employing the same process technology as high-speed CMOS. This enables the device to be used in applications where only two batteries are employed.

The MC145030 interfaces with RF, ultrasonic, or infrared modulators and demodulators. Applications for this single-chip device include cordless phones, paging systems, garage door openers, fire alarm systems, car security systems, and any other applications requiring security coding.

## Active filters, resistor networks and oscillators

Datel has announced the availability of a complete family of resistor and voltage tuneable filters, digital programmable filters, logic controlled networks, resistor tuneable oscillators and oscillator adapters. The 37 new items provide front-end filtering and peripheral conditioning for data acquisition systems.

The FLJ-ACR1 and ACR2 are logic controlled resistor network products designed for use with resistor tuneable filters (such as the Datel FLJ-UR series). They offer four resistor networks, with each network comprising four resistors ( $R$ ,  $R/2$ ,  $R/4$  and  $R/8$ ). The  $R$  value in the FLJ-ACR1 is 1.59 ohms, while that

in the FLJ-ACR2 is 159k ohms.

The FLJ-UR series of Single In-Line hybrid resistor tuneable filters offer two cut off frequency ranges (low range from 40Hz — 1.6Hz and high range from 400Hz — 20kHz) and are available in 1-, 2- or 4-pole configurations for lowpass, highpass and bandpass output functions. The FLJ-UR series feature a 135dB or 100dB/octave value with a  $1/3$  octave bandwidth ( $Q = 4.32$ ) bandpass filter.

The FLJ-D1, -D2, -DC are digital programmable filters for high accuracy and high stability applications, and can set the cutoff and centre frequency with 3 digit BCD signals. The resonant frequency program range is from 1Hz — 159.9kHz (or determined by external capacitors) and is accurate to 0.1%. Two-pole lowpass, highpass and bandpass output functions are available simultaneously from three different outputs.

The FLJ-D5, -D6 filters are high order, lowpass types and provide 5-pole, 60dB or 6-pole, 80dB/octave filtering specifications. They are Chebyshev types and the cutoff frequency is programmed with 3-bit, TTL-compatible digital logic with a maximum of 8 levels of settings.

The FLJ-AC01 is an oscillator adapter for the FLJ-D series of digital programmable filters and has a frequency range of 100Hz — 100kHz, with a low 0.1% distortion at 10kHz. The output voltage is trimmed internally to provide a 2.5V rms 0.5% output.

The ROJ-20, -1K series provides highly stable, resistor tuneable oscillators with low distortion (0.0018% at 1kHz). Oscillating frequency is set by two external resistors. Output frequency of the ROJ-20 is 20Hz-20kHz, while the FOJ-1K is 1kHz — 100kHz. Sine and cosine waves for both units are generated from two output terminals, and an input terminal is provided to tune the relationship of the two outputs.


For further information contact Elmeasco, which has offices in Sydney, Melbourne, Brisbane, Adelaide and Perth.

## Precise +5V reference

Analog Devices has released a precise +5V reference featuring low initial offset error, low drift, and low cost in an 8-pin hermetic Cerdip. The AD586 provides offset and drift as low as 2.5mV and 5ppm, respectively, and is suitable for operation as a system reference with 16-bit DACs, power supply controllers, and autocalibration systems.

A proprietary noise reduction feature

lets the user reduce the already low wideband noise by adding a single capacitor. A proprietary buried zener diode and production laser trimming provide low error, low noise, and high stability over time and temperature. Typical long term stability is 15 ppm/1000 hours. The output noise of the AD586 achieves a low 4uV peak-to-peak (p-p) value in the 0.1 to 10Hz band, and is only 200uV p-p to 1MHz. An external 1uF capacitor connected to the Noise Reduction pin on the IC reduces this wideband noise to 160uV p-p. The reference value can also be "fine-trimmed" with a single external potentiometer to provide exactly +5.000V, or to provide an output voltage that differs from nominal, such as +5.12V for binary applications. A total trim range of +300mV, -100mV is available.

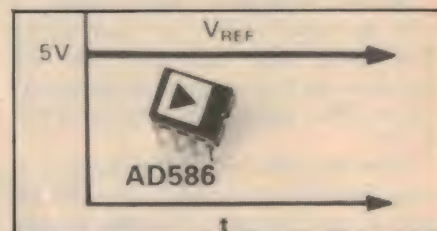

The load regulation of the AD586 — 100uV/ma — provides output stability as the amount of load current changes, such as when a DAC or ADC switches internally or when varying loads occur on the reference output. Up to 10mA of current can be supplied by the AD586, which requires a +10.8V to +36V power supply.


Further details from Parameters, 25-27 Paul Street Nth., North Ryde 2113.

## 1500V PIN diode chip

A new high voltage PIN chip, Model CSB3779, has just been released by Alpha Industries. The device features 1500V minimum  $V_b$  at 10uA, low RF resistance, low thermal impedance, and hermeticity at the chip level.


Capable of meeting screening up to JANS, the chips are ideally suited for applications including high power phase shifting and radiation detection. Device specifications include a maximum power dissipation of 35W, junction capacitance ( $C_j$ ) of 2.5pF max at 100V, series resistance ( $R_s$ ) of 0.5 ohms typical at 100mA and carrier lifetime (TL) of 6us typical for  $I_f = 10mA$ ,  $I_r = 6mA$ .

For further information contact Benmar International, GPO Box 4098, Sydney 2001.

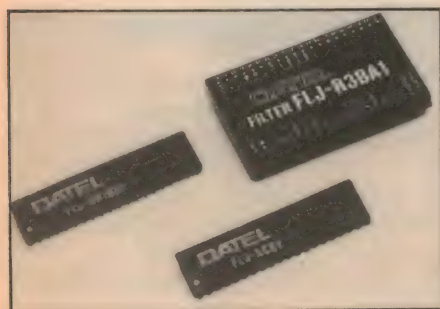



# New Products

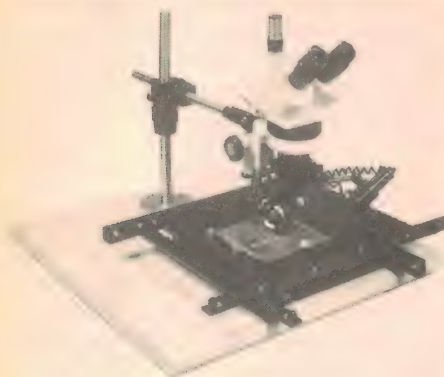

## SMD inspection station

Hunter Equipment has released a new inspection station for miniaturised PCBs using SMD technology. The station features a Meiji zoom stereo microscope with a magnification range of 4 to 22.5X.

Apart from the wide zoom range, features include a viewing angle variable over 45 degrees and a rotatable systematic indexing stage. The workpiece stage moves freely through the X axis, with 10mm and 20mm indexing pitches along the Y axis; it also rotates about a centre point to allow maximum vision on even the most densely populated boards. Lighting is provided by two lamps which can be adjusted for both intensity and spread of light.

These features are claimed to make the station the most versatile SMD inspection equipment currently available. Both binocular and trinocular versions are available.

Further information is available from Westinghouse Systems, 80-86 Douglas Parade, Williamstown 3016.

## Analog-digital converter card for VME bus

PEP Modular Computers has introduced a new low cost versatile VME-bus module which will accept up to 16 single-ended analog channel inputs or 8 differential mode analog inputs. Designated VADI, it is intended for process automation, data acquisition, monitoring and control systems. It is designed to interface to sensor or analog signals, and to convert those inputs into standard digital data commonly used in computer systems.

The VADI is pin compatible to Analog Devices signal conditioning modules

series 3 Bxx and 5 Bxx.

Conversion time is 8 $\mu$ s minimum. Throughput rate is 90kHz max. in 5 programmable steps. Gain can be programmed in 4 steps, x1, x10, x100, x500. Channel sequences are programmable from 1 to 16.

The VADI module is accommodated on a single height standard Eurocard.

For further information contact Dindima Group, PO Box 106, Vermont 3133.



## IDC conversion kit

Scope Laboratories has released the 506 Retrofit Kit, which converts a standard Scope 501 or Precision 502 Panapress into a 505 insulation displacement connector (IDC) bench assembly press.

The Kit includes the assembly base, standard plate, modified ram guide arm and allen key.


For further information contact Scope Laboratories, 3 Walton Street, Airport West 3042.

## 850Mb "electronic disk"

Featuring an "unformatted" storage capacity of 850 Mbyte on a solid state dynamic RAM, the Philips CC-95/2 Electronic Disk offers 200 $\mu$ s average access time through an SCSI interface.

The CC-95/2 may be equipped with an optical disc back-up and is protected against loss of mains power by a UPS. At present the unit can be extended to 1 gigabyte, using full SCSI possibilities in one 19" rack housing. The data transfer rate is up to 730Kbyte/sec.

For further information contact Philips Scientific & Industrial, 25-27 Paul Street North, North Ryde 2113.

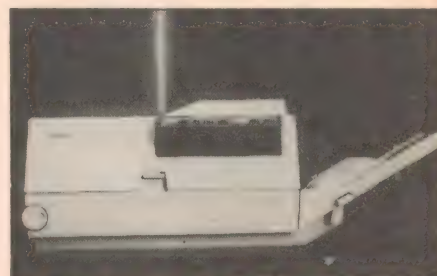

## Lowest cost laser printer?

The OKI Laserline 6 laser printer is a very compact desktop page printer with features previously only found on laser printers costing much more. Costing only \$2995, the OKI provides crisp 300dpi printing of text and graphics, in 15 resident and 27 optional cartridge based fonts.

The printer is fully industry standard, with Hewlett Packard LaserJet emulation. Serial and parallel ports are built-in. All the normal laser printer facilities are available, including graphics, vertical (portrait) and horizontal (landscape) format printing.

You can feed most things into the Laserline too, including A4, B5 and A5 paper, envelopes, gummed labels, and overhead transparencies. There's even a "face down" output stacker for proper collating, something not available on many laser printers three times the price. The standard 150 page paper tray can be upgraded to 550 pages if you have massive documents to print out.

Software compatibility covers virtually all IBM PC wordprocessors and desktop publishing programs, including Microsoft Word, WPS-PC, Wordperfect, Ventura Publisher and Aldus Pagemaker.

For further information contact Logo Computer Centre, Suite 303 Henry Lawson Business Centre, Birkenhead Point, Drummoyne 2047.


## 8 — 18GHz power dividers

The Norsa model EZZ8324 (8-way) and EZZ8325 (16-way) power dividers cover the 8 — 18GHz frequency range. Both models have isolation of 20dB minimum and output VSWR of 1.5:1 maximum. The units exhibit low values of insertion loss, amplitude and phase unbalance.



Model EZD8324 measures 4.44" x 1.44" x 0.22" and weighs 70 grams. Model EZD8325 is 8.69" x 1.75" x 0.22" and weighs 155 grams. Removable sm female connectors are standard, and hermetically sealed units are available.

For further information contact Scalar Distributors, 20 Shelley Avenue, Kilsyth 3137.

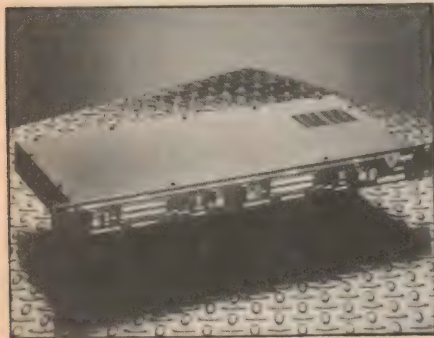

## Audio signal processor

Using state-of-the-art components and a linear integration detection technique, The Leveller is claimed to yield unprecedented level control over audio signals, but with a warm, natural, "sonically correct" sound (i.e., the way the human ear would hear the signal).

The Leveller offers two independent channels that can be coupled for processing stereo information. The balanced, differential input section of each channel is capable of accepting -10dB, 0dB, or +4dB levels, making the device ideal for use by recording engineers, broadcasters, musicians and sound contractors.

Its most useful applications would be in controlling maximum audio levels, limiting vocals and preventing tape saturation.

The Leveller is available as a 2 channel 400 series unit or as a single channel 800 series module for use in PR-24 and PR-10.

For further information contact Amber Technology, Cnr Skyline Pl & Frenchs Forest Rd, Frenchs Forest 2086.

## 32-channel logic analyser

Hewlett-Packard has introduced the HP 1651A logic analyser, with 32 channels of state-and-timing analysis, a simplified pop-up-menu-driven user interface and an Australian list price of \$7,470 before tax.

The new instrument brings general-purpose logic-analysis performance to

the low-priced market. It is designed for engineers involved in the designed and test of 8-bit microprocessor-based systems.

The HP 1651A provides 100MHz transitional timing and 25MHz state analysis on all of its 32 channels. By providing all features on all channels, HP believes this makes the HP 1651A the best value available in the low-priced analyser market.

A simplified, intuitive user interface provides control of the instrument via a front-panel keypad and knob. The number of menu levels is minimised to substantially reduce moving from one menu to another. Front-panel selections are made from pop-up menus that are superimposed on the current display and show the user only valid choices for that field.

A built-in 3 1/2" disk drive provides convenient storage fast recall of instrument setups and measurement results, and a single keystroke can dump the current display to a RS-232C printer for report-quality documentation.

Further information from Hewlett-Packard Australia, PO Box 221, Blackburn 3130.



## Static shielding bags


A range of metallized static-shielding bags released by Rheem Protective Packaging Products is claimed to provide complete protection against electrostatic discharge.

Rheem claims products shipped in Gridstat 9900 bags can be used immediately, without fear of static-induced damage. The bags contain a high performance, conductive grid and a metallized layer sandwiched between sheets of durable, anti-static plastic.

The bags can also be reused. A simple visual inspection is all that is needed to confirm their electrical integrity.

Gridstat 9900 bags are available in 17 different sizes to suit most applications.

For further information contact Rheem Protective Packaging Products, 3 Burrows Road, Alexandria 2015.

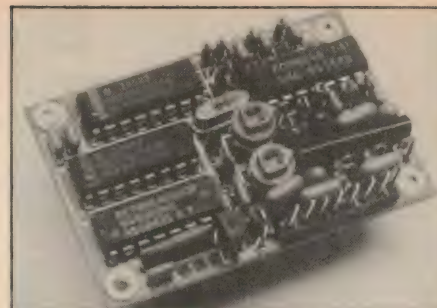

## Low cost duplex scrambler

Measuring just 55mm by 38mm, GSA Technology's new Australian made Mini Scrambler offers speech security at a moderate cost.

Designated model GSA1000, the scrambler has been designed to offer commercial radio users affordable security by providing 8 programmable codes that dictate an audio spectrum "knee-over-point". This gives high recovered audio quality and low cost to the user. The scrambler is also claimed to be very simple to install in a radio or line communications system.

The GSA1000 will be priced under the \$200 point for the end user. This should make it attractive to UHF CB band business users.

## Serial mouse

Developed and made in Japan, the Neos serial mouse combines state-of-the-art technology with Japanese reliability. This is claimed to provide the user with a mouse that is not only easy to use, but highly accurate.


Features include full compatibility with the Microsoft serial mouse, optical encoding to provide superior movement sensing, the use of a silicone coated ball and Teflon feet to provide silent, smooth mouse movements.

For further information contact Alfa-tron, 1761 Ferntree Gully Road, Fern-tree Gully 3156.





<sup>most</sup>  
The Complete Service available  
from any CAD bureau in  
Australia.



### PROFESSIONAL P.C.B.'s

All this —

- Printed Circuit Design
- Photoplotting PC CAD output
- Technical Support

Now this —

- Software for PCB Design
  - Racal-Redac REDCAD
  - Protel-PCB

And —

- Standard Compatible Hardware
  - NEC APC IV
  - COMPAQ Deskpro 386
- Penplotters
- Photoplotters

at your service 15 hrs. a day




R.C.S. Design Pty. Ltd.

728 Heidelberg Road,  
Alphington, Victoria 3078

(03) 49 6404 (03) 49 6792

Fax: (03) 456 4351 (Att. R.C.S.)

## New Products

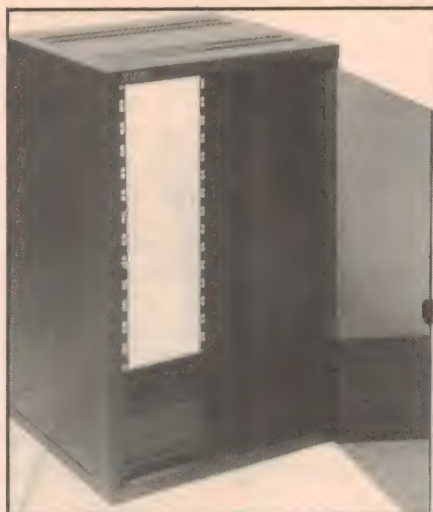

### Australian made 19" racking system

CICB (Australia) has released a new Australian designed and manufactured "Studirac" 19" racking system, claimed to offer considerable advantages to users in the computer, electronics, telecommunications and broadcast industries.

The standard rack is available in 6, 8, 12, 18, 26 and 46 unit heights and a unique connector strip is available to enable expansion to virtually any size as the system requires. Only four components are used to build up the standard rack and the superior interconnection design provides a strength not normally found in the "square tube" type of construction.

The simplicity of the structure also lends itself to the incorporation of such options as CRT monitors, desk tops, etc., and being Australian made, an "ex-stock" situation normally exists.

Additional advantages claimed for "Studirac" include portability and a price level that for the first time, gives professional design strength with real economy.

For further information contact CICB at 58 Bath Road, Kirrawee 2232.

### High speed arc welding robot


Lincoln Electric has announced a new model Hitachi compact 5-axis high speed arc welding robot.

The new model M5030 is a low cost compact and lightweight machine with a wide operating space and easy maintain-

ance. It features controls and software optimised for arc welding, including a genuine operator guidance system for teaching. This means that an operator, with no knowledge about this robot, can operate the robot by simply following the instructions displayed on the teaching box, without the need to resort to complicated manuals.

The M5030 is designed to make installation and operation easy. Its construction is of a non-interference link-type structure and it is able to weld at the level of its own base, thus making it possible to mount the robot (weighing only 100kg) on the same table as the component jigs to which it is to weld. This feature, combined with its separate small controller, make installation almost anywhere.

For further information contact Lincoln Electric, 35 Bryant St, Padstow 2211.

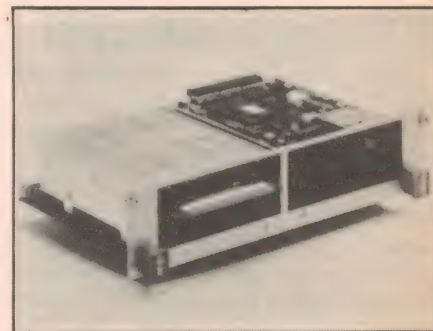

### 3.5" drives on VME board

The Compcontrol CC-93 module has the standard VMEbus double Eurocard format and occupies three slots in a VMEbus card cage. It has a built-in 3.5" 1Mb floppy disk drive and a 3.5" 20Mb Winchester disk drive, with controller.

Both drives are fully SCSI compatible, and have their own ID number on the SCSI bus. Both logical units support the disconnect and reselect commands, for optimal SCSI bus usage and high performance. The SCSI lines are connected to the P2 connector, while the power supply pins of the P1 connector are the only lines used from the VMEbus.

Available modules include the following combinations:

- 1Mb floppy drive and 20Mb hard disk
- 1Mb floppy drive and 40Mb hard disk
- Two 1Mb floppy drives
- 40Mb tape drive and 40Mb hard disk

For further information contact Philips Scientific & Industrial, 25-27 Paul Street North, North Ryde 2113.

### MICRO-EDUCATIONAL P/L

8/ 235 Darby St NEWCASTLE 2300

*Australia's largest computer mail order company.*

# FREE

OUR LATEST LIBRARY DISK FOR YOUR  
**APPLE, IBM, or MACINTOSH**

(Add \$10 for Mac 3.5" disks)

These disks contain the best in  
public domain software.

Send \$2.00 Cheque/Money Order for P & P.

Ask for your **FREE CATALOG**

Dear George,

Please rush me a free library  
disk for my IBM/ APPLE/ MACINTOSH  
(Add \$10 for Mac disks)

Enclosed Please find Cheque/Money Order for \$2.00 P & P.

NAME: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

P/CODE: \_\_\_\_\_



## CCD camera with fibre-optic window

E G & G Reticon announces the introduction of a fibre-optic window version of its MC9128 camera. When the object to be viewed is not accessible using standard imaging optics, a flexible fibreoptic cable coupled to the camera's window can bring in the image sensing data from great distances, tight areas where a camera can't fit, or from areas too large for the image sensor itself.

The light coming into the image sensor can also be intensified by means of a microchannel plate, for low light level operation.

The fibreoptic window has been mounted directly onto the image sensor. The sensor in the MC9128 has a square format of 128 x 128 square elements on 60 micron centres. The fibres measure 6 — 8 microns in diameter and are packed together in a bundle that is larger than the sensitive area of the array.

The MC9128 modular camera is a compact, solid state camera with valuable features: high speed (up to 8MHz); asynchronous operation, accessibility to specific video lines, and a 1:1 aspect ratio.

For further information contact Total Electronics, 9 Harker Street, Burwood 3125.




## TV — microscope coupler

The series 2500-500 TV-microscope couplers connect any black and white or colour closed circuit TV camera to almost any microscope.

The couplers contain well corrected, coated optics and an adjustment knob to bring the TV monitor into focus at the same time the eyepieces are in focus. This "parfocality" control is of great help with a stereo zoom microscope, eliminating the need for drastic re-focusing when the microscope is zoomed to a different magnification.

Having a magnification of 1x, the

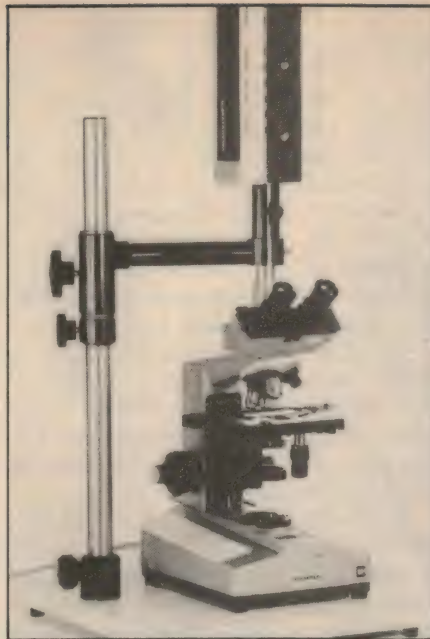

series 2500 coupler is best suited for general microscope usage, covering a large part of the field of view as seen through the eyepieces. The series 5000 has a magnification of 2x and is used when higher magnification is needed to achieve the maximum resolving power of the microscope.

A "C" mount thread that fits most TV cameras is supplied as standard equipment. Other mounts are available on special order.

Further information is available from Warsash, PO Box 217, Double Bay 2028.

## Temperature recorder

The Rustrak Digilog-55 is a new temperature recorder incorporating a liquid crystal display, which provides digital readout as well as hard copy recording. The LCD display eliminates the need for a separate digital indicator and enables the recorded value to be seen at a glance. It is self contained and the large display is readable from 10 feet away minimum.

The recorder is available in five common temperature ranges (0 — 250°F, 0 — 500°F, 0 — 1000°F, 0 — 100°C, 0 — 300°C) and is small, compact and lightweight.

Additional features include inkless, dry writing on pressure sensitive paper and interchangeable gear trains allowing 25 different chart speeds from 1/8"/h (252 days) to 30"/h (25.2h) on a single roll of paper.

For further details contact Technico Electronics, 11 Waltham Street, Artarmon 2064.

stamp for list — Hundreds of other items not listed — Send 40c

# L.E. CHAPMAN

122 PITT ROAD, NTH CURL CURL  
MAIL ORDERS, BOX 156, DEE WHY, NSW 2099  
TELEPHONE 93-1848

## SUPER SPECIAL

### FM STEREO KITS

All three modules supplied are fully assembled and aligned. Circuit diagram supplied.

ONLY \$22

P.P. \$1.90



## SUPER SPECIAL

\$15



### GRAMO MOTOR AND PICK-UP

204V 16-33-45-78  
4 speed includes cartridge stylus turnover. Ideal for recording old 78 records to tape recorders.

P.P. NSW \$3.80 Interstate \$4.50

## RECORD PLAYER CABINET

Solid timber base, hinged perspex lid \$20

P.P. NSW \$5 Interstate \$7 W.A. TAS \$12

## TRANSISTOR TV TUNERS 11 Volt 46300-5 \$15

## POTS

1/2 Meg Switch	\$1.00	2 Meg Ganged 1apped Log	\$1.50
1/2 Meg Single	\$1.50	50K Dual Concentric	\$1.50
25K Dual Ganged Switch	\$1.50	25K TAP 32K	\$1.50
1 1/2 Meg Single	\$1.50	25K	\$1.50
100K Dual Concentric	\$1.50	1/4 Meg Dual Concentric Linear	\$1.50
1/2 Meg Ganged Log	\$1.50	100K Log Switch	\$1.00
2 Meg Linear Ganged	\$1.00	50K Mini 4 for	\$1.00
10K Dual Concentric	\$1.50	10K Mini 4 for	\$1.00
Double Pole Switch	\$1.50	50 Ohm	\$1.50
25K 4 Gang Linear	\$2.00	0.25 Meg Dual Concentric	\$1.00
20K Linear Single	\$1.50	25K Dual Ganged Switch	\$1.50
1 Meg Log Switch	\$1.00	10K Dual Ganged Switch	\$1.00
1 Meg Dual Ganged Log	\$1.00	250K Dual Ganged Switch	\$1.00
10K Sub Mini	\$1.50	1 Meg 1/2 Meg Dual Concentric	\$1.50
50K Sub Mini	\$1.50	1AP 40K Double Pole Switch	\$1.50
50K Log Switch	\$1.00	300 Ohm Linear	\$1.50
250K Linear	\$1.50	1500 Log	\$1.50
100K Log	\$1.50	0.25 Linear or Log	\$1.50
50K Log	\$1.50		

## SPECIAL DUAL VU METERS

\$3 pp \$1

## TOUCH MICRO SWITCHES

4 for \$1

Shielded leads 7ft

3.5 to 3.5 \$1.00 6.5 to 3.5 \$1.00

6.5 \$0.50

## MICRO SWITCHES

5A 250 volt 50c.

## VALVES

6V6 \$10 EF86 \$5

## IF's 455kHz

For valve radios \$1 ea.

## VALVE SOCKETS

7 pin 4 for \$1

## OSCILLATOR COILS 75c

9 pin 4 for \$1

## TAG STRIPS

Mixed 10

## MIXED SWITCHES

12 for \$4.50

## 5 MIXED ROTARY SWITCHES

\$2.50

## MIXED RESISTORS

100 for \$2

all handy values

## CHROME 1/4 PUSH ON KNOBS

10 for \$1

## Dynamic microphone Desk

Type, HI IMP on/off switch

\$4 PP \$1

## SLIDE POT KNOBS

10 for \$1

## TEISCO Ceramic Microphone

\$2 PP \$1

## MIXED CAPACITORS

Fresh stock 100 for \$2

## VALVES

6DO6 \$10.00

6K7 \$5.00

6K8 \$10.00

8" 8 Ohm Speakers

\$5.00

## TV COLOUR CRYSTALS

4433 — 619kHz \$2

## AM/FM Tuning Capacitors

geared drive \$10

## THERMISTERS

4 for \$1

## Power Transformer 240V

225 aside 6.3 \$10

PP \$3.50 Interstate \$5

## SPARK GAPS

10 for \$1

## STICK RECTIFIERS

TV 20 SC \$1 each

## CAR RADIO SUPPRESSORS

4 for \$1

## TRANSISTOR

AD149 \$1 ea

## SLIDE POTS

1 1/2 Meg DUAL

\$1

1 Meg dual

\$2

2 Meg dual

\$1

250K dual

\$1

1K dual

\$1

5K single

50c

250K single

50c

10K single

50c

2 Meg single

50c


25K dual ganged

\$1

stamp for list — Hundreds of other items not listed — Send 40c



## New Products

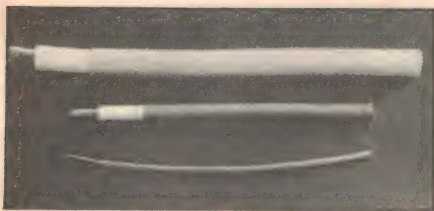

### Silicone insulated cables

A new range of highly specialised silicone insulated cables has been developed in Australia by Elastomer Technologies.

The silicone insulated cables are specifically designed for use in areas of high operating temperatures and have been approved by the Victorian SEC and other electrical authorities for use in 150°, 200° and 220° applications. They are claimed to be the first Australian-manufactured silicone insulated wire cables complying with Australian Standards 3178 and 3171.

An important application area for the cables in medium sizes is by manufacturers of domestic ovens and appliances. However, the company also produces very small, highly flexible cables capable of carrying micro amperages for highly sensitive appliances such as hospital diathermy equipment. Larger cables, from 100 to 350 amps, are also available.

Further information from Elastomer Technologies, 1666 Centre Road, Springvale 3171.



### Midi controlled audio matrix

The Tanktek Master Matrix M4000 series of MIDI controllable audio signal patchers uses electronic switching. The M4100 will route 12 audio signal sources into 16 destinations, while the M4200 expander increases this capability to 24 into 32.

The master matrix boasts a programmable patchbay. The user can store up to 99 different sets of patches, which can be recalled for instantaneous re-routing using either MIDI or manual control. During a mix, for example, the effects set-up can be reconfigured for an instrumental break. These memories are backed up, even when the unit is switched off and packed away, so it is claimed to be as suitable for complex live set-ups as for studio use.

An LCD screen graphically shows the entire interconnection plan, along with a complete set of user-defined equipment names, ensuring that the user is in complete control at every step of the recording process.

Rebel Audio claims that the Tanktek Master Matrix makes real-time patching possible, and brings audio signal routing under real control so that it can now become part of the creative process of music making.

Further information from Rebel Audio, 104 Hampden Road, Five Dock 2046.



### Loss angle bridge

CSD has produced a portable loss angle tangent/capacitance bridge designed to enable site staff to make capacitance and loss tangent measurement of substation components as a routine check on insulation integrity. The bridge is self contained, portable, and has a high level of immunity to electrical interference.

Based around a ratio-arm transformer, the bridge has a working voltage of 600V RMS. The frequency of operation is 80Hz, close to the power frequency, but allowing the phase sensitive bridge

balance detector to be made insensitive to 50Hz interference. The bridge gives the sign of imbalance in capacitance and loss tangent separately, making it quick and easy to use. Particular care has been taken over the design of the filter circuits which drive the meters, to provide a fast response to large out-of-balance signals and a narrow bandwidth to reduce the effects of interference and noise during fine balancing of the bridge.

For more information contact Macey's Electrical Accessories, PO Box 276, Newport 2106.



### EGA version of Paletteplus

Polaroid has introduced a computer image recorder which delivers at-the-desk, high resolution colour prints, slides or overheads, from IBM-compatible personal computers using Enhanced Graphics Adapter (EGA) boards.

The new PalettePlus system, connected to a computer with a EGA or EGA emulating board (21.85kHz sweep) and graphics software with a PalettePlus driver, can produce 640 x 700 pixel hardcopy.

The system also can be used with Colour Graphics Adapter (CGA) or CGA-emulating board-equipped computers.

While the new PalettePlus is capable of producing images with resolutions as high as 920 x 700 pixels, output resolution is dependent on the actual hardware and application software combination used. For example, if the graphics application software used does not have built-in drivers for PalettePlus, image resolution with an EGA-equipped computer will be 640 x 350 pixels.

Further information from Polaroid Australia, Eden Park Estate, 31 Waterloo Road, North Ryde 2113.





## "Quick-assembly" optical encoder

Hewlett-Packard has expanded its motion-control family of products by introducing a new "quick-assembly" optical incremental encoder developed for the high-volume digital-encoder market. Typical applications include printers, plotters, tape drives, positioning tables and automatic handlers.

The HEDS-5500 series encoders require only four steps to complete the mounting and assembly of the device on the motor. No follow-up mechanical or electrical adjustments are necessary to enable operation, and the mounted encoder is insensitive to radial and axial play.

Based on the HEDS-9000 series optical-encoder module, the HEDS-5500 series contains a highly collimated LED light source and an integrated circuit with detectors and output circuitry.

The HEDS-5500 series is available in nine standard resolutions: 96 counts per revolution (CPR), 100 CPR, 192 CPR, 200 CPR, 256 CPR, 360 CPR, 400 CPR, 500 CPR and 512 CPR. Other resolutions may be available on a special basis.

For further details contact VSI Electronics, 16 Dickson Avenue, Artarmon 2064.

## Budget priced FM translator

Sydney FM transmitter and STL manufacturer Radio Transmission Engineering has released a new FM radio translator module as part of its development of the RTE Kikkert studio-transmitter link system. The new FML series translator module is designed around the receive end of RTE's STL.

The module receives the FM parent station programme off-air, retransmitting it unchanged on a separate translator frequency. The system is simple in operation, low cost and saves the expense of providing studio-transmitter link equipment and the expensive associated antenna hardware without

greatly degrading the original programme.

The RTE Kikkert modulation system allows the programme to be retransmitted without demodulation, saving degradation in noise, distortion and stereo quality. The translator will also pass on sub-carrier information for Ancillary Communication Services (ACS — also known as SCA), now becoming popular.

RTE's Euroframe racking module can be used as a 30 watt stand alone self-powered device, or coupled to FM amplifiers of 100, 300 or 500 watt or larger power outputs.

Further information is available from RTE, 179 Military Road, Guildford 2161.



## Locally made lab analyser

TPS has released the new Model 440, a multi-purpose multi-range digital Laboratory Analyser for electrochemistry made in Australia. It measures pH, conductivity, salinity, temperature, dissolved oxygen and millivolts. It can also be used to measure oxidation-reduction potentials (REDOX) and specific ions.






By combining the electronics of separate instruments into a single package, major cost savings have been made without sacrifice of accuracy or stability of measurements. The cost-benefits of the 440 are said to be high for laboratories requiring a wide range of instrumentation facilities, especially where some of these may only be occasionally used.

The analyser is designed for ease of use; the digital display shows the range of operation to eliminate operator errors. Automatic temperature compensation is provided where necessary.

The 440 can also be fitted with an RS-232C computer interface. This allows recording of data by any mainframe or personal computer provided with an RS-232 port and suitable software.

Further information from TPS, 4 Jamberoo Street, Springwood 4127. ☎

# JAPANESE SEMICONDUCTORS



A comprehensive range of Japanese transistors and IC's to suit television, VCR and audio products.

Brands stocked include SANYO, HITACHI, TOSHIBA, NEC, MATSUSHITA, SANKEN RHOM, etc.

We are catering for the repair industry.

Phone for a comprehensive stock list.

## TRADE AND WHOLESALE ENQUIRIES

Phone or send your business details to:

WES Components,  
P.O. Box 451,


Ashfield 2131.

PH: 797 9866 FAX: 799 7051


## RETAIL ENQUIRIES

Wagner Electronics,  
305 Liverpool Rd,  
Ashfield 2131.

PH: 798 9233





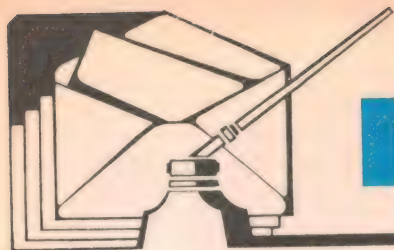

# Information centre

## Radio data link

I would like to connect two computers together using a radio link. Do you know of any project that will allow me to do this, or of any project that I could adapt for this purpose.

The requirement is a two way radio link (half duplex) using RS232 connection. The physical link and circuitry is the only concern. The data communication will be provided by software at both ends. (R.M., Bondi NSW)

• *While it is technically feasible to connect two computers via a radio link, there are important legal considerations which need to be taken into account. To put it simply, before a radio transmission of any kind can be made, a licence must be obtained from the Department of Transport and Communications (DOTC).*

One of these licences is an Amateur Radio Licence, which allows transmission of many different modes (including digital modes) on a wide variety of frequencies. Radio amateurs around Australia (and indeed, around the world) are already experimenting with packet radio, an error-correcting digital communications system which allows messages to be passed between specified stations, via intermediate stations if necessary. The only catch is, an Amateur Licence does not permit business or commercial communications of any kind, nor is it permissible to encrypt the data in any way to hide its meaning. For further details you could contact the Wireless Institute of Australia or the DOTC.

## 60/60 amplifier

I have intermittent trouble with my 60/60 Playmaster, which I believe to be earth loops around the tone circuit. Severe crackling, hissing and degradation of signal in the right channel appeared at first to be caused by components soldered onto the front track of the board, the right track (although it is shown as the left track on page 35 of the July 1986 issue, touching the upturned portion of the metal case. After covering this edge with a nylon cover strip, the amp worked well until the front panel and lid were replaced.

Because the case bolt holes did not line up exactly with the face-plate, the bolts cut into the paint on the face-plate and contacted the metal causing the face-plate to earth.

Similarly, paint chips on the lid and non-alignment of holes, have caused, I believe, the lid to earth. The case, supplied by Jaycar is really of poor design and badly made.

The problem only occurs when the tone defeat button is out (tone controls in circuit). As a matter of interest, both IC3's have been replaced.

Could you tell me if the front panel and the lid are supposed to be earthed and if so, by what means. On the other hand, how can these items be satisfactorily isolated? (R.N.A., North Epping NSW)

• *It is standard practice in amplifier designs to connect the PCB ground to the chassis at only one point (in this case the earth lug near the transformer). If this system is not adhered to, all sorts of "gremlins" will appear, as you have found.*

Conversely, leaving parts of the chassis ungrounded will compromise the safety standards of the amp, and may also lead to hum or RF pickup in the circuitry.

It is generally assumed that the panel fastening screws will "bite" into the chassis when tightened, providing continuity. So all of the case metalwork should be grounded, but the only connection to the PCB ground should be that via the earth lug.

## Video fader

In the January 1986 issue you published an article for the construction of a Video Fader. For the assembly of this fader I had to use a self-made PCB, because I could not get a professional one here in Adelaide.

The operation of the fader appears to be satisfactory, with one little drawback: the picture of the receiving VCR shows on the tape — and on the monitor — two broad "misty" horizontal stripes in the lower half of the picture.

Can you assist me to find a way for eliminating the stripes? (E.B., Highbury SA)

• *The stripes are probably caused by the vertical sync, which is somehow*

*appearing in the video in a delayed version. We suggest that you check the sync-stripper circuitry (Q8, Q9 and IC1a) and the sync-restoration (Q4, Q5). You should check whether there is an "echo" of the vertical sync, then trace back the source of the echo and eliminate it.*

## MOSFET amplifier

I built the Playmaster MOSFET amplifier of January 1981 and both channels worked fine. Then one day when I was listening to music, the right channel dropped out — that is, it stopped working. The fault was blown fuses in the right channel.

The reason for this was a 0.1uF capacitor had developed a short. I am not sure which capacitor it was, but it was one of the two capacitors across the output MOSFETs.

I repaired the faulty capacitor by replacing it with a new one. Then I developed a new problem with the amplifier.

When I fired up the amplifier as per the instructions given, I found that both channels of my 50V line were fluctuating between about 30V and 50V. This showed up on a multimeter. I intend to replace all four 2500uF/63V electros in the power supply with new ones, but here in Perth the only caps I can get are 2200uF/63V. Would these work in this circuit? (G.J.H., Tuart Hill WA)

• *The problem with the 0.1uF capacitors in your Playmaster MOSFET Amp may be due to overheating. These capacitors, as supplied by some retailers, seem to have a low heat tolerance and can sometimes develop a short circuit immediately after soldering. In your case they may have been slightly overheated during the soldering process, and the operating heat of the amplifier finished them off.*

*The only other possibility we can suggest is that one channel of your amp may be oscillating at a supersonic frequency, and perhaps blocking. This might explain the supply rail fluctuations, too. You'd need a scope to track down the cause of the oscillations, if this is the case.*

*We're not sure why you want to replace the electros, but having to*



install 2200uF capacitors instead of the 2500uF as specified is not a serious problem. The current capacity of the power supply will be slightly reduced, lowering the available output power into (mainly) 4 ohm loads.

## IR remote control

Again I am writing to you with problems with my infrared remote TV sound control (January 1983). I went to Dick Smiths at Tighes Hill, Newcastle yesterday and they pointed out the main source of my trouble. I had installed all the transistors the wrong way. I had used their semiconductor outlines in their catalogue instead of the ones you provided with the circuit.

I bought some new transistors and installed them correctly. The circuit now works but I have to hold the transmitter only two inches away — any further and it will not work. Also if the freezer cuts in or out, or I turn the fluorescent light above my work bench on or off the circuit drops the volume level right down low.

I have not replaced the ICs in the transmitter. Should I? (R.A.G., Hawks Nest NSW)

• **Your very low sensitivity could be due to reverse polarity for the BPW50 photodiode, or perhaps reversed connections for the 10uF or 100uF capacitors on the supply line to the diode and preamp.**

*Interference from the fluorescent light could be due to a problem in the input filter circuit (Q2, Q3 and associated components), which may also account for the lack of sensitivity — so you should check this area of the circuit too.*

*The interference is most likely to be caused by "spikes" on the mains caused by the light or fridge switching on or off. You could also try installing small value tantalum capacitors (say 1uF) close to the regulator, one between input and ground and the other between output and ground.*

## Lamp saver

Would you please advise if the Lamp Saver of June 1986 can be upgraded for loads of up to 400 or 500 watts. I wish to use the unit for home unit external security lighting.

Please also advise if the existing circuit or any upgraded circuits you advise can be used with fluorescent lights. (B.G., Ashfield NSW)

• **We see no reason why the Lamp Saver cannot be upgraded to handle**

**higher power loads. The SC141D triac may easily be replaced by the SC151D version, which will handle a much higher current. The main PCB tracks may need to be widened to handle this extra current. Please note that we have not attempted this type of modification, so you may have to experiment a little to achieve the desired results.**

## Notes & Errata

**HEADPHONE AMPLIFIER FOR CD PLAYERS** (July 1987, File: 1/SA/78): Although the mains wiring is correctly referred to in the text and diagrams of this article, the colours mentioned for active and neutral are reversed. The Active wire connecting to the switch should be brown, and the Neutral wire (direct to the transformer) should have been shown as blue.

## Silicon Valley

*Continued from page 47*

Sculley can't believe what he is hearing, temporarily losing his composure for the first time since he was a little boy. He blasts back: "I made a mistake in treating you in high esteem. I don't trust you, and I won't tolerate a lack of trust."

The confrontation comes down to a "he's-out-or-I'm-out" and each of Apple's stunned executives is forced to choose sides. To the visible shock of Jobs, the executives, one by one, voice their support for Sculley. "I love Steve, but I respect John," says Del Yocam, head of the Apple II division, as he indicates his support for Sculley. Jobs can't believe what he's hearing. He bolts from the boardroom, his eyes glistering.

## Electronic Fuse

*Continued from page 79*

With the fuse reset and the current control set to 0.5A and the power supply still set for 0.5A, the trimpot can be adjusted so that the relay just operates. The 10A range should not need adjustment, once calibrated.

If you do not have a current limited power supply, the unit can be calibrated by using a power source capable of supply 1A. All that is needed is a resistor and a voltmeter (or current meter). The resistor value will depend on the voltage available. Current = voltage/resistance.

So, for a 12V battery, the resistor

*The circuit itself is not suitable for use with fluorescent lamps, but we described an electronic starter for fluorescent lamps in the October 1982 issue. This unit was designed to prevent flickering and increase lamp life. Copies of the project article are available from this office at a cost of \$4, which includes postage and handling.*

**EIGHT-CHANNEL IR REMOTE CONTROL** (July 1987, File: 2/MC/24&25): The component overlay on page 25 should show the Mute relay as RLA10, its associated diode as D19, and the ON/OFF relay as RLA9. Also, the link shown above IC7 is incorrect. If required, the link is connected from the pin 6 (IC6) pad, to one of the nearby three D latch pads, depending on the options chosen.

The next day, Jobs still can't believe he's lost all control of his own company. He even offers Sculley his title of chairman, in exchange for Sculley's presidency. Sculley refuses. A few days later, Jobs signs the necessary papers that made his departure official.

Surely nothing has come out of Hollywood since "One Flew Over the Cuckoo's Nest" that can beat that kind of action. Yet it all happened that way, at least according to John Sculley in his new book: "Odyssey: Pepsi to Apple: which has just gone on sale in the US."

Still remains the question what would have happened if Gassee hadn't known and Sculley would have been canned. We'll never know for sure. What we do know is that Apple's shares at the time were trading in the \$US10-15 range. Today they are worth around \$US100 each...

needed would be 24 ohms to give 0.5 amps. Or for a 10V supply and a 22 ohm resistor the current would be 0.45 (Note the power rating of the resistor would be  $10 \times 0.45 = 4.5$  watts).

**Special Note:** The electronic fuse is only designed to replace conventional fuses, and not to be a lab standard! An advantage over conventional fuses, however, is the reaction time. In the fast blow mode as soon as the threshold is reached it only takes milliseconds to switch off, not seconds as for fuses. So your delicate semiconductor will get much better protection.

In the slow blow position it takes about 2 seconds to react.



# 50 and 25 years ago...

"Electronics Australia" is one of the longest running technical publications in the world. We started as "Wireless Weekly" in August 1922 and became "Radio and Hobbies in Australia" in April 1939. The title was changed to "Radio, Television and Hobbies" in February 1955 and finally, to "Electronics Australia" in April 1965. Below we feature some items from past issues.



November 1937

**Gigantic PCJ aerial scheme:** An interesting engineering feat has recently been carried out by Philips engineers at PCJ, consisting of a remarkable aerial system which will enable the station to switch its beam from one part of the world to another in a matter of a few moments — simply by revolving the complete two-masted aerial structure.

**Television not attractive:** Notwithstanding that television was for the first time displayed at this year's Radiolympia's

radio show in London, the attendance was disappointing, about 36,000 less than last year, and one of the lowest figures on record. The public appears to be becoming indifferent to radio and especially to technical advances. A sorry prospect for the radio industry.



November 1962

**A 24-hour hook-up:** The next generation of communication satellites — the kind that will provide continuous 24-hour-a-day television programming rather

than brief periodic broadcasts — is already in the making under a Government space contract awarded to Hughes Aircraft Company.

Only one of the new spacecraft will be needed to link the four continents of North America, Europe, South America and Africa into a vast communications network operating around the clock, according to Dr Allen E. Puckett.

**Solar energy:** Solar energy, in which France has taken the European lead, will be commercially feasible for certain uses by 1965. By then the centre Nationale de Recherche Scientifique's new oven at Odeillo, in the eastern Pyrenees, will be in operation. It is claimed to be the largest in the world.

**Braking Failure:** An instrument giving visible warning to drivers of any defect in the braking system has been developed by an Israeli engineer.

The instrument can be used on any motor vehicle having an hydraulic braking system. It gives drivers early warning of any oil leakage in the braking system, however small, by means of a lamp on the instrument panel and shuts off the flow of oil to any part of the system where a serious leakage is taking place.

## NOVEMBER CROSSWORD

### ACROSS

1. Early source of electrochemical energy. (9,4)
10. RAAF aircraft. (7)
11. Said of certain liquid crystals. (7)
12. Computer data unit. (4)


13. The — particle may be detected in radioactive decay. (5)
14. Prefix indicating value of  $10^{15}$ . (4)
17. Notes and —, an EA department. (6)

19. Capable of effectively reproducing sound. (8)
21. Use working replica to represent another situation. (8)
22. TV adjustment. (6)
25. Part of raster. (4)
26. Automation. (5)
27. Person operating a computer. (4)
31. Complete a telephone circuit. (7)
32. Atlas, Titan, Blue Streak, etc. (7)
33. Said of a satellite with a "fixed" position. (13)

### DOWN

2. Printer's type style. (5)
3. Radiation seen over the horizon. (4)
4. First name of Tesla. (6)
5. Portable. (4-4)
6. Focussing aberration. (4)
7. Eavesdropper for the rubbish-dropper? (9)
8. Mains wire. (6)

### SOLUTION FOR OCTOBER



9. Range of frequencies. (6)
15. Specification for output of printer. (5)
16. Force units in c.g.s. system. (5)
18. Residual magnetism. (9)
20. Ore of strontium. (8)
21. Join tape. (6)
23. Rocket variable. (6)
24. Inventor of the planar process. (6)
28. Lateral force. (5)
29. Cyclotron components. (4)
30. Sweep with a beam, etc. (4)



# Own An Inphone And Your Neighbours Will Be Green With Envy Here's Why

**Its Completely Mobile** The Go Anywhere Cordless Inphone is not tied to the wall with wires — you simply take it where you want. Never again need you spend half the night crouched around the kitchen bench or draughty hallway with those long winded calls.

★ **Use It By  
The Fireside In Your  
Favourite Chair**

★ **Super Handy  
When Sunbaking  
By The Pool**

**You Can Use The  
Inphone Handset Up To  
250 Metres From  
The Base Unit**

**INPHONE** is quite simply the finest cordless phone available. No other cordless phone has the quality, security and the features at any where near an affordable price of INPHONE.

**AT HOME** you can keep in touch around the swimming pool. (Please note the equipment is not waterproof). In the garden. Under the car. While watching T.V. In the bathroom. In Bed. Or next door when you're playing cards or having a Barbecue with your neighbours.

**IN BUSINESS** a busy executive can take the INPHONE around the factory, warehouse, showroom, sales yard or construction site or into the car park, and not miss a deal! Also INPHONE is ideal for use in restaurants.

**IN SPORT** on the field or track, the gym, around the swimming pool, Lifesavers on the beach etc.

**Comprehensive 6 months  
Warranty**

**Brilliant  
Performer**



★ **No  
Installation  
Costs**  
Simply Plugs  
Into Your  
Phone Socket

★ **Inphone Is  
Great Around The  
Factory or Building  
Site**

**Special  
Price To  
EA Readers  
This Month**

**Why Pay  
\$329?**

**INPHONE  
ALTRONICS  
FANTASTIC  
CHRISTMAS PRESENT**

**Normally Great Value At \$269**  
**Exclusive Offer To Readers Of Electronics Australia**  
**This Month \$199 — But You Must Mention This Advert**  
**When Ordering**

**We Regret This Special Offer May Not Be  
Available From Altronics Dealers**

**\$199**



# EA marketplace EA marketplace

## ADVERTISING RATES FOR THIS PAGE

SMALL ADS: The minimum acceptable size of 2 centimetres x one column costs only \$40. Other sizes up to a maximum of 10 centimetres are rated at \$20 a centimetre. CLASSIFIEDS: \$4 for 40 letters. Just count the letters divide by 40 and multiply by \$4, ROUND UP TO NEAREST WHOLE NUMBER. CLOSING DATE: Ads may be accepted up to the 18th of the month two months prior to issue date. PAYMENT: Please enclose payment with your advertisement. Address your letter to THE ADVERTISING MANAGER, ELECTRONICS AUSTRALIA, PO BOX 227, WATERLOO, NSW 2017.

### FOR SALE

#### AMIDON FERROMAGNETIC CORES:

Large range for all receiver and transmitter applications. For data and price list and 105X220 SASE to: R. J. & U. S. Imports, P.O. Box 157, Mortdale, N.S.W. 2223. N.S.W.: Geoff Wood Electronics, Lane Cove. Webb Electronics, Albury. A.C.T.: Electronic Components, Fyshwick Plaza, Vic.: Truscott Electronics, Croydon. W.A.: Willis Trading Co., Perth.

**EX-ABC AUDIO TAPES:** 1/4" wide on 10 1/2" Standard metal spool \$6.85. Robust metal spool \$12.85 7" spool \$2.85. 5" spool \$1.25. Post extra. Also in stock 1/2", 1" and 2" tapes. Waltham Dan, 96 Oxford St., Darlinghurst, Sydney. Phone (02) 331-3360.

**REALISTIC DX200:** Band Communications Receiver, 150KHz 30MHz bandspread AGC variable BFO 500 KHz marker for calibration of main and bandspread tuning. 4/14 Gretel Close, Nelson Bay. Ph: (049) 81 3907 \$150.

**BACK ISSUES:** EA & ETI 1956 to 1986. Offers to P.O. Box 102, Campbell 2601.

**VECTORSCOPE & WAPHONE MONITOR:** Matched pair, excellent professional model, made by Systems Video England. \$3,850 for both, will split. Phone Ross (07) 801-1321.

**VZ USERS:** Short basic program saves binary tapes to tape AND disk. Send \$5 to P. Brennan, P.O. Box 334, Mordialloc 3195.

**Build the AEM MARCH 87:** STAR PROJECT 256K printer buffer and save hundreds of dollars on the cost of any commercially available unit. Double sided board, Eprom & inst. \$39 plus \$3 P&P. Optional boards to suit buffer include Serial converter board @\$18, Printer switch @\$18, and computer switch @\$12 IBM type printer cables \$15 plus \$3 P&P. Components also available. For more info. Send SAE to Don McKenzie, 29 Ellesmere Cres, Tullamarine 3043.

**NEW RADIO VALVES:** For entertainment or industrial use. Waltham Dan, 96 Oxford St., Darlinghurst, Sydney. Phone (02) 331-3360.

**2N3055 90c ea:** 10 for \$8. BD139 30c ea, 10 for \$2.50. BC548, 549 15c ea. P&P free. Send for list. L.M.F. Products, PO Box 384, Cootamundra 2590.

**Electronic Australia 1976-86:** American Scientific 1962 to 86, 100 speakers all shapes and sizes 2" to 8", 1000 T.V. valves. Any bulk offer considered. Ring (02) 398-5005.

**EXPERIMENTERS COMPONENT PACK:** Eproms, IC's, sockets, switches, caps, condenser mic's, etc. GOOD VALUE \$20 inc. postage. Send M/O to S. Burr, P.O. Box, 34 Cannon Hill, Qld 4170.

### WANTED

**"NORTHSTAR ADVANTAGES:** Wanted to buy — Robert Armstrong, P.O. Box 263, Toronto 2283. (049) 59-2400.

MUSIC SOUND RECORDING STAGE LIGHTING

# SONICS

MAGAZINE

For: Musicians, Road Crews, Recording Engineers, Lighting People, Managers, Promoters and anybody interested in what goes into today's music-making.

THE ALL AUSTRALIAN MUSIC MAKERS' MAGAZINE

#### PRINTED CIRCUIT BOARDS

Minimum postage & packaging on all EA & ETI Project PCBs

Catalogue 1976-85 (inc components) \$1.50. PCBs made to order — 48 hr prototype service. Bankcard/Mastercard.

Acetronics PCBs  
112 Robertson Rd. Bass Hill 2197  
(02) 645 1241

#### A NEW CONCEPT FOR LOW VOLTAGE PROJECTS

**COPPER FOIL TAPE:** thin pure copper tape backed by special hi-tack adhesive. Current carrying capacity, 5 amps, FULLY TESTED at 24V 5A. Not recommended for mains voltage.

4mm...RRP \$8.03 6mm...RRP \$9.84 33 metre rolls

GIFFORD PRODUCTIONS  
PO Box 62, St Kilda, Vic 3182. (03) 534 3462

#### RCS.RADIO PTY. LTD.

Established 1933  
IS THE ONLY COMPANY  
WHICH MANUFACTURES AND  
SELLS EVERY PCB & FRONT PANEL  
published in EA and ETI  
651 Forest Road Bexley 2207  
AUSTRALIA  
RING (02) 587 3491 FOR INSTANT PRICES  
24 HOUR TURNAROUND SERVICE

## Do computers play any part in your life?

If they do — or if you just want to find out about them — don't miss each month's issue of

# your computer

NEWS

REVIEWS

PROGRAMS

TUTORIALS

A magazine for all computer users and enthusiasts, Your Computer has something for everyone — topical features on all aspects of the computing world, expert reviews of the latest software and hardware, up-to-the-minute information for business people and even games and advice for hobbyists.

**Available at your Newsagent now!**



# Ideal CHRISTMAS Gifts

## HOW TO DESIGN ELECTRONIC PROJECTS

**R. A. Penfold** **BP0127**  
The aim of this book is to help the reader to put together projects from standard circuit blocks with a minimum of trial and error, but without resorting to any advanced mathematics. Hints on designing circuit blocks to meet your special requirements where no "stock" design is available are also provided. **128 pages \$9.00**

## ELECTRONIC MUSIC PROJECTS

**R. A. Penfold** **BP0074**  
Provides the constructor with a number of practical circuits for the less complex items of electronic music equipment, including such things as fuzz box, waa-waa pedal, sustain unit, reverberation and phaser units, tremolo generator, etc. The text is divided into four chapters as follows: Chapter 1, Guitar Effects Units; Chapter 2, General Effects Units; Chapter 3, Sound General Projects; Chapter 4, Accessories. **112 pages \$9.50**

## ELECTRONIC SECURITY DEVICES

**R. A. Penfold** **BP0056**  
Many people associate the term "security device" with only burglar alarms of various types, but in fact, any piece of equipment which helps to protect people and property against any form of danger could be termed a "security device". Therefore this book, besides including both simple and more sophisticated burglar alarm circuits using light, infra-red and ultrasonics, also includes many other types of circuits as well, such as gas and smoke detectors, flood alarms, doorphone and baby alarms, etc. **112 pages \$9.50**

## AN INTRODUCTION TO Z80 MACHINE CODE

**R. A. & J. W. Penfold** **BP0152**  
Takes the reader through the basics of microprocessors and machine code programming with no previous knowledge of these being assumed. The microprocessor dealt with is the Z80 which is used in many popular home computers and simple programming examples are given for Z80-based machines including the Sinclair ZX-81 and Spectrum, Memotech and the Amstrad CPC 464. Also applicable to the Amstrad CPC 664 and 6128. **114 pages \$10.00**

## COIL DESIGN AND CONSTRUCTION MANUAL

**B. B. Babani** **BP0160**  
A complete book for the home constructor on "how to make" RF, IF, audio and power coils, chokes and transformers. Practically every possible type is discussed and calculations necessary are given and explained in detail. All mathematical data is simplified for use by everyone. **96 pages \$9.50**

## END OF LINE Priced to Clear LIMITED STOCK

### A TV-DXERS HANDBOOK

**R. Bunney** **BP0176**  
Completely revised and updated by Roger Bunney who is probably one of the leading authorities in this country on the subject. Includes many units and devices which have been designed and used by active enthusiasts, and often, considerable ingenuity and thought have gone into the development of such units to overcome individual problems.

A practical and authoritative reference to this unusual aspect of electronics. (Large Format) **\$18.00 \$14.00**

### USING YOUR AMSTRAD CPC DISC DRIVES

**J. W. Penfold** **BP0189**  
Covers such things as tracks, sectors and formatting, AMDS and CP M operating systems including rules and regulations, filing from BASIC, file copying and transfer, program development including MERGE and CHAIN MERGE, CP M turnkey discs etc. **\$11.00 \$9.00**

96 pages

### 25 SIMPLE AMATEUR BAND AERIALS

**E. M. Noll** **BP0125**  
This concise book describes how to build 25 amateur band aerials that are simple and inexpensive to construct and perform well. The designs start with the simple dipole and proceed to beam, triangle and even a mini-rhombic made from four TV masts and about 400 feet of wire. You will find a complete set of dimension tables that will help you spot an aerial on a particular frequency. Dimensions are given for various style aerials and other data needed for spacing and cutting phasing lengths. Also included are dimensions for the new WARC bands.

80 pages **\$6.50 \$5.00**

## HOW TO GET YOUR ELECTRONIC PROJECTS

### WORKING

**R. A. Penfold** **BP0110**  
The aim of this book is to help the reader overcome problems by indicating how and where to start looking for many of the common faults that can occur when building up projects.

Chapter 1 deals with mechanical faults such as tracing dry joints, short-circuits, broken P.C.B. tracks, etc. The construction and use of a tristate continuity tester, to help in the above, is also covered. Chapter 2 deals with linear analogue circuits and also covers the use and construction of a signal injector/tracer which can be used to locate and isolate the faulty areas in a project.

Chapter 3 considers ways of testing the more common components such as resistors, capacitors, op amps, diodes, transistors, SCRs, unijunctions, etc., with the aid of only a limited amount of test equipment.

Chapter 4 deals with both TTL and CMOS logic circuits and includes the use and construction of a pulse generator to help fault-finding. **96 pages \$8.50**

## A Z-80 WORKSHOP MANUAL

**E. A. Parr** **BP0112**  
This book is intended for people who wish to progress beyond the stage of BASIC programming to topics such as machine code and assembly language programming, or need hardware details of a Z-80 based computer. **192 pages \$12.00**

## ELECTRONIC CIRCUITS FOR THE COMPUTER CONTROL OF ROBOTS

**R. A. Penfold** **BP0179**  
Provides information and circuits on computer control of electric motors (including stepper types), plus a range of useful sensors including visible light, infra-red, and ultrasonic types. **96 pages \$11.00**

## IC 555 PROJECTS

**E. A. Parr** **BP0044**  
Every so often a device appears that is so useful that one wonders how life went on before without it. The 555 timer is such a device. Included in this book are basic and general circuits, motorcar and model railway circuits, alarms and noise-makers as well as a section on the 566, 568 and 569 timers. **176 pages \$9.50**

## HOW TO DESIGN AND MAKE YOUR OWN P.C.B.s

**R. A. Penfold** **BP0121**  
Chapter 1 deals with the simple methods of copying printed circuit board designs from magazines and books and covers all aspects of simple P.C.B. construction as comprehensively as possible. Chapter 2 covers photographic methods of producing p.c.b.s and Chapter 3 deals with most aspects of designing your own printed circuit board layouts. **80 pages \$6.50**

# BABANI BOOKS Best Sellers



## ELECTRONICS BOOKS ORDER COUPON

For airmail outside Australia  
add \$5.00 to these charges.

(If insufficient space enclose separate list)

BOOK TITLE	BOOK NUMBER	QTY	PRICE

Send to:  
**Freepost No.4**  
**Federal Publishing**  
**PO Box 227**  
**Waterloo 2017** (no stamp required)

Total Price of Books .....\$  
Plus post & handling .....\$ **2.75**  
(flat rate up to 10 books)  
**TOTAL\$**

Date: .....

Name: ..... Telephone: .....

Address: ..... Postcode: .....

Please tick box to indicate method of payment: **Cheque** \* / Money Order ☐

\*Please make payable to the Federal Publishing Company Pty. Ltd.

☐ Mastercard ☐ Amex ☐ Diners ☐ Bankcard ☐ Visa ☐ American Express

Credit Card No:

Signature ..... Expiry Date .....

Unsigned orders cannot be accepted

EA NOV '87



# Next month in

# Electronics Australia

## The Powerhouse

Here it is at last — a 12V/240V AC inverter with real guts! A full 600W output, to power those bigger appliances. Easy to build, and quite reasonable in cost...

## Jogger Logger

How far did you jog this morning — 3km or 5km? It's hard to judge, isn't it? Not to worry, here's an easy to build project that counts your strides and lets you work it out.

## A closer look at DAT

The new digital audio tape recorders are fantastic — we've just had the opportunity to try one out! Too late for this issue, so we'll tell you all about it next month.

*\*Note: although these articles have been prepared for publication, circumstances may change the final content.*

## Electronics Australia Reader Services

"Electronics Australia" provides the following services:

**Subscriptions:** All subscription enquiries should be directed to: Subscriptions Department, Federal Publishing Co. PO Box 227, Waterloo 2017. Phone: (02) 693 6666

**BACK ISSUES:** Available only until stocks are exhausted. Price: \$4.50

**PHOTOSTAT COPIES:** When back issues are exhausted, photocopies of articles can be supplied. Price: \$4.50 per project or \$9 where a project spreads over several issues.

**PCB PATTERNS:** High contrast, actual size transparencies for printed circuit boards and front panels are available. Price: \$5 for boards up to 100 square centimetres; \$10 for larger boards. Please specify positive or negative.

**PROJECT QUERIES:** Advice on projects is limited to postal correspondence only, and to projects less than five years old.

Price: \$5. Please note that we cannot undertake special research or advise on project modifications. Members of our technical staff are not available to discuss technical problems by telephone.

**OTHER QUERIES:** Technical queries outside the scope of "Replies by Post", or submitted without fee, may be answered in the "Information Centre" pages at the discretion of the Editor.

**PAYMENT:** Must be negotiable in Australia and made payable to "Electronics Australia". Send cheque, money order or credit card number (American Express, Bankcard, Mastercard, or Visa Card), name and address (see form). All prices include postage within Australia and to New Zealand.

**ADDRESS:** Send all correspondence to The Secretary, "Electronics Australia", PO Box 227, Waterloo, NSW 2017.

Please note that we are unable to supply back issues, photocopies or PCB artwork over the counter.

Back Issues .....

Photostat copies .....

Total price of magazines/photocopies, including postage and handling.

No off issues reg ..... x \$4 = \$.....

Cheque/Money Order ☐ Please tick box to indicate method of payment:

\*Please make payable to the Federal Publishing Company Pty Ltd.

Mastercard American Express ☐ Visa ☐ Bankcard ☐ Tick ☒

Card Expiry Date .....

Credit Card No.

Signature  
(Unsigned Orders cannot be accepted)

NAME: .....

ADDRESS: .....

POSTCODE .....

## ADVERTISING INDEX

Ace Radio .....	109
Acetronics .....	144
Altronics .....	80-87, 143
Audio Engineers .....	47
Aust. Calibrated Laboratories ..	116
Aust. Govt. RAAF .....	30-31
Aust. Maritime College .....	121
Austronics .....	21
Avtek .....	9
Bell IRH .....	106
Chapman L E .....	137
C H Smith .....	117
Crusader .....	43
David Reid .....	34
Dick Smith Electronics .....	44,45,93-98
Duet .....	29
Electronic Brokers .....	73
Elmeasco .....	IFC
Ellistronics .....	105
Emona .....	20
Federal Publishing .....	IBC,79,101,136,145
Geoff Wood .....	102
Gifford .....	144
Hi-Tech Software .....	29
Icom .....	14
Jaycar .....	56-63
Kenelec .....	69
Kepic .....	72
Macro Dynamics .....	79
Micro Educational .....	136
NSD .....	55
Pioneer Marketing .....	15
RCS Design .....	136
RCS Radio .....	144
Ritronics .....	35-37,110,111,131
Royston .....	43
Scientific Devices .....	101
Scope .....	24
Sheridan .....	74,75
Sydney County Council .....	73
Tandy .....	125
Vicom .....	128
VSI .....	OBC
WES Components .....	139

This index is provided as an additional service. The publisher does not assume any liability for errors and omissions.



# Super subscription offer

## Win this mighty Daihatsu Rocky

*Including options fuel-injection, air-conditioning,  
sun-roof and more!*

**Valued at  
over  
\$27,000!**



**In 4WD there's only one way to go . . . Go Rocky!**

**Subscribe Now and  
Receive 12 issues of**

**Electronics  
Australia**

**for just \$42.00**

**Electronics Australia** is the biggest and most widely read technical publication in the country. It is essential reading for engineers, technicians and hobbyists.

**Electronics Australia** reviews the latest technology, and regularly tests computers, and high fidelity equipment.

### Plus . . .

Your name goes in the draw for this Daihatsu Rocky loaded with options valued at \$27,000! It's the 4WD designed to meet, and beat, Australia's toughest conditions.

### It includes . . .

3 way adjustable suspension and 5 speed manual gearbox provide the economy and driveability you would expect from Australia's leading 4WD. And it comes with options including fuel-injected engine, air-conditioning, power steering, towbar, bullbar, long wheel base and resin top sunroof.

### Wow!

### And . . .

if you act now you also receive a bonus leatherette travel alarm clock absolutely free. It's the ideal companion for any traveller. The LCD readout gives the time, date and an effective alarm. Lightweight and compact, it folds away for use in a briefcase or handbag. It's compact and stylishly finished.

**(Valued at over \$10.00)**

**FREE**

**ACT  
NOW!  
and receive this  
bonus clock free!**



Simply fill out the details on the enclosed self-sealing postage paid coupon/envelope or send your cheque/money order with personal details to Daihatsu Rocky Offer. Your subscription will automatically enter the draw.

\*Chrome wheels and chrome bumpers do not come as standard on the winning vehicle.

**Freepost No. 4, P.O. BOX 227, WATERLOO, NSW 2017.  
No stamp required.**

#### CONDITION OF ENTRY

1. The competition is open only to Australian residents authorising a new/renewal subscription before last mail December 31st, 1987. Entries received after this date will not be included in the draw. Employees of The Federal Publishing Company, Daihatsu Australia Pty. Ltd. or their families are not eligible to enter. To be valid for drawing, subscription must be signed against a nominated valid credit card or, if paid by cheque, cleared for payment.
2. South Australian residents need not purchase a subscription to enter, but may enter once only by submitting their name and address on a hand drawn facsimile of the

subscription coupon to the Federal Publishing Company, PO Box 227, Waterloo, NSW 2017.


3. Prizes are not transferable or exchangeable and may not be converted to cash.
4. The judges decision is final, no correspondence will be entered into.
5. Description of the competition and instructions on how to enter and conditions of entry form part of the competition conditions.
6. The competition commences on September 1 and closes on last mail December 31st. The draw will take place in Sydney on January 18th, 1988, and the winner will be notified by telephone and letter. The winner will also be announced in the Australian

on January 25th and a later issue of this magazine.

7. The prize is: A 1987 Daihatsu Rocky Long Wheel Base EX model registered and pre-delivered ex Sydney Head Office of Daihatsu Australia.
8. The winner may collect the vehicle from the capital city of the state they live in if they do not wish to travel to Sydney for the prize.
9. The promoter is The Federal Publishing Company, 180 Bourke Road, Alexandria, NSW 2015. Permit No. T.C. 87/2007, issued under the Lotteries and Art Unions Act 1901; Raffles and Bingo Permits Board Permit No. 87/1297, issued on 3/8/87 ACT permit No. TP 87/617, issued under the Lotteries Ordinance 1964.



# Fibre optics

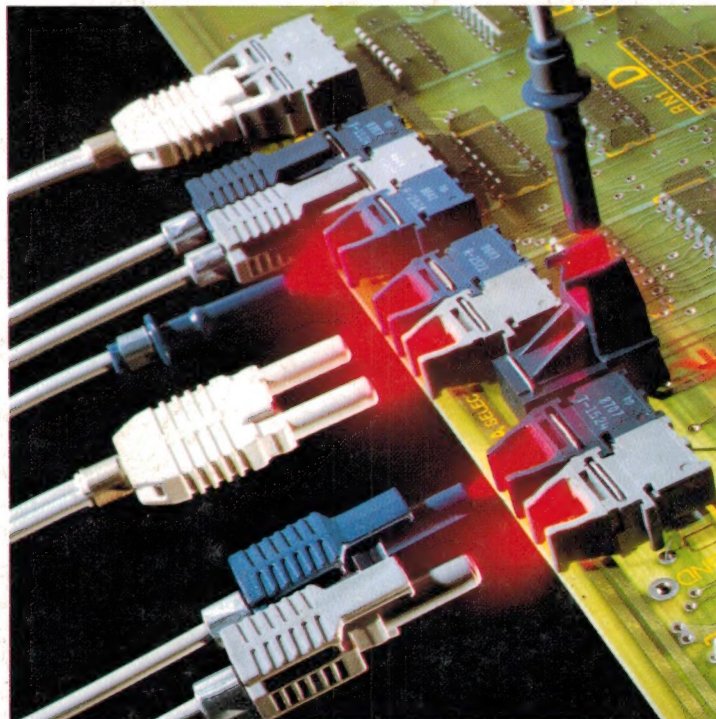

## The old limits are off design constraints.

Meet Hewlett-Packard's *Versatile Link* HFBR-0501 series of fibre optic components. Innovative HP technology now makes the noise and interference immunity of fibre optics accessible and easy to use for short-distance applications. This opens up significant new voltage isolation and data communication design possibilities in pc board intercommunications, instruments, computers and test equipment.

HP's *Versatile Link* is TTL- and CMOS-compatible. Data rates can go from DC to 5 megabits/sec. Low profile mounts allow tight board stacking. Three styles of connectors, including latching and duplex, permit almost any configuration called for by your design.

Plus, it can be auto-inserted and wave-soldered. And, no

optical design is required... making it remarkably cost-effective.

A comprehensive *Versatile Link* evaluation kit HFBR-0501 is available... so take the limits off yourself and contact Hewlett Packard's Australian distributor VSI Electronics for this and other fibre optic components.



# VSI

THE SOURCE OF  
**hp HEWLETT  
PACKARD**  
COMPONENTS

VSI Electronics (Aust.) Pty. Ltd.  
16 Dickson Avenue, ARTARMON  
NSW 2064 AUSTRALIA  
Telephone (02) 439 8622  
Telex AA 22846  
Fax (02) 439 6435

• QUEENSLAND (07) 262 5200 • VICTORIA (03) 543 6445 • SOUTH AUSTRALIA (08) 267 4333 • WESTERN AUSTRALIA (09) 328 8499

NEXUS 11/050